



Access Controller

User's Manual











Foreword

General

This manual introduces the functions and operations of the Access Controller. Read carefully before using the device, and keep the manual safe for future reference.

Safety Instructions

The following signal words might appear in the manual.

Signal Words	Meaning
 DANGER	Indicates a high potential hazard which, if not avoided, will result in death or serious injury.
 WARNING	Indicates a medium or low potential hazard which, if not avoided, could result in slight or moderate injury.
 CAUTION	Indicates a potential risk which, if not avoided, could result in property damage, data loss, reductions in performance, or unpredictable results.
 ESD	Electrostatic Sensitive Devices. Indicates a device that is sensitive to electrostatic discharge.
 ELECTRIC SHOCK	Indicates dangerous high voltage. Take care to avoid coming into contact with electricity.
 LASER RADIATION	Indicates a laser radiation hazard. Take care to avoid exposure to a laser beam.
 TIPS	Provides methods to help you solve a problem or save time.
 NOTE	Provides additional information as a supplement to the text.

Revision History

Version	Revision Content	Release Time
V1.0.6	Updated the description for holiday plan authentication.	February 2025
V1.0.5	Updated the password unlock descriptions.	November 2023
V1.0.4	Updated adding users and configuring permissions.	June 2023
V1.0.3	Updated the description on adding users.	April 2023
V1.0.2	Updated the unlock methods.	March 2023
V1.0.1	Updated the wiring.	September 2022

Version	Revision Content	Release Time
V1.0.0	First release.	September 2022

Privacy Protection Notice

As the device user or data controller, you might collect the personal data of others such as their face, audio, fingerprints, and license plate number. You need to be in compliance with your local privacy protection laws and regulations to protect the legitimate rights and interests of other people by implementing measures which include but are not limited: Providing clear and visible identification to inform people of the existence of the surveillance area and provide required contact information.

Important Safeguards and Warnings

This section introduces content covering the proper handling of the Access Controller, hazard prevention, and prevention of property damage. Read carefully before using the Access Controller, and comply with the guidelines when using it.

Transportation Requirement



Transport, use and store the Access Controller under allowed humidity and temperature conditions.

Storage Requirement



Store the Access Controller under allowed humidity and temperature conditions.

Installation Requirements



WARNING

- Do not connect the power adapter to the Access Controller while the adapter is powered on.
- Strictly comply with the local electric safety code and standards. Make sure the ambient voltage is stable and meets the power supply requirements of the Access Controller.
- Do not connect the Access Controller to two or more kinds of power supplies, to avoid damage to the Access Controller.
- Improper use of the battery might result in a fire or explosion.
- Please follow the electrical requirements to power the Access Controller.
 - ◇ Following are the requirements for selecting a power adapter.
 - The power supply must conform to the requirements of IEC 60950-1 and IEC 62368-1 standards.
 - The voltage must meet the SELV (Safety Extra Low Voltage) requirements and not exceed ES-1 standards.
 - When the power of the device does not exceed 100 W, the power supply must meet LPS requirements and be no higher than PS2.
 - ◇ We recommend using the power adapter provided with the Access Controller.
 - ◇ When selecting the power adapter, the power supply requirements (such as rated voltage) are subject to the Access Controller label.



- Personnel working at heights must take all necessary measures to ensure personal safety including wearing a helmet and safety belts.
- Do not place the Access Controller in a place exposed to sunlight or near heat sources.
- Keep the Access Controller away from dampness, dust, and soot.
- Install the Access Controller on a stable surface to prevent it from falling.
- Install the Access Controller in a well-ventilated place, and do not block its ventilation.

- Use an adapter or cabinet power supply provided by the manufacturer.
- Use the power cords that are recommended for the region and conform to the rated power specifications.
- The Access Controller is a class I electrical appliance. Make sure that the power supply of the Access Controller is connected to a power socket with protective earthing.

Operation Requirements



- Check whether the power supply is correct before use.
- Ground the device to protective ground before you power it on.
- Do not unplug the power cord on the side of the Access Controller while the adapter is powered on.
- Operate the Access Controller within the rated range of power input and output.
- Use the Access Controller under allowed humidity and temperature conditions.
- Do not drop or splash liquid onto the Access Controller, and make sure that there is no object filled with liquid on the Access Controller to prevent liquid from flowing into it.
- Do not disassemble the Access Controller without professional instruction.
- This product is professional equipment.
- The Access Controller is not suitable for use in locations where children are likely to be present.

Table of Contents

Foreword.....	I
Important Safeguards and Warnings.....	III
1 Product Overview.....	1
1.1 Product Introduction.....	1
1.2 Main Features.....	1
1.3 Application Scenarios	1
2 Main Controller-Sub Controller.....	3
2.1 Networking Diagram.....	3
2.2 Configurations of Main Controller.....	3
2.2.1 Configuration Flowchart.....	3
2.2.2 Initialization.....	4
2.2.3 Logging In.....	5
2.2.4 Dashboard.....	10
2.2.5 Home Page.....	11
2.2.6 Adding Devices.....	12
2.2.7 Adding Users.....	14
2.2.8 Adding Weekly Plans.....	29
2.2.9 Adding Holiday Plans (Optional).....	30
2.2.10 Adding Areas.....	32
2.2.11 Adding Permission Rules.....	32
2.2.12 Viewing Authorization Progress.....	35
2.2.13 Configuring Access Control (Optional)	36
2.2.14 Configuring the Password Unlock.....	40
2.2.15 Configuring Global Alarm linkages (Optional).....	40
2.2.16 Configuring First Card Unlock.....	42
2.2.17 Configuring Multi-Person Unlock.....	44
2.2.18 Configuring Anti-Passback.....	46
2.2.19 Configuring Multi-Door Interlock.....	48
2.2.20 Access Monitoring (Optional)	50
2.2.21 Local Device Configurations (Optional).....	51
2.2.22 Viewing Records.....	68
2.2.23 Security Settings(Optional)	69
2.3 Configurations of Sub Controller.....	79
2.3.1 Initialization.....	79
2.3.2 Logging In.....	79
2.3.3 Home Page.....	79
3 Smart PSS Lite-Sub Controllers.....	80

3.1 Networking Diagram.....	80
3.2 Configurations on SmartPSS Lite.....	80
3.3 Configurations on Sub Controller.....	80
Appendix 1 Security Commitment and Recommendation.....	81

1 Product Overview

1.1 Product Introduction

Flexible and convenient, the Access Controller has a user friendly system that allows you to access controllers on the webpage through IP address. It comes with a professional access management system, and makes the networking of main and sub control modes quick and easy, meeting the needs of small and advanced systems.

1.2 Main Features


- Built of flame-retardant PC and ABS material, it is both sturdy and elegant with an IK06 rating.
- Supports TCP and IP connection, and standard PoE.
- Accesses card readers through Wiegand and RS-485 protocols.
- Supplies power to the lock through its 12 VDC output power supply, which has a maximum output current of 1000 mA.
- Supports 1000 users, 5000 cards, 3000 fingerprints, and 300,000 records.
- Multiple unlock methods including card, password, fingerprint and more. You can also combine these methods to create your own personal unlock methods.
- Multiple types of alarms events are supported, such as duress, tampering, intrusion, unlock timeout, and illegal card.
- Supports a wide range of users including general, patrol, VIP, guest, blocklisted, and more users.
- Manual and automatic time synchronization.
- Retains stored data even while powered off.
- Offers a variety of functions and the system can be configured. Devices can also be updated through the webpage.
- Features main and sub control modes. The main control mode offers user management, access control device management and configuration, and more options. Devices under sub-control modes can be added to multiple platforms.
- A main controller can connect with and manage up to 19 sub controllers.
- Watchdog protects the system to allow the device to be stable and perform efficiently.
- Sub controllers can be added to SmartPSS Lite and DSS Pro.

1.3 Application Scenarios

It is widely used in parks, communities, business centers and factories, and ideal for places such as office buildings, government buildings, schools and stadiums.

The Access Controller can be set to the main access controller (herein referred to as main controller) or the Sub Access Controller (herein referred to as sub-controller). 2 different networking methods are available for the Access Controller. You can select a networking method based on your needs.

Table 1-1 Networking methods of access controller


Networking methods	Description
Main Controller—Sub Controller	<p>The main controller comes with a management platform (herein referred to as the Platform). Sub-controllers must be added to the Platform of the main controller. The main controller can manage up to 19 sub controllers. For details, see "2 Main Controller-Sub Controller".</p>  <p>We do not recommend you add other management platforms in this networking method.</p>
SmartPSS Lite—Sub Controller	<p>Sub controllers needs to be added to a standalone management platform, such as SmartPSS Lite. The platform can manage up to 64 doors if each sub controller connects 2 doors. For details, see "3 Smart PSS Lite-Sub Controllers".</p>

2 Main Controller-Sub Controller

2.1 Networking Diagram

The main controller comes with a management platform (herein referred as the platform). Sub controller needs to be added to the platform of the main controller. The main controller can manage up to 19 sub controllers.


Figure 2-1 Networking diagram

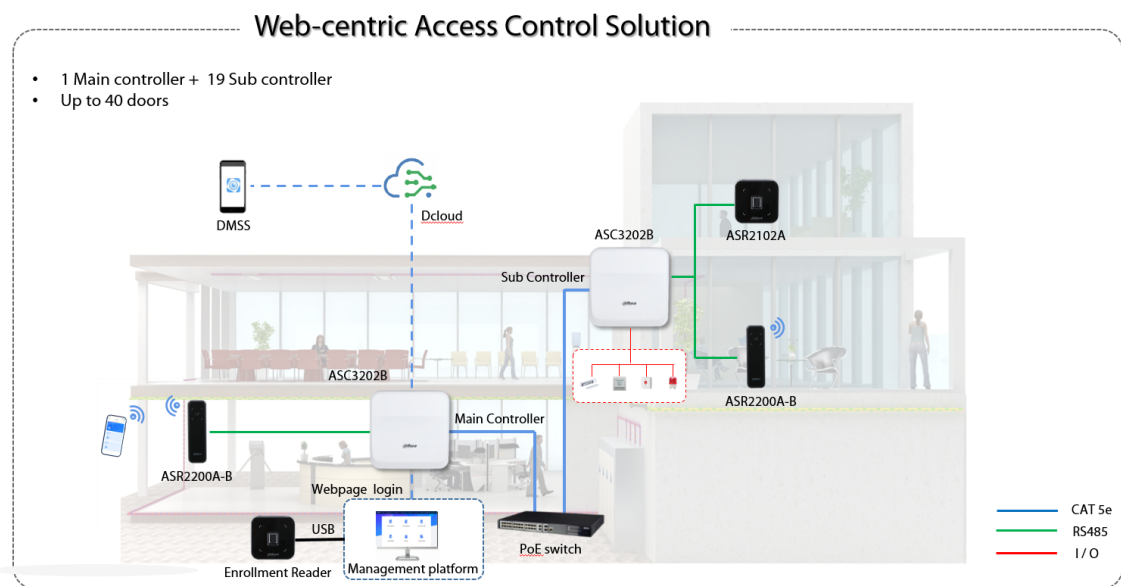

2.2 Configurations of Main Controller

2.2.1 Configuration Flowchart

Figure 2-2 Configuration flowchart

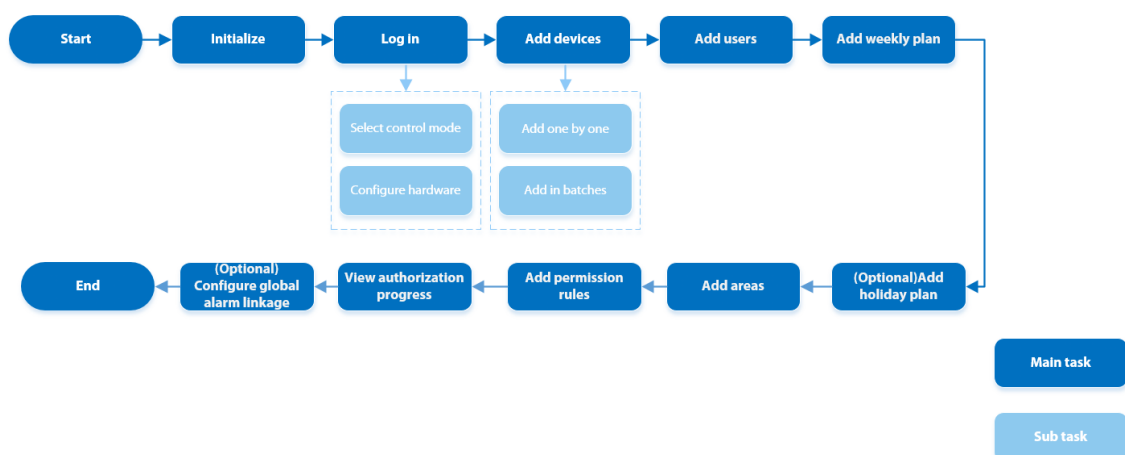

2.2.2 Initialization

Initialize the main controller when you log in to the webpage for the first time or after it is restored to its factory defaults.

Prerequisites

Make sure that the computer used to log in to the webpage is on the same LAN as the main controller.

Procedure

Step 1 Open a browser, go to the IP address (the IP address is 192.168.1.108 by default) of the main controller.



We recommend you use the latest version of Chrome or Firefox.

Step 2 Select a language, and then click **Next**.


Step 3 Set the password and email address.



- The password must consist of 8 to 32 non-blank characters and contain at least two types of the following characters: upper case and lower case letters, numbers, and special characters (excluding ' " ; : &). Set a high-security password by following the password strength prompt.
- Keep the password safe after initialization and change the password regularly to improve security.

Step 4 Configure the system time, and then click **Next**.

Figure 2-3 Configure the time

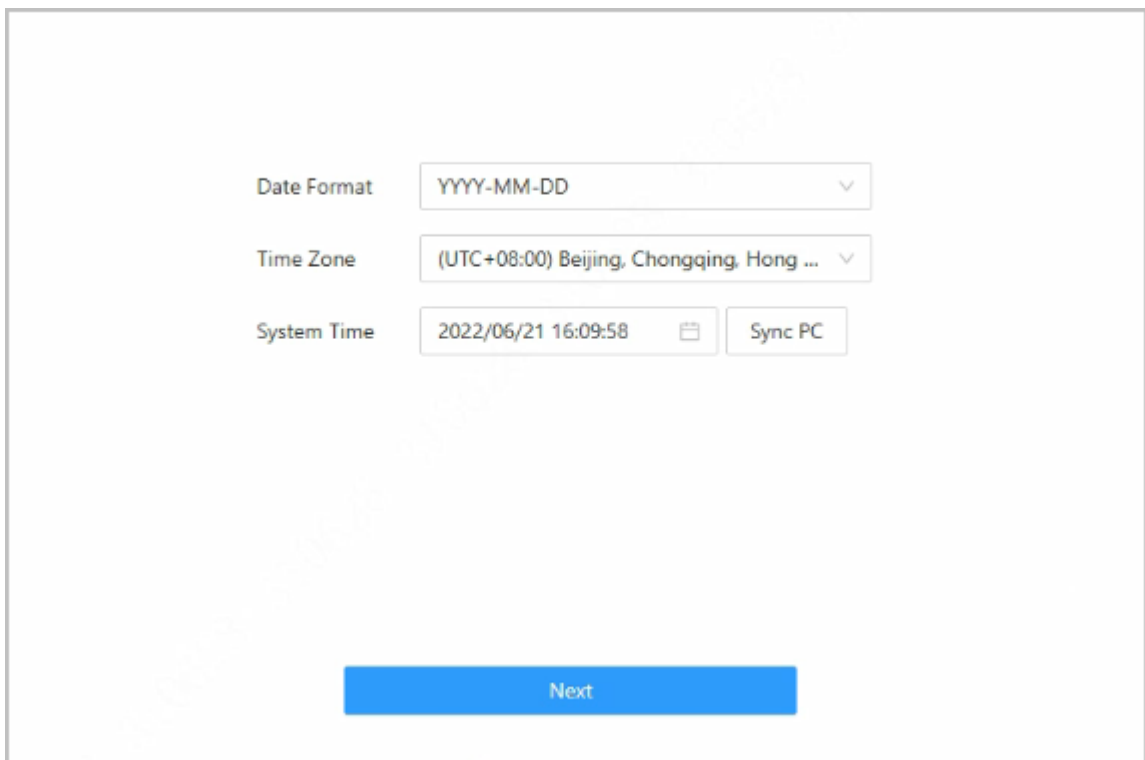

The screenshot shows a web interface for configuring system time. It includes three rows of settings:

- Date Format:** A dropdown menu showing 'YYYY-MM-DD'.
- Time Zone:** A dropdown menu showing '(UTC+08:00) Beijing, Chongqing, Hong Kong, ...'.
- System Time:** A text field showing '2022/06/21 16:09:58' with a calendar icon to its right and a 'Sync PC' button.

At the bottom center, there is a large blue button labeled 'Next'.

Step 5 (Optional) Select **Auto Check for Updates** , and then click **Completed**.

The system automatically check is there any higher version available, and inform the user to update the system. The system automatically checks for new updates, and informs you when a new update is available.

Step 6 Click **Completed**.

The system automatically goes to the login page after initialization is successful.

2.2.3 Logging In

For first-time login during initialization, you need to follow the login wizard to configure the type of main controller and its hardware.

Procedure


Step 1 On the login page, enter the username and password.




- The default administrator name is admin, and the password is the one you set during initialization. We recommend you change the administrator password regularly to increase the security of the platform.
- If you forget the administrator login password, you can click **Forgot password?**.

Step 2 Select **Main Control**, and then click **Next**.


Figure 2-4 Type of access controller

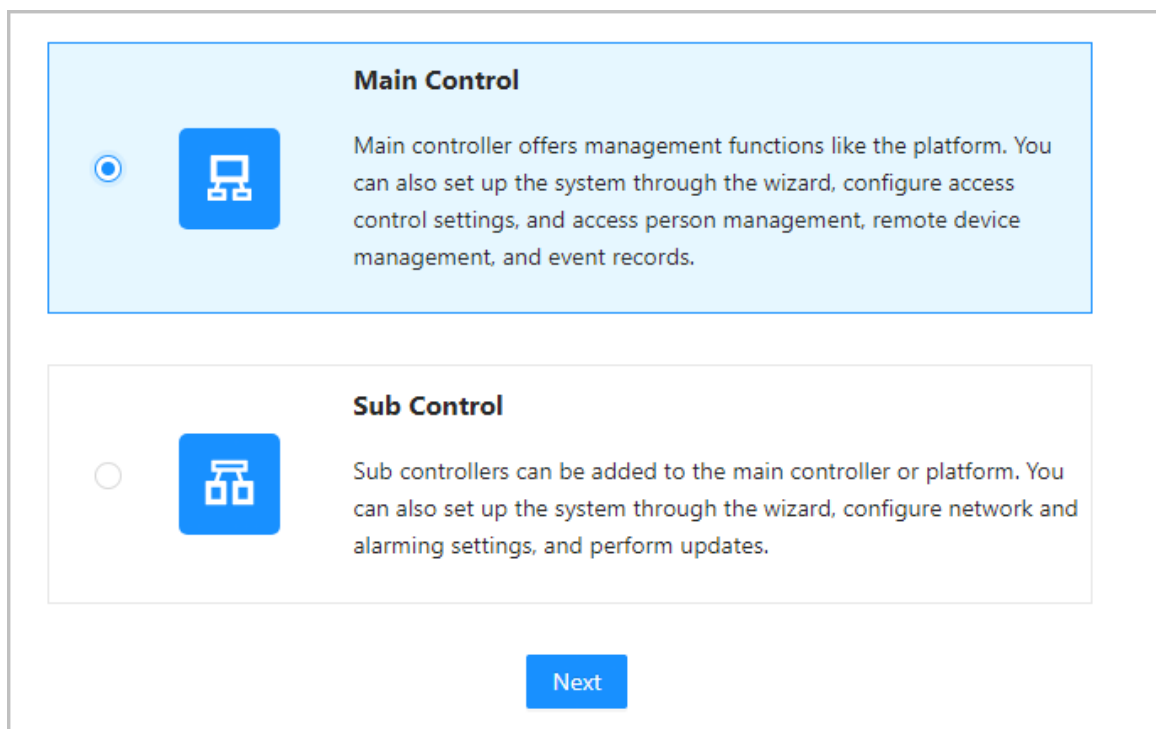

Main Control

☒  Main controller offers management functions like the platform. You can also set up the system through the wizard, configure access control settings, and access person management, remote device management, and event records.

Sub Control

☐  Sub controllers can be added to the main controller or platform. You can also set up the system through the wizard, configure network and alarming settings, and perform updates.

Next

- **Main Control:** The main controller comes with a management platform. You can manage all sub-controllers, configure access control, access personal management on the platform, and more.
- **Sub Control:** Sub controllers needs to be added to the management platform of the main controller or other management platforms such as DSS Pro or SmartPSS Lite. You can perform the configurations on the webpage of the sub-controller.

Step 3 Select the number of doors, and then enter the name of the door.

Step 4 Configure the parameters of the doors.

Figure 2-5 Configure door parameters

Door1

☒ Entry Card Reader

Card Reader Protocol

☐ Wiegand

Single

LED

☐ OSDP
☒ RS-485

☒ Exit Button
☐ Door Detector

Power Supply of Locks

☒ 12V

Fail Secure

☐ Relay

Relay Open = Locked

Door2

☒ Entry Card Reader

Card Reader Protocol

☐ Wiegand

Single

LED

☐ OSDP
☒ RS-485

☒ Exit Button
☐ Door Detector

Power Supply of Locks

☒ 12V

Fail Secure


☐ Relay

Relay Open = Locked

Back
Next

Table 2-1 Parameter description

Parameter	Description
Entry Card Reader	Select the card reader protocol. <ul style="list-style-type: none"> Wiegand: Connects to a Wiegand reader. You can connect the LED wire to the LED port of the controller, and the reader will beep and flash when the door unlocks. OSDP: Connects to an OSDP reader. RS-485: Connects to a RS-485 reader.
Exit Button	Connects to an exit button.
Door Detector	Connects to a door detector.

Parameter	Description
Power Supply of Locks	<ul style="list-style-type: none"> ● 12 V: The controller provides power to the lock. <ul style="list-style-type: none"> ◇ Fail secure: When the power is interrupted or fails, the door stays locked. ◇ Fail safe: When the power is interrupted or fails, the door automatically unlocks to let people leave. ● Relay: The relay supplies power for the lock. <ul style="list-style-type: none"> ◇ Relay open = locked: Sets the lock to remain locked when the relay is open. ◇ Relay open = unlocked: Sets the lock to unlock when the relay is open.  <p>The electromagnetic lock unlocks in an instant and locks again immediately when the Access Controller is in the soft reboot.</p>

Step 5 Configure access control parameters.

Step 6 In **Unlock Settings**, select **Or** or **And** from **Combination Method**.

- Or: Use one of the selected unlock methods to authorize opening the door.
- And: Use all of the selected unlock methods to authorize opening the door.



Bluetooth card cannot be selected when you set the combination method to **And**.

Step 7 Select the unlock methods, and then configure the other parameters.

Figure 2-6 Unlock settings

Unlock Settings

Unlock Mode

Combination Unlock

Combination Method

☒ Or
☐ And

Unlock Method (Multi-select)

☒ Card
☒ Fingerprint
☒ Password
☒ Bluetooth Card

Bluetooth Mode

☐ Short-range
☒ Mid-range
☐ Long-range

Door Unlocked Duration


s (0.2-600)

Unlock Timeout

s (1-9999)

Table 2-2 Unlock settings description

Parameter	Description
Unlock Method (Multi-select)	Supports unlocking through card, fingerprint, password or Bluetooth card. The Bluetooth card function is turned off by default.

Parameter	Description
Bluetooth Mode	<p>The Bluetooth card must be a certain distance away from the access control device to exchange data and unlock the door. Following are the ranges that are most suitable for it.</p> <ul style="list-style-type: none"> • Short-range: The Bluetooth unlock range is less than 0.2 m. • Mid-range: The Bluetooth unlock range is less than 2 m. • Long-range: The Bluetooth unlock range is less than 10 m. <p></p> <p>The Bluetooth unlock range might differ depending on models of your phone and the environment.</p>
Door Unlock Duration	After a person is granted access, the door will remain unlocked for a defined time for them to pass through. It ranges from 0.2 s to 600 s.
Unlock Timeout	A timeout alarm is triggered when the door remains unlocked for longer than the defined value.

Step 8 In **Alarm Settings**, configure the alarm parameters.

Figure 2-7 Alarm

Alarm Settings

Duress Alarm

☒

Door Detector

☒

☒ Normally Open
 ☐ Normally Close

Intrusion Alarm

☒

☐ Card reader beeps

Unlock Timeout Alarm

☒

☐ Card reader beeps

Table 2-3 Description of alarm parameters

Parameter	Description
Duress Alarm	An alarm will be triggered when a duress card, duress password or duress fingerprint is used to unlock the door.
Door Detector	Select the type of door detector.
Intrusion Alarm	<ul style="list-style-type: none"> • When the door detector is enabled, an intrusion alarm will be triggered if the door is opened abnormally. • A timeout alarm will be triggered when the door remains unlocked for longer than the defined unlock time. • When Card reader beeps is enabled, the card reader beeps when the intrusion alarm or timeout alarm is triggered.
Unlock Timeout Alarm	


Step 9 Click **Next**.

A wiring diagram is generated based on your configurations. You can wire the device according to the diagram.



The image below is for reference only.

Figure 2-8 Wiring diagram

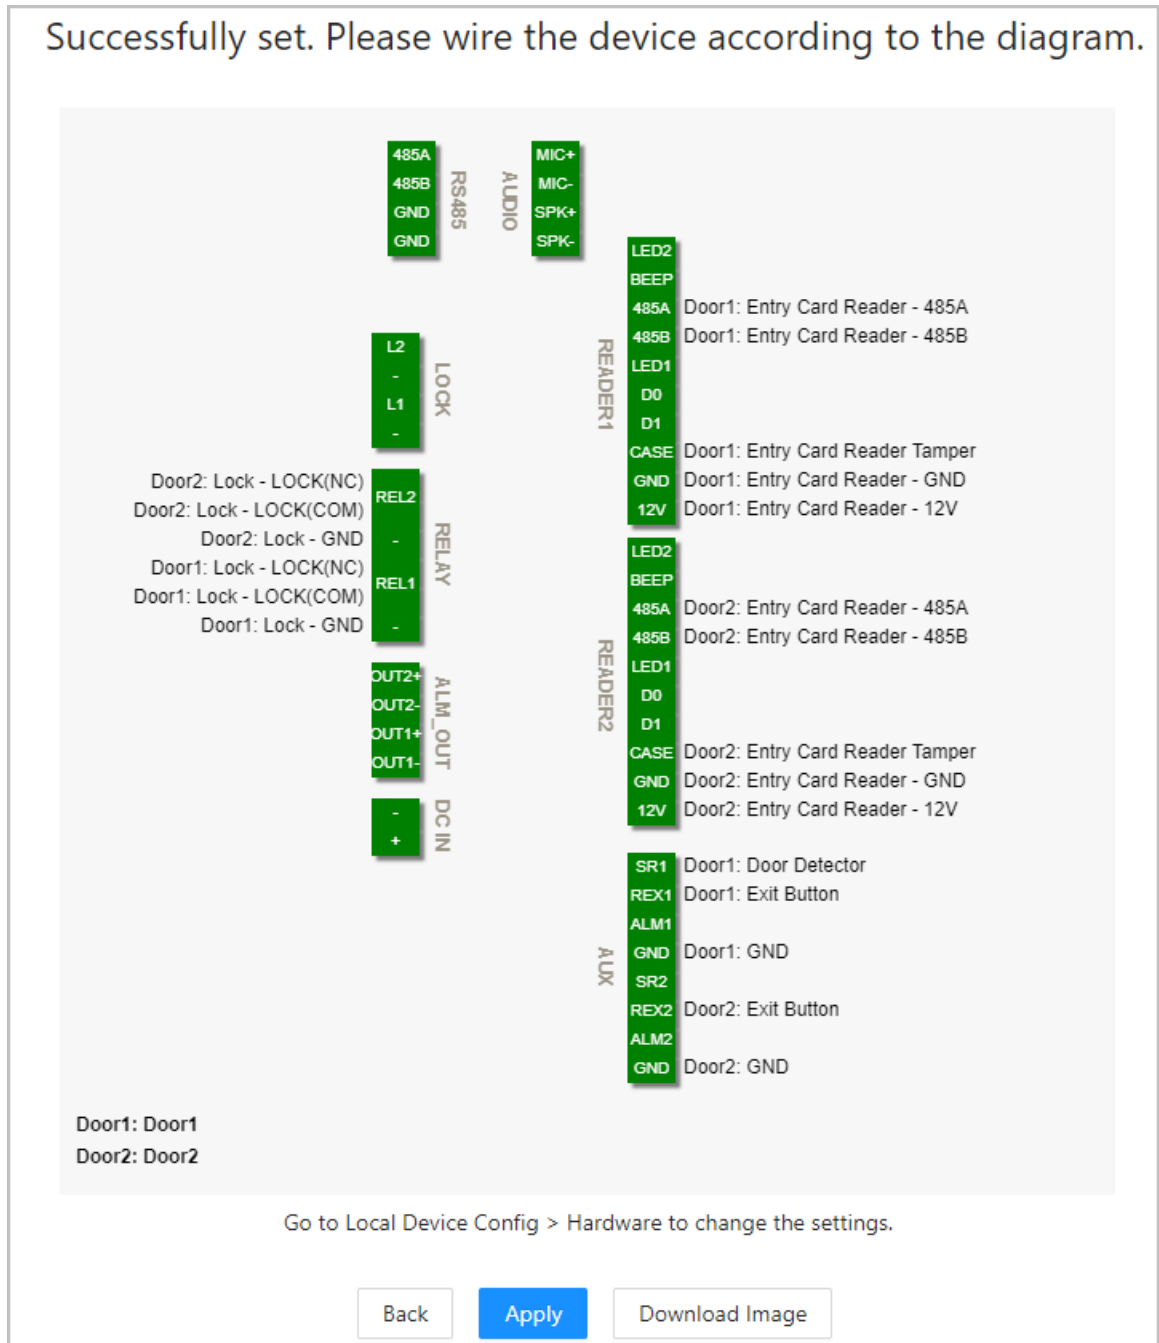

Step 10 Click **Apply**.

- You can go to **Local Device Config** > **Hardware** to change the settings after you successfully log in to the platform.
- Click **Download Image** to download the diagram to your computer.

Related Operations

If you want to change the settings of the hardware, go to **Local Device Config** > **Hardware**.

2.2.4 Dashboard

After you successfully log in, the dashboard page of the platform is displayed. The dashboard is displayed showing visualized data.

Figure 2-9 Dashboard

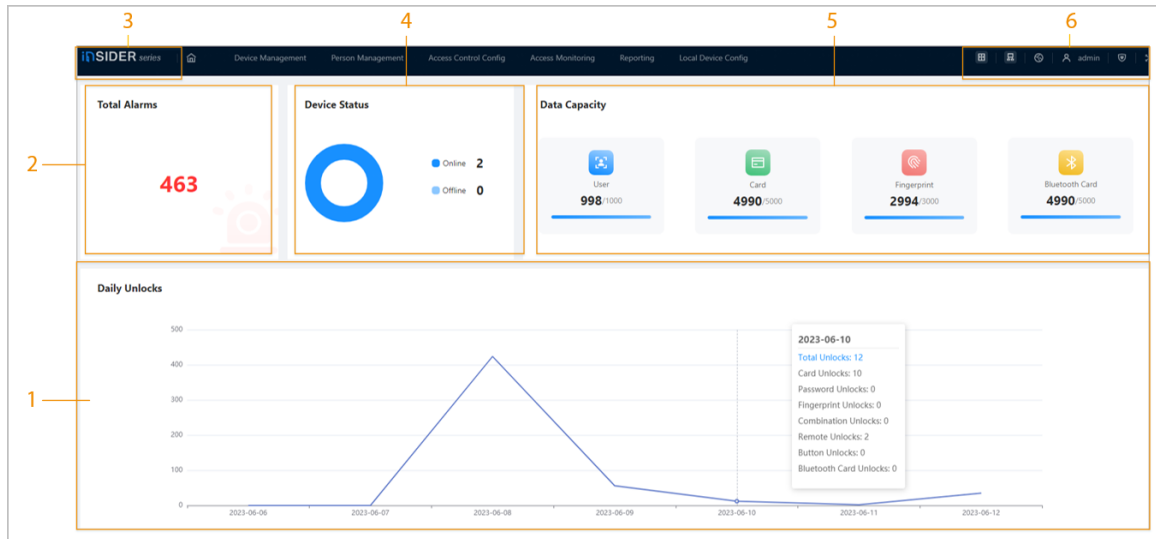











Table 2-4 Home page description

No.	Description
1	Displays the unlock methods used for the day. Hover over a day to see the type of unlocks used for that day.
2	Displays the total number of alarms.
3	<ul style="list-style-type: none"> Click to go to the dashboard page. Click iNSIDER series to go to the dashboard page. Click  to go to the home page of the platform.
4	Displays the status of devices, including offline devices and online devices.
5	Displays the data capacity of cards, fingerprints and Bluetooth cards.

No.	Description
6	<ul style="list-style-type: none"> The number of doors of the controller. <ul style="list-style-type: none"> ◇ : Double door ◇ : Single door The type of the controller. <ul style="list-style-type: none"> ◇ : Main controller. ◇ : Sub controller. : Select the language of the platform. : Go to the Security page directly. : Restart or log out of the platform. : Display the webpage in full screen.

2.2.5 Home Page

After you successfully log in, the home page of the main controller is displayed.

Figure 2-10 Home page

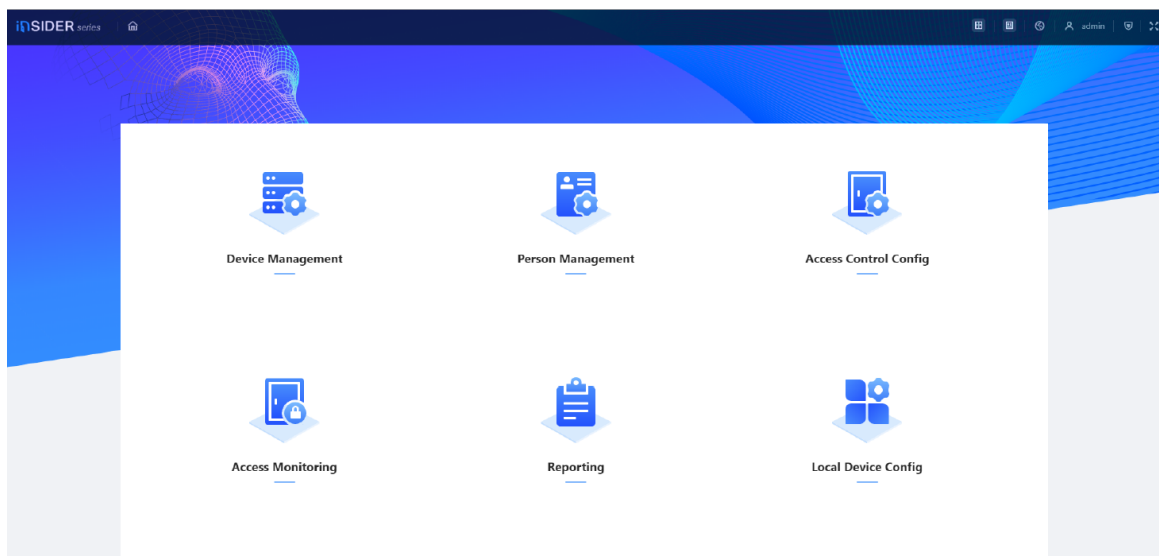


Table 2-5 Home page description

Menu	Description
Device Management	Add devices to the platform of the main controller.
Person Management	Add personnel and assign area permissions to them.
Access Control Config	Add time templates, create and assign area permissions, configure door parameters and global alarm linkages, and view the permission authorization progress.
Access Monitoring	Remotely control the doors and view event logs.
Reporting	View and export alarm records and unlock records.

Menu	Description
Local Device Config	Configure parameters for the local device, such as network and local alarm linkage.

2.2.6 Adding Devices

You can add devices to the management platform of the main controller in batches or one by one. If the controller was set to the main controller while you were going through the login wizard, you can add and manage sub controllers through the Platform.



Only the main controller comes with a management platform.

2.2.6.1 Adding Device One by One

You can add sub controllers to the main controller one by one.

Procedure

- Step 1** On the home page, click **Device Management**, and then click **Add**.
Step 2 Enter the device information.

Figure 2-11 Device information

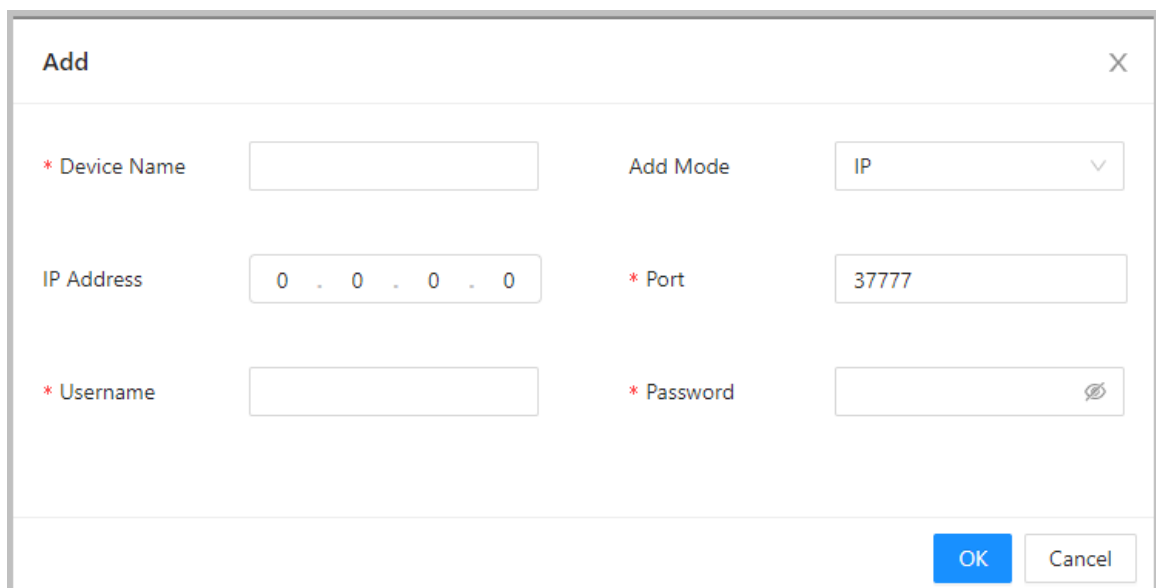


Table 2-6 Device parameters Description

Parameter	Description
Device Name	Enter the name of the Controller. We recommend you name it after its installation area.
Add Mode	Select IP to add the Access Controller by entering its IP address.
IP Address	Enter the IP address of the controller.
Port	The port number is 37777 by default.
Username/Password	Enter the username and password of the Controller.

Step 3 Click **OK**.

The added controllers are displayed on the **Device Management** page.


Figure 2-12 Successfully add devices

<div> Add Search Device Modify IP Sync Time Delete Total Devices 1 Online Devices 1 </div>									
No.	Device Name	IP Address	Device Type	Device Model	Port	Connection Status	SN	Operation	
1	80000E7F19A02250	192.168.1.1	Access Controller	DSW-VSC3200B	37777	Online	80000E7F19A02250	Edit Go to Webpage Log out Delete	






If the controller was set as the main controller while you were going through the login wizard, the controller will be added to the management platform automatically and function as both the main controller and sub controller.

Related Operations

-  : Edit the information on the device.



Only sub controllers support the below operations.

-  : Go to the webpage of the sub controller.
-  : Log out of the device.
-  : Delete the device.

2.2.6.2 Adding Devices in Batches


We recommend you use the auto-search function when you add sub controllers in batches. Make sure the sub controllers you want to add are on the same network segment.

Procedure

Step 1 On the home page, Click **Device Management** , and then click **Search Device**.

- Click **Start Search** to search for devices on the same LAN.
- Enter a range for the network segment, and then click **Search**.

Figure 2-13 Auto search

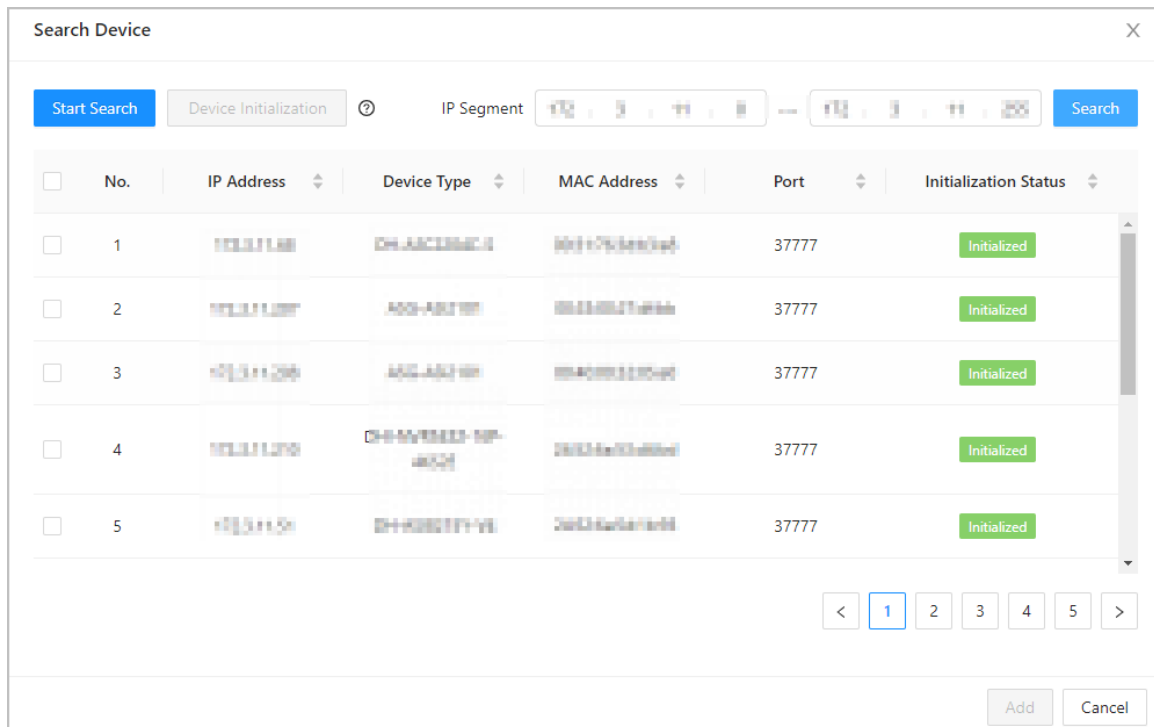

No.	IP Address	Device Type	MAC Address	Port	Initialization Status
1	192.168.1.1	CH-AC-1000-1	0011-75-40-0001	37777	Initialized
2	192.168.1.2	AGG-AS-1000	0011-75-40-0002	37777	Initialized
3	192.168.1.3	AGG-AS-1000	0011-75-40-0003	37777	Initialized
4	192.168.1.4	CH-SW-1000-1	0011-75-40-0004	37777	Initialized
5	192.168.1.5	CH-SW-1000-2	0011-75-40-0005	37777	Initialized

All devices that were searched for will be displayed.



To ensure the security of devices, initialization is not supported for devices on different segments.



You can select devices from the list, and click **Device Initialization** to initialize them in batches.

Step 2 Select the Controllers that you want to add to the Platform, and then click **Add**.

Step 3 Enter the username and password of the sub controller, and then click **OK**.

The added sub controllers are displayed on the **Device Management** page.

Related Operations

- **Modify IP:** Select added devices, and then click **Modify IP** to change their IP addresses.
- **Sync Time:** Select added devices, and then click **Sync Time** to sync the time of the devices with the NTP server.
- **Delete:** Select the devices, and then click **Delete** to delete them.

2.2.7 Adding Users

Add users to departments. Enter basic information for users and set verification methods to verify their identities.

Related Operations

- **Export all the users to Excel:** On the **Person Management** page, click **Export** to export all users. You can also import the exported user information to other controllers.



To prevent data loss caused by force majeure damage to the equipment, it is recommended to regularly export user data for backup purposes.

- Import users: On the **Person Management** page, click **Download Template**, enter user information in the template, and then click **Import** to import all users.
- Extract all the users: On the **Person Management** page, click **More** > **Extract Person Info**, and select a device to extract all the users from the sub controller and send them to them the Platform of the main controller.

2.2.7.1 Adding Departments

Procedure

Step 1 On the home page, select **Person Management**.


Step 2 Create a department.

1. Click **+**.
2. Enter the name of the department, and then click **Add**.



The default department cannot be deleted.

Figure 2-14 Add department

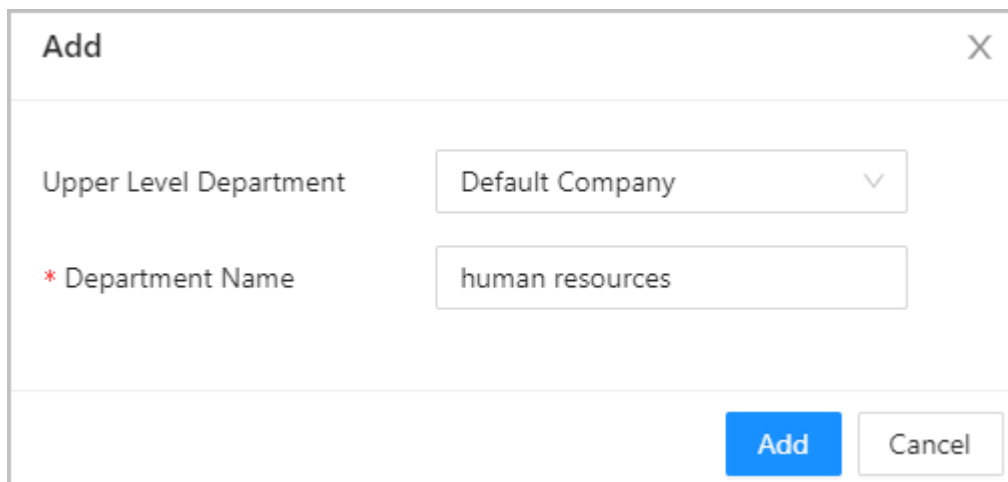

Step 3 Click **OK**.

2.2.7.2 Adding Roles

Procedure

Step 1 On the home page, select **Person Management**.

Step 2 Create roles.



- The following roles already exist and cannot be modified or deleted: Default, Manager, Administrator, Visitor and Employee.
- The only general user type with manager role has the highest authority and it is not limited by advanced access rules, such as first card unlock, multi-person unlock, anti-passback, always closed door and unlock methods.

1. Click **+**.
2. Enter the name of the role, and then click **Add**.

2.2.7.3 Configuring Basic User Information

Procedure

- Step 1** On the home page, select **Person Management**.
- Step 2** Add users.
- Add users one by one.
 1. Click **Add**, and then enter the basic information for the user.

Figure 2-15 Basic information on the user

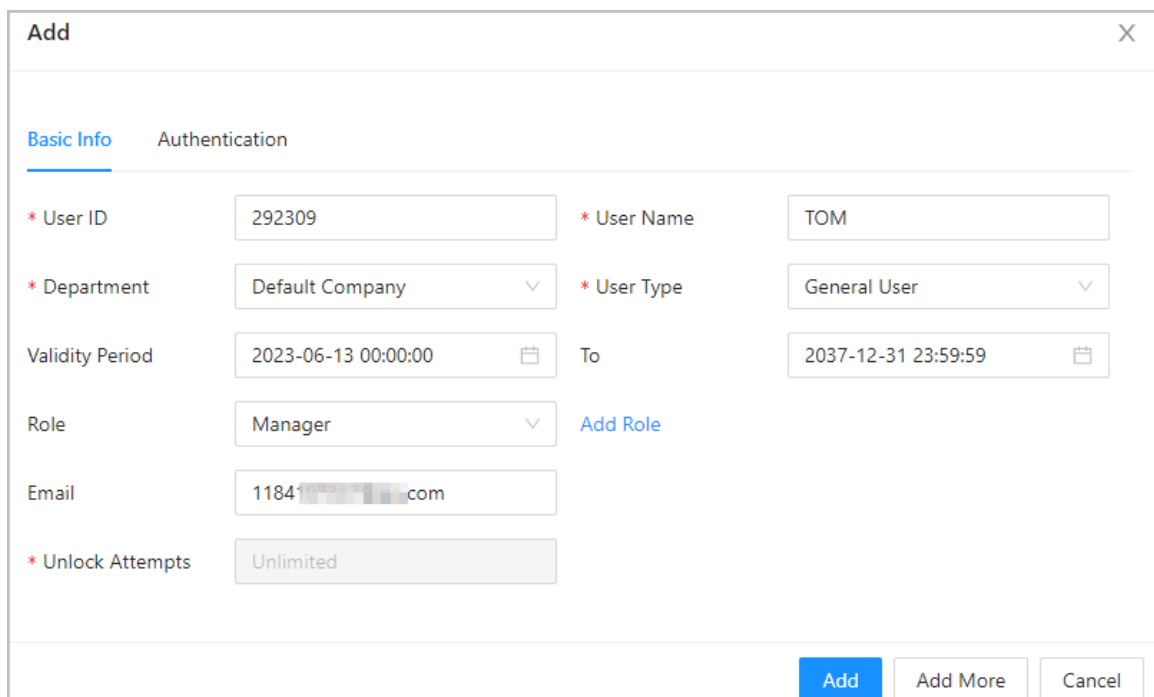


Table 2-7 Parameters description

Parameter	Description
User ID	The ID of the user.
Department	The department that the user belongs to. For details on how to create departments, see "2.2.7.1 Adding Departments".
Validity Period	Set a date on which the access permissions of the person will become effective.
Role	Assign an existing role to the user. You can also click Add Role to create a new role.
Email	The email address must be the same as the one that was used to sign up for DMSS.
To	Set a date on which the access permissions of the person will expire.
User Name	The name of the user.

Parameter	Description
User Type	<p>The type of user.</p> <ul style="list-style-type: none"> ◇ General User : General users can unlock the door. ◇ VIP User : When the VIP unlocks the door, service personnel will receive a notice. ◇ Guest User : Guests can unlock the door within a defined period or for a set number of times. After the defined period expires or the number of times for unlocking runs out, they cannot unlock the door. ◇ Patrol User : Patrol users will have their attendance tracked, but they have no permission to unlock the door. ◇ Blocklist User : When users in the blocklist unlock the door, service personnel will receive a notification. ◇ Other User : When they unlock the door, the door will stay unlocked for 5 more seconds.
Unlock Attempts	The number of times a guest user can unlock the door.

2. Click **Add**.

You can click **Add More** to add more users.

- Add users through importing the template.
 1. Click **Import** > **Download Template** to download the user template.
 2. Enter user information in the template, and then save it.
 3. Click **Import**, and upload the template to the Platform.

The users are added to the Platform automatically.

- Use **Quick Add** to easily add users.
 1. Click **Quick Add**.
 2. Enter the start number of the user ID, and the quantity.

The platform will generate a sequence of numbers starting from the defined start number. For example, if the start number is 999, and the quantity is 5, the system will generate a sequence of numbers from 999 to 1003.

Figure 2-16 Quick add

Quick Add

* Start No.

999

* Quantity

5

Department

Default Company\A\B

Role

Default

Effective Time

2023-06-13 00:00:00 → 2037-12-31 23:59:59

User ID	Card Number
999	890
1000	789
1001	
1002	
1003	

Issue Card Config

Card Reader

Enrollment Reader

Modify

Card Number

Press the Enter key to enter.

Start Issuing Cards

Add

Cancel


3. Select the department, role and the effective time.
4. Issue cards to the users in batches.

You can manually enter the card number, or use the enrollment reader or card reader to read the card number. For details, see "2.2.7.4.2 Adding Cards".

Related Operations

Batch Edit: Edit personal information in batches.

Figure 2-17 Batch edit

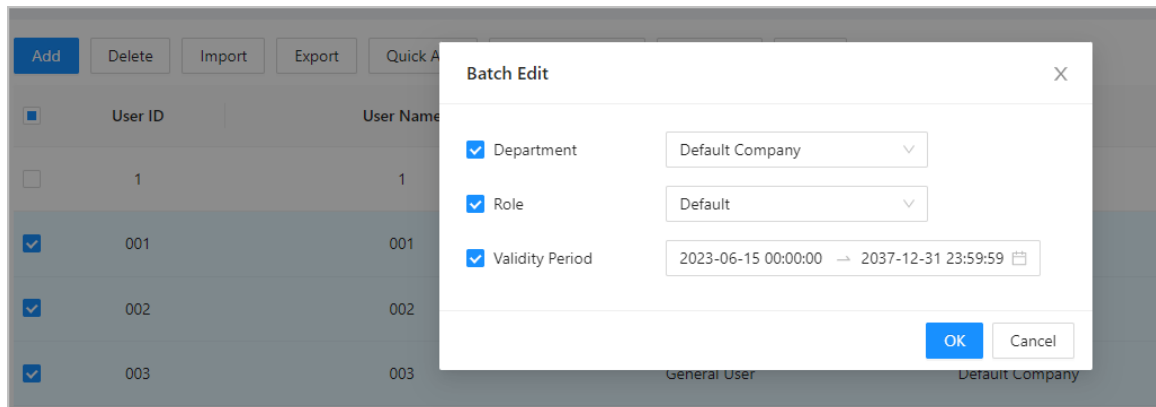

2.2.7.4 Adding Authentication Methods

Add password, cards, fingerprint or Bluetooth cards to users, so that users can unlock the door through authentication. Each user can have up to 1 password, 5 IC/ID cards, 3 fingerprints, and 5 Bluetooth cards.


2.2.7.4.1 Adding Passwords

Add passwords to users for them to gain access by entering their password.

Procedure

- Step 1 On the **Authentication** tab, click **Add**
- Step 2 Enter and confirm the password.
- Step 3 Click **OK**.

Figure 2-18 Add the password

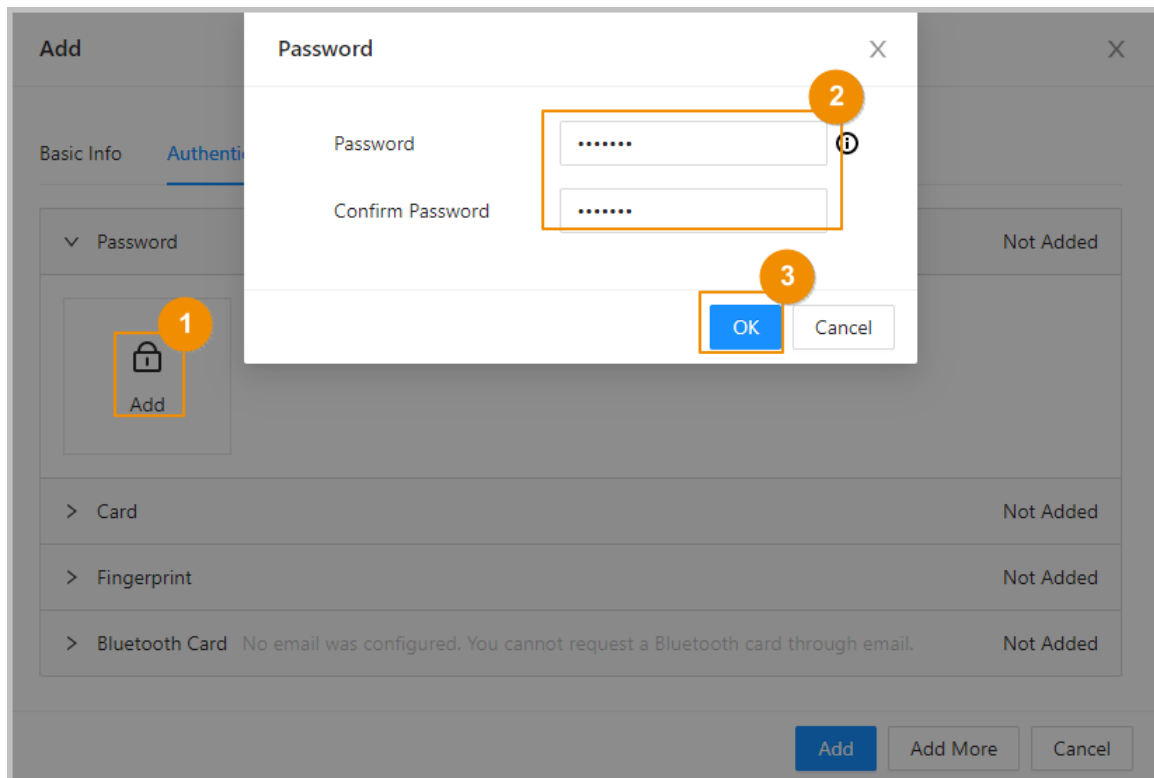

- If Pin code authentication is not enabled, you can unlock the door by entering the unlock password in the format of **user ID#password#** . For example, if the user ID is 123, and the password you set is 12345, and then you must enter **123#12345#** to unlock the door.
- If Pin code authentication is enabled, you can unlock the door by entering the unlock password in the format of **password#** . For example, if the user ID is 123, and the password you set is 12345, and then you must enter **12345#** to unlock the door.

2.2.7.4.2 Adding Cards

Add IC cards or ID cards to users for them to gain access by swiping their cards.

Procedure

Step 1 (Optional) Before you assign cards to users, set the card type and the type of card number.

1. On the **Person Management** page, select **More > Card Type**.
2. If you plan on issuing cards through using enrollment reader, select a card type, and then click **OK**.



Make sure that the card type is the same as the card type that will be issued when you plan on issuing cards through using enrollment reader.


3. Select **More > Card No. System**.
4. Select decimal format or hexadecimal format for the card number.

Step 2 On the **Authentication** tab, click **Card** to add cards.

4 methods are available to add cards.


- Enter the card number manually.
 1. Click **Add**.
 2. Enter the card number, and then click **Add**.
- Use the enrollment reader to read the card number.

Figure 2-19 Use the enrollment reader to read the card number

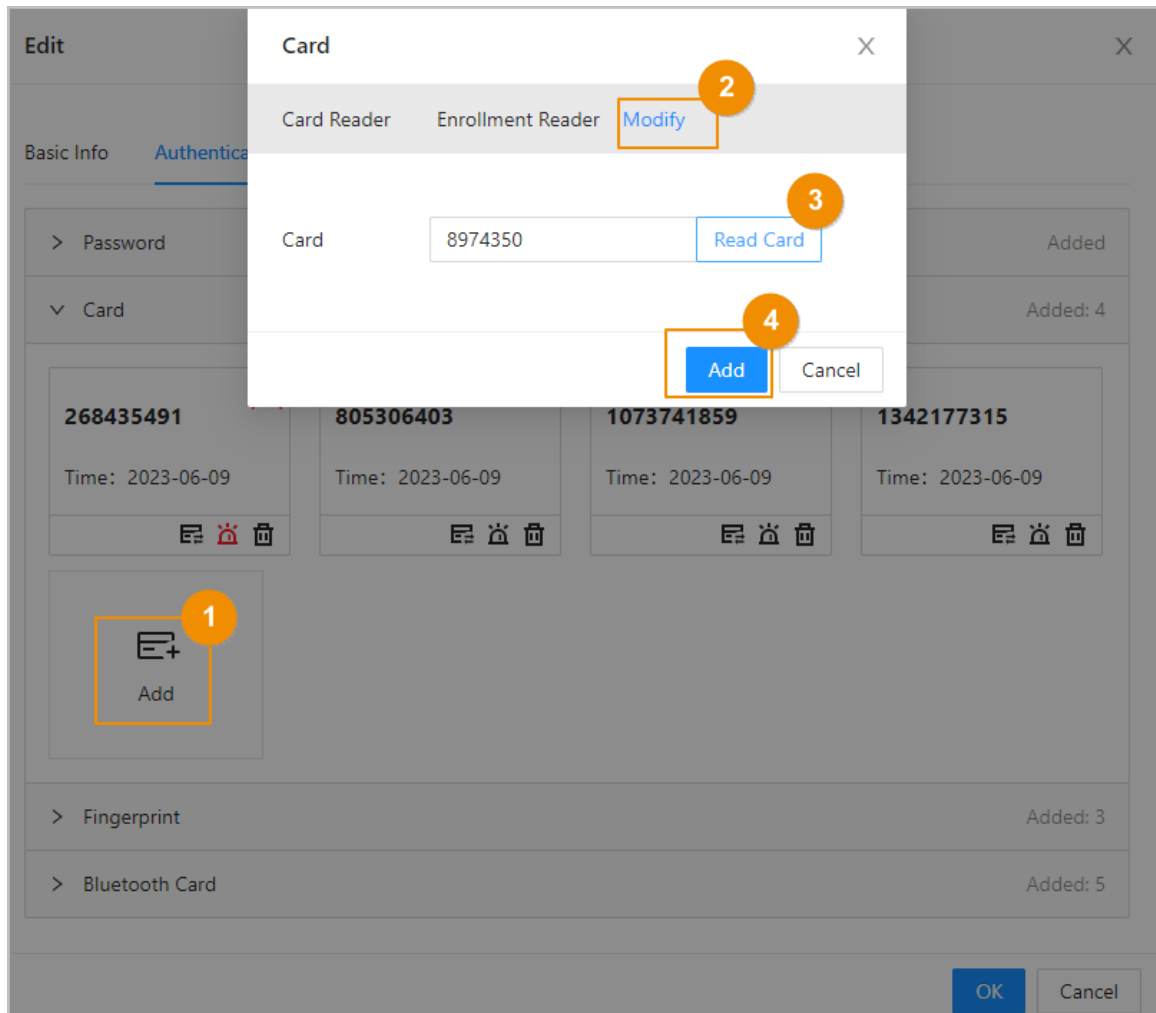

1. Click **Add**.
 2. Click **Modify**, and then select **Enrollment Reader**.
Make sure that the card enrollment reader is connected to your computer.
 3. Follow the on-screen instructions to download and install the plug-in.
 4. Click **Read Card**, and then swipe the cards on the enrollment reader.
A 60-second countdown is displayed to remind you to swipe the card, and the system will read the card number automatically. If the 60-second countdown expires, click **Read Card** again to start a new countdown.
 5. Click **Add**.
- Use the card reader to read the card number.

Figure 2-20 Use the card reader to read the card number

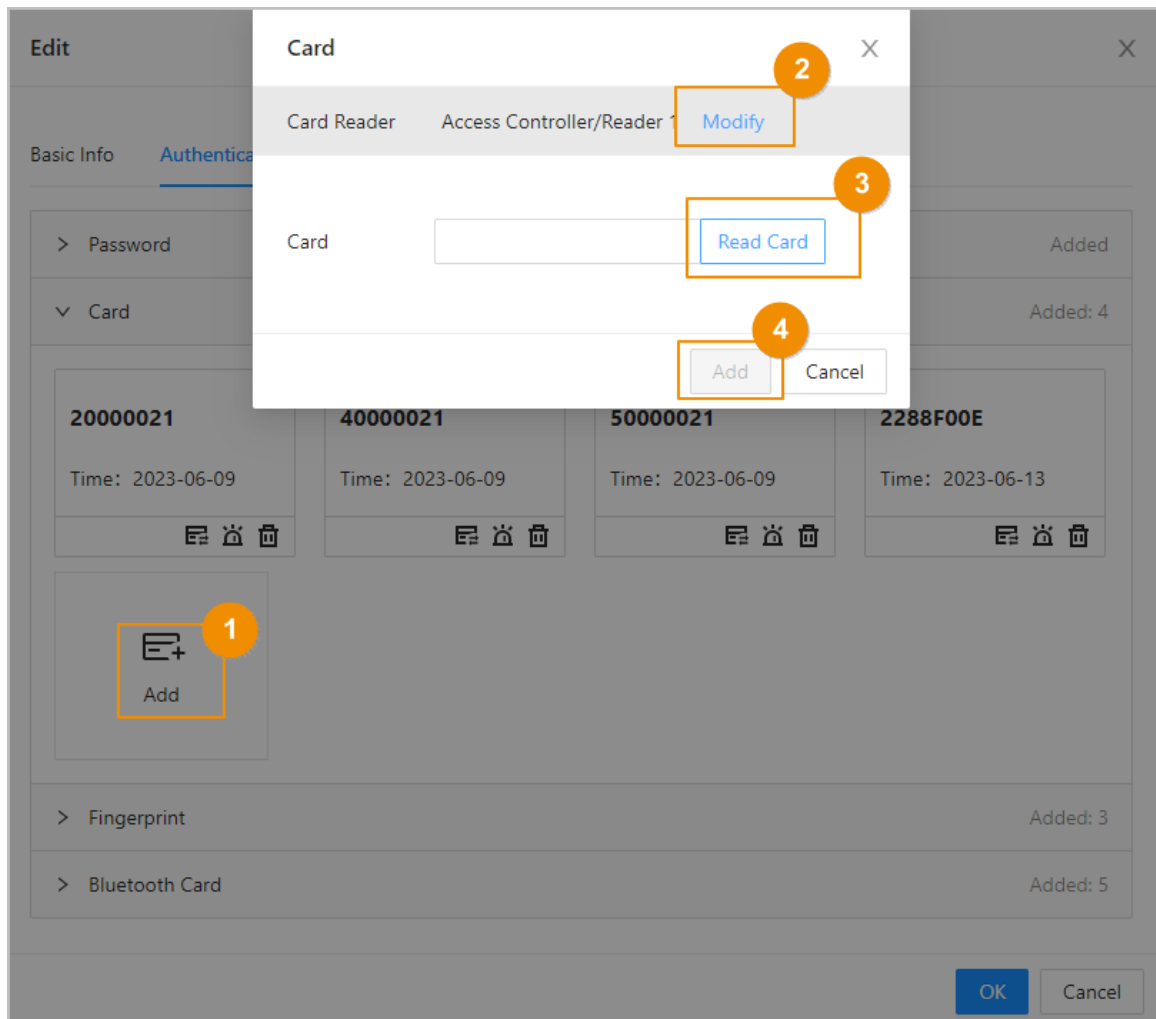

1. Click **Modify**, and then select a card reader.

Make sure that the card reader is connected to the Access Controller.

2. Click **Read Card**, and then swipe the cards on the card reader.

A 60-second countdown is displayed to remind you to swipe the card, and the system will read the card number automatically. If the 60-second countdown expires, click **Read Card** again to start a new countdown.

3. Click **Add**.

- Add cards in batches: Issue cards to users in batches.

1. Click **Batch Issue Cards**, and then select **Issue Cards to Selected Users** or **Issue Cards to All Users**.

2. You can manually enter the card number, or click **Modify** to issue cards through the enrollment reader or card reader.

Figure 2-21 Issue cards through the enrollment reader or card reader

Batch Issue Cards

Card

Bluetooth Card

Issue Cards

User ID	User Name	Card Number	Operation
00003	00003		⊖
00004	00004		⊖
10000021	zhangsan21	The number of cards for ...	⊖
10000022	zhangsan22	The number of cards for ...	⊖

User ID

00003

User Name

00003

User Type

VIP User

Email

Department

Default Company

Role

Default

Effective Time

2023-06-13 00:00:00~2037-12-31 23:59:59

Issue Card Config

Card Reader

Enrollment Reader

Modify

Card Number




Press the Enter key to enter.

Start Issuing Cards

OK

Cancel

Related Operations

-  : Change the number of the card.
-  : Set the card to duress card.
An alarm is triggered when people use the duress card to unlock the door.
-  : Delete the card.

2.2.7.4.3 Adding Fingerprints

Add fingerprints to users for them to use their fingerprints to unlock doors.

Procedure

Step 1 On the **Authentication** tab, click **Fingerprint**.

- Step 2 Connect a fingerprint scanner to the computer, and follow the on-screen instructions to register the fingerprint.
- Step 3 Click **Add**.

2.2.7.4.4 Adding Bluetooth Cards

Add Bluetooth cards to users for them to gain access through Bluetooth cards.

Prerequisites

- The Bluetooth unlock function has been turned on.
- The main controller has been added to DMSS. For details, see "2.2.21.4.3 Configuring Cloud Service".
- Users have been added to the Platform of the Access Controller. For details, see "2.2.7.3 Configuring Basic User Information".
- General users, such as company employees, have installed and signed up for DMSS with their email.




The email that users use to sign up for DMSS must be the same as the one you used to add them to the access controller.

Background Information

Refer to the flowchart for configuring Bluetooth unlock. Administrator and general users need to perform different operations to complete the process. General users, like company employees, only need to sign up and log in to DMSS with their email to unlock doors using Bluetooth cards that were issued to them.

Figure 2-22 Flowchart for configuring Bluetooth unlock

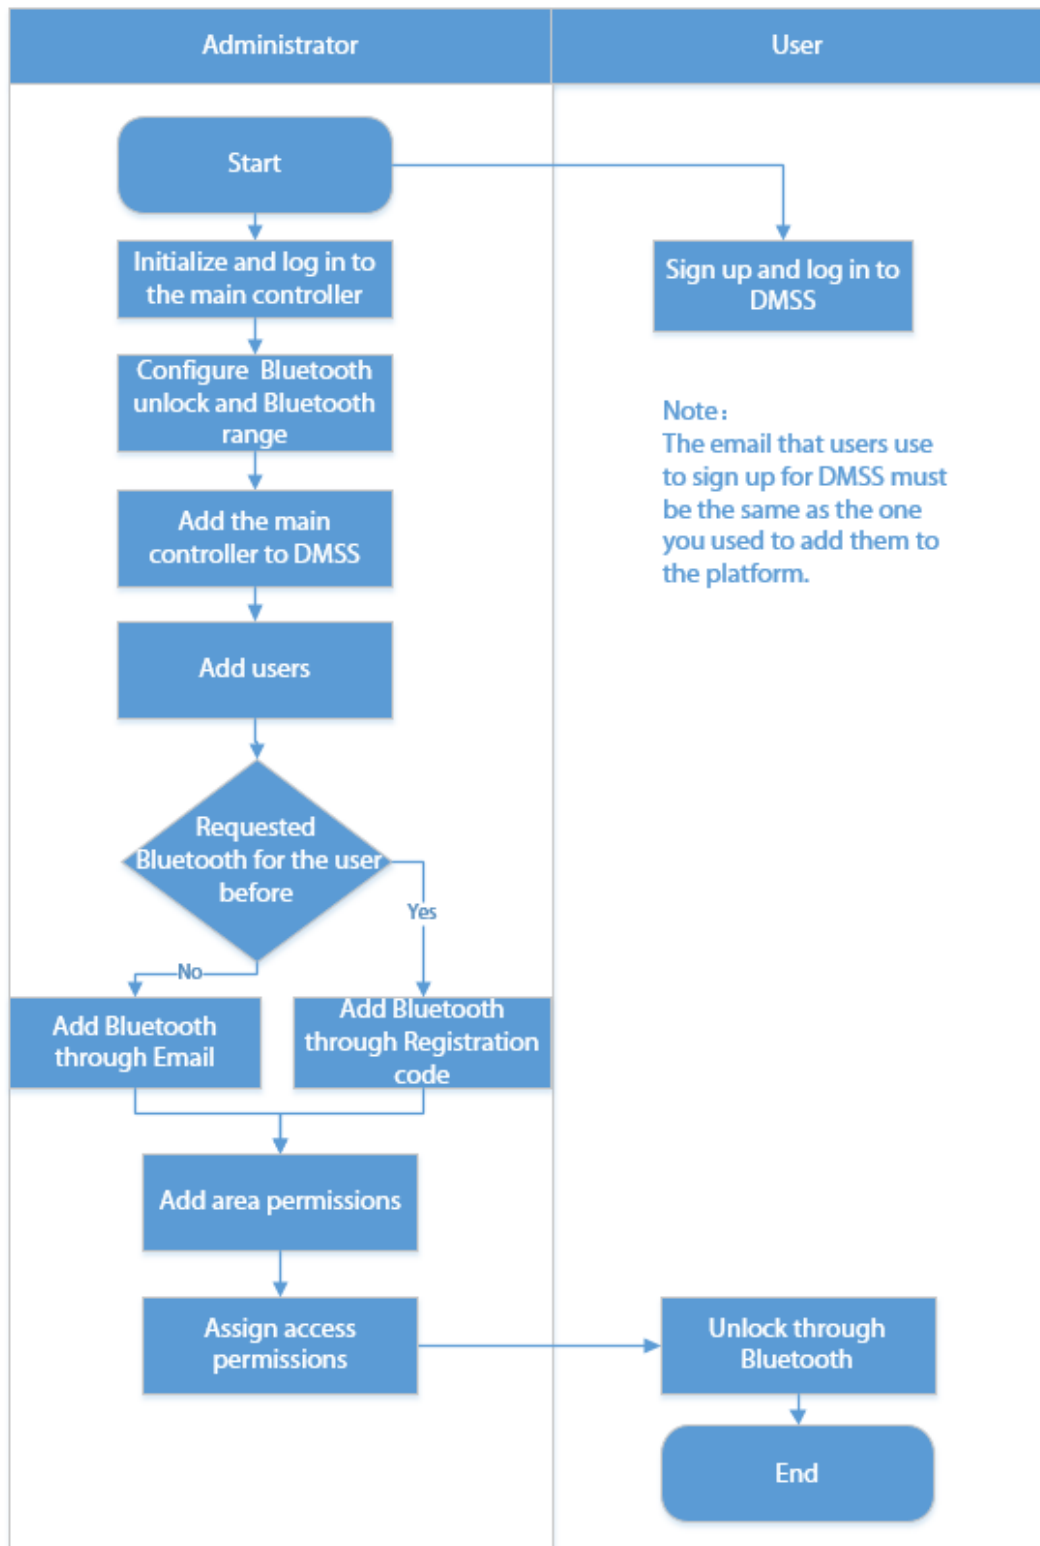

Procedure

- Step 1** On the **Authentication** tab, click **Bluetooth Card**.
3 methods are available to add Bluetooth cards.

- Request through email one by one: Click **Request through Email**.

A Bluetooth card is generated automatically. You can generate up to 5 cards for each user.

- Request through email in batches.

1. On the **User Management** page, click **Batch Issue Cards**.



Batch issue cards only supports requesting through Email.

- ◇ Issue Bluetooth cards to all the users on the list: Click **Issue Cards to All Users**.
- ◇ Issue Bluetooth cards to selected users: Select users, and then click **Issue Cards to Selected Users**.

2. Click **Bluetooth Card**.

3. Click **Request through Email**.



- ◇ Users who do not have an email or already have 5 Bluetooth cards will be displayed on the non-requestable list.
- ◇ Export users that lack emails: Click **Export Users that Lack Emails**, enter the emails in the correct format, and then click **Import**. They will be moved to the requestable list.

Figure 2-23 Batch issue cards

Batch Issue Cards

Card

Bluetooth Card

Bluetooth cards can only be generated in batches through emails.

Issue Cards

Requestable (992)

Non-Requestable (0)

Export Users that Lack Emails

Import

User ID	User Name	Email	Bluetooth Card No.	Status	Settings
6	6	1 [redacted]@ [redacted].c...	0		⊖
7	7	1 [redacted]5@ [redacted].c...	0		⊖
8	8	1 [redacted]5@ [redacted].c...	0		⊖
9	9	1 [redacted]7@ [redacted].c...	0		⊖
10	10	1 [redacted]3@ [redacted].c...	0		⊖
11	11	1 [redacted]3@ [redacted].c...	0		⊖

User ID

1

User Name

[redacted]123 [redacted]

User Type

General

Email

[redacted]@ [redacted].com

Group

BBB


Effective Time

2024-06-29 00:00:00-2037-12-31 23:59:59

Request through Email

- If you have requested Bluetooth cards for the user before, you can add the Bluetooth cards through registration code.

Figure 2-24 The flowchart for requesting through registration code

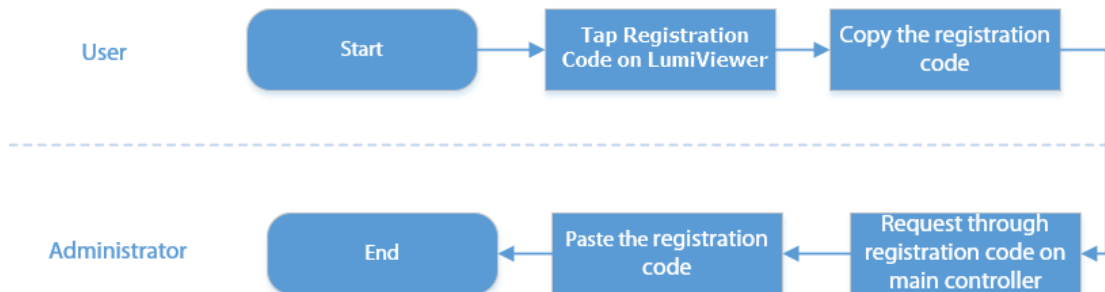


1. On LumiViewer, tap **Registration Code** of a Bluetooth card.

The registration code is automatically generated by LumiViewer.

2. Copy the registration code.
3. On the **Bluetooth Card** tab, click **Request through Registration Code**, paste the registration code, and then click **OK**.

Figure 2-25 Request through registration code

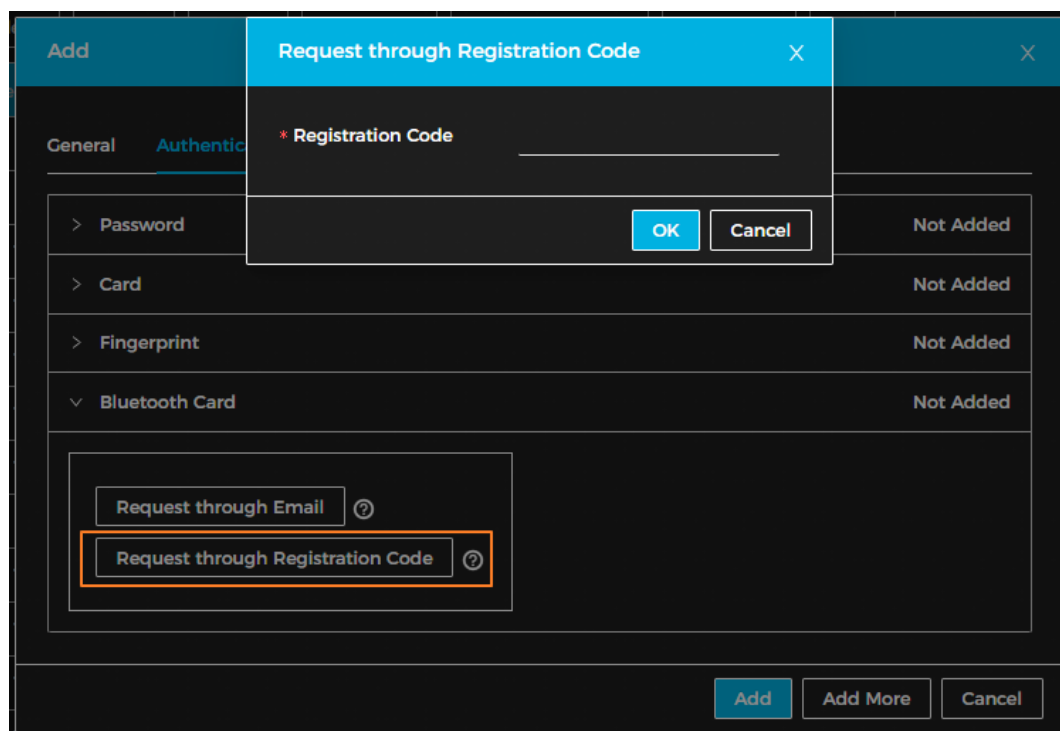

4. Click **OK**.

The Bluetooth card is added.

Step 2 Click **OK**.

Results

After users sign up and log in to DMSS with the Email address, they can open DMSS to unlock the door through Bluetooth cards. For details, see the user's manual of DMSS.


- **Auto Unlock:** The door automatically unlocks when you are in the defined Bluetooth range, which allows the Bluetooth card to transmit signals to the card reader.



In auto unlock mode, the Bluetooth card might continuously unlock the door when you are within the Bluetooth range for a long time until a failure occurs. Please turn off Bluetooth on the phone and then turn it on again.

- Shake to Unlock: The door unlocks when you shake your phone to allow the Bluetooth card to transmit signals to the card reader.

Figure 2-26 Unlock the door through Bluetooth cards

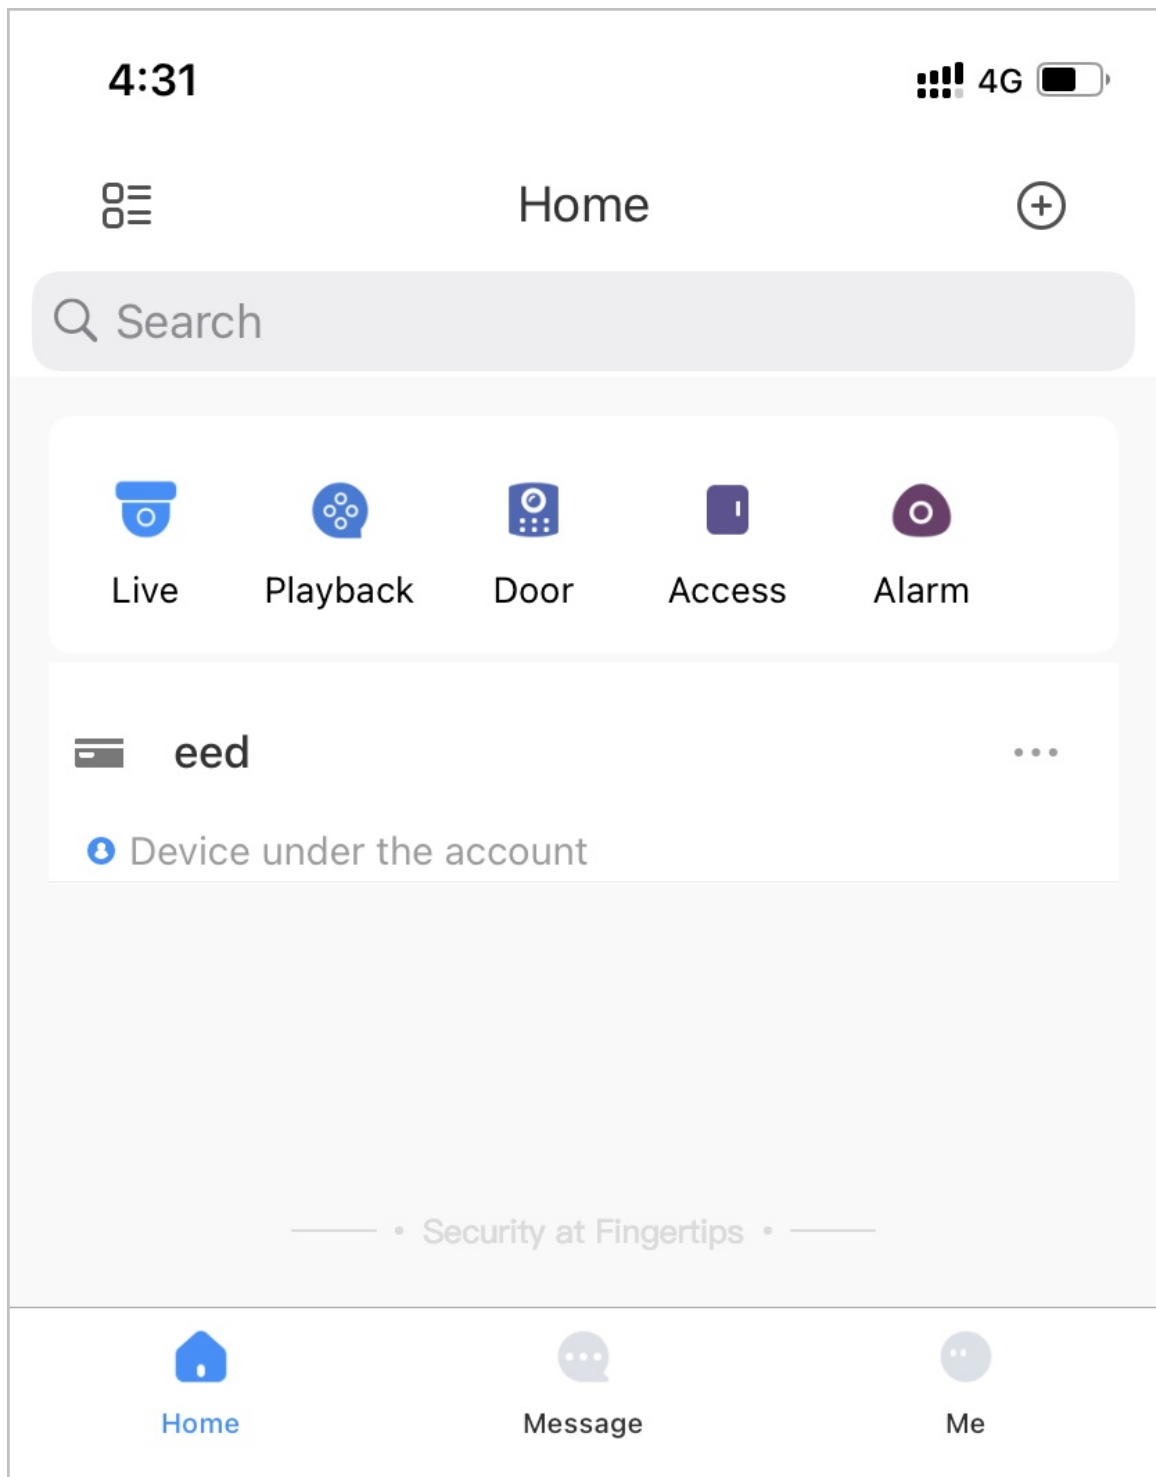

Related Operations

- Users can manage Bluetooth cards on DMSS.
 - ◇ Move to the Top: If multiple Bluetooth cards have been added, you can move cards to the top that are currently in use.
 - ◇ Rename: Rename the Bluetooth card.
 - ◇ Delete: Delete the Bluetooth card.
- Export users that lack emails: Click **Export**, enter the emails in the correct format and then click Import. They will be moved to the requestable list.
- View the request records: On the **Person Management** page, click **More** > **Bluetooth Card Records** to view the request status.

Figure 2-27 Request status

Bluetooth Card Records				
No.	Time	Status	Operation	
1	2023-03-09 10:26:31	Successful: 0, failed: 1.	View Details	Request Again
2	2023-03-09 10:25:59	Successful: 0, failed: 1.	View Details	Request Again
3	2023-03-09 10:25:49	Successful: 0, failed: 1.	View Details	Request Again

- ◇ View Details: View the details of the request, including user information, reasons for failed requests and more. You can also request again for failed users.
- ◇ Request Again: Request again for failed users.

2.2.8 Adding Weekly Plans

The weekly plan is used to set the unlock schedule for the week. The platform offers a default template with a full daytime schedule. You can also create your own templates.

Procedure


- Step 1 On the home page, select **Access Control Config** > **Weekly Plan**, and then click **+**.



- The default full-day time template cannot be modified.
- You can create up to 128 weekly plans.

- Step 2 Enter the name of the time template.

Figure 2-28 Create the weekly plan

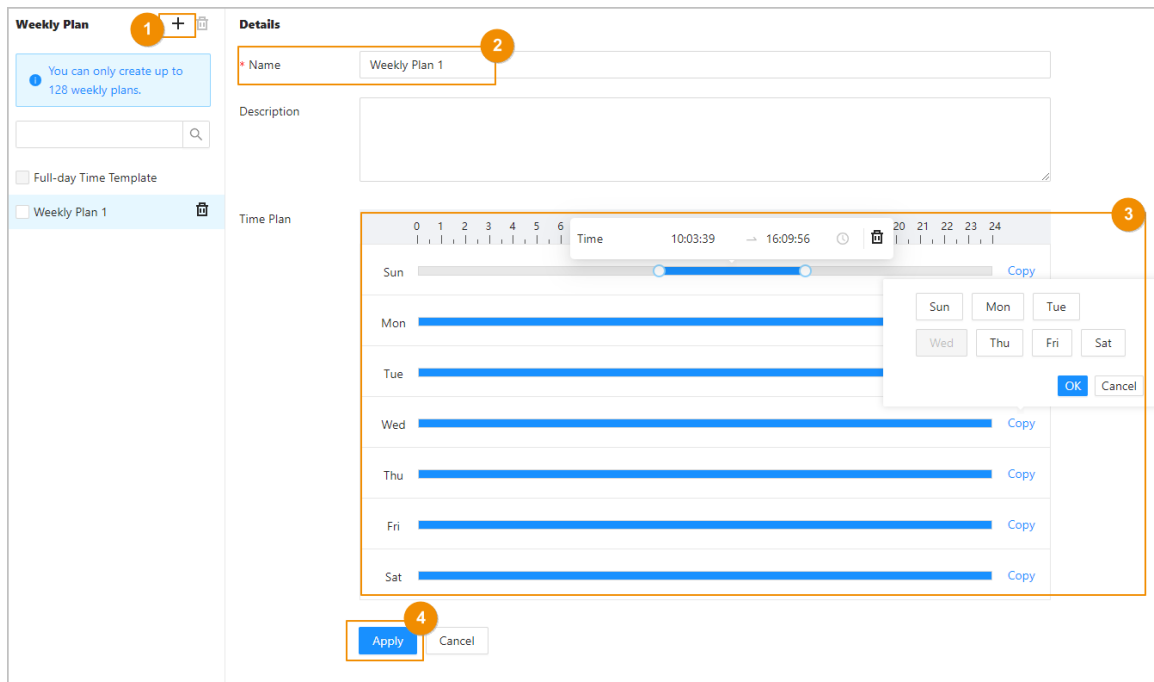

Step 3 Drag the slider to adjust the time period for each day.

You can also click **Copy** to apply the configured time period to other days.



You can only configure up to 4 time sections for each day.

Step 4 Click **Apply**.

2.2.9 Adding Holiday Plans (Optional)

The holiday plan is used to set the unlock schedule for holidays.

Procedure

Step 1 On the home page, select **Access Control Config > Holiday Plan**, and then click **+**.



You can create up to 128 holiday plans.

Step 2 Enter the name of the holiday plan.

Step 3 Drag the slider to adjust the time period for each day.



You can only configure up to 4 time sections for each day.

Step 4 Click **Add** to add holidays to the holiday plan, and then click **OK**.

- **Public:** The holiday will be shared with all your holiday plans.
- **Custom:** The holiday is only used on the current holiday plan.

Figure 2-29 Add holidays

Edit

* Name: National day

* Start Time: 2023-10-01

Duration: 8 Days

Type: ☒ Public ☐ Custom

OK Cancel

Step 5 Select holidays.

Step 6 Click **Apply**.

Figure 2-30 Create holiday plan

Holiday Plan

You can only create up to 128 holiday plans.

Holiday Plan 1

Holiday Plan 2

Details

Name: Holiday Plan 1

Description:

Time Plan:

Holiday List:

Add

Name	Type	Operation
National day	Public	<input type="checkbox"/>
Spring festival	Public	<input checked="" type="checkbox"/>

Selected Holiday Lists:

Clear

Selected 1 items.

Name	Operation
Spring festival	

Apply Cancel

2.2.10 Adding Areas

An area is a collection of door access permissions. Create an area, and then link users to the area so that they can gain access permissions set for the area.


Procedure

Step 1 Click **Access Control Config > Area Settings**.

Step 2 Click **+** to add areas.

You can add up to 40 area permissions.

Figure 2-31 Add areas

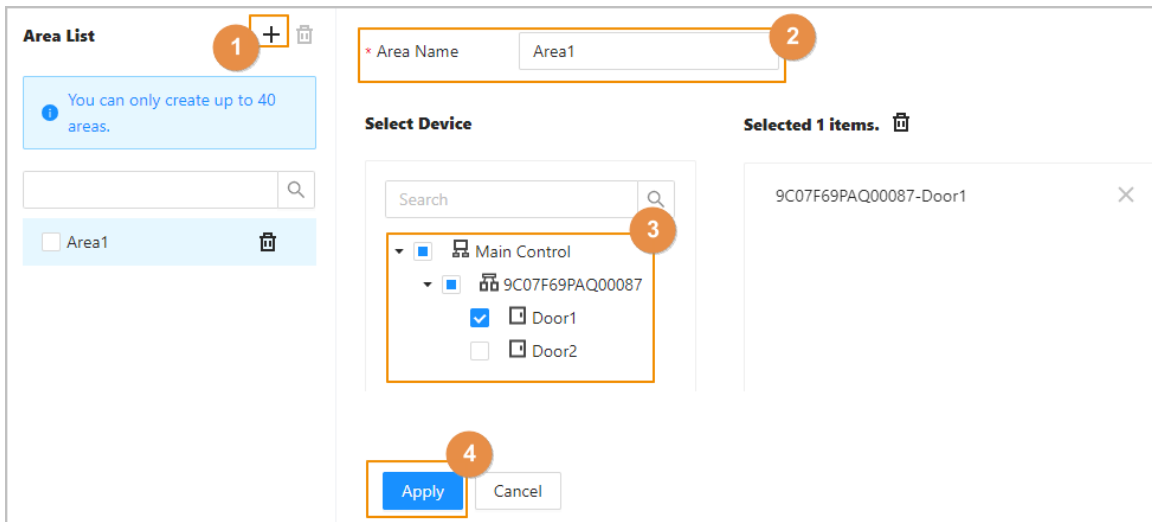

Step 3 Enter the name of the area.

Step 4 Select doors.

Step 5 Click **Apply**.

2.2.11 Adding Permission Rules


By creating permissions rules, you can assign access permissions to users by linking them to the areas. This will allow authorized personnel to gain access to secure areas.

Procedure

Step 1 On the home page, select **Access Control Config > Permission Settings**.

Step 2 Click **+** to add a permission rule.

Figure 2-32 Assign permissions in batches

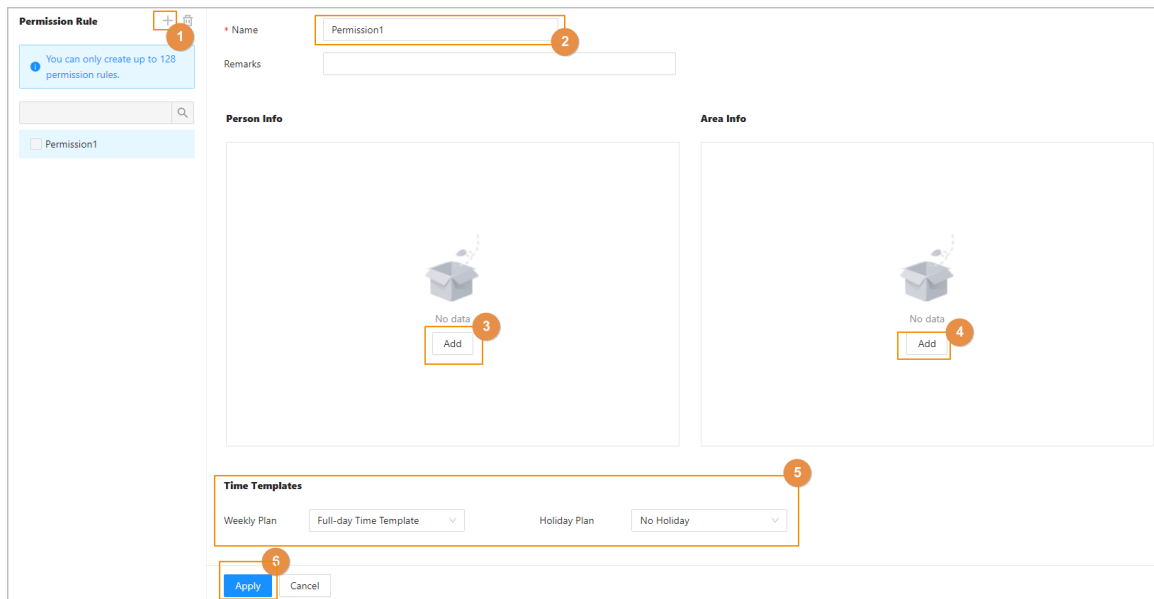

Step 3 Enter the name of the permission rule.

Step 4 In the **Person Info** area, click **Add** to select personnel, and then click **OK**.


You can select personnel on the department, role or individual users.

- Dept: All personnel in the department will be assigned with access permissions.
- Role: All personnel with these roles will be assigned with access permissions.
- User: Only selected users will be assigned with access permissions.



When you want to assign permission to a new person or change access permissions for an existing person, you can simply add the user in an existing department or link them with an existing role, they will be automatically assigned access permissions set for the department or role.


Figure 2-33 Add personnel

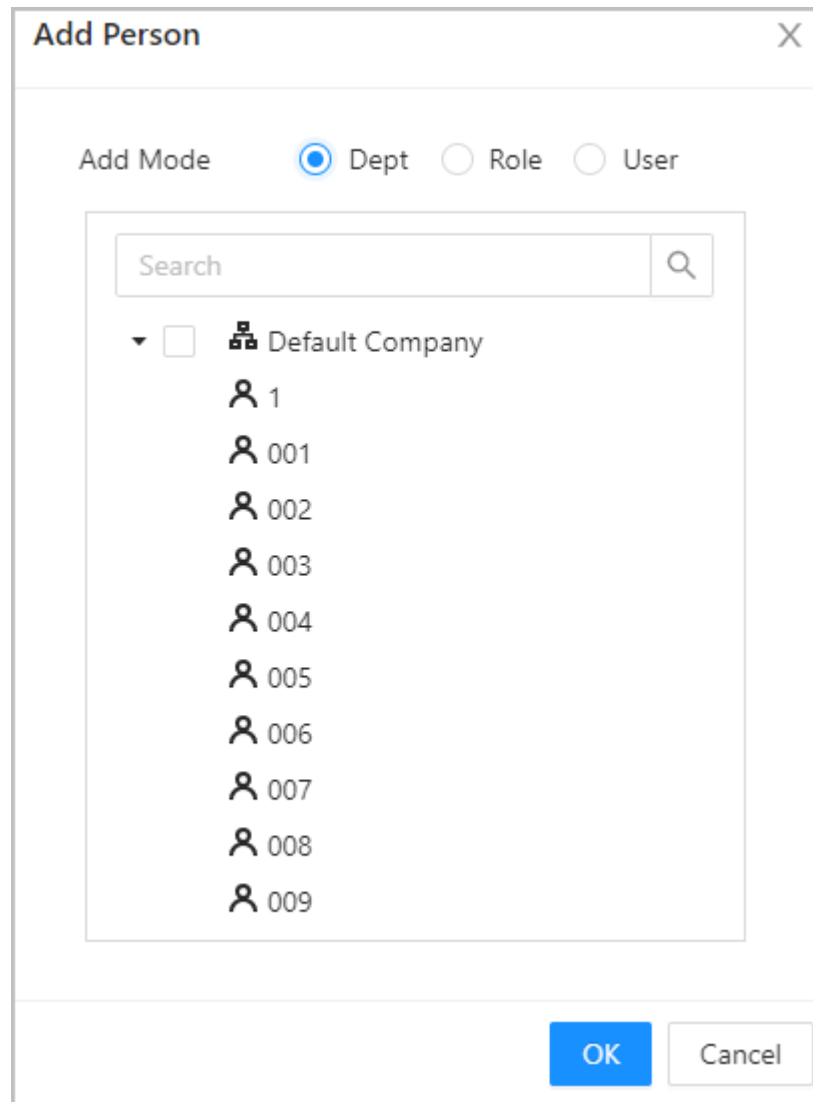


You can click **+** to create new permission groups. For details on creating permission groups, see "2.2.10 Adding Areas".

Step 5 In the **Area Info**, click **Add** to select an area, and then click **OK**.

Figure 2-34 Add area

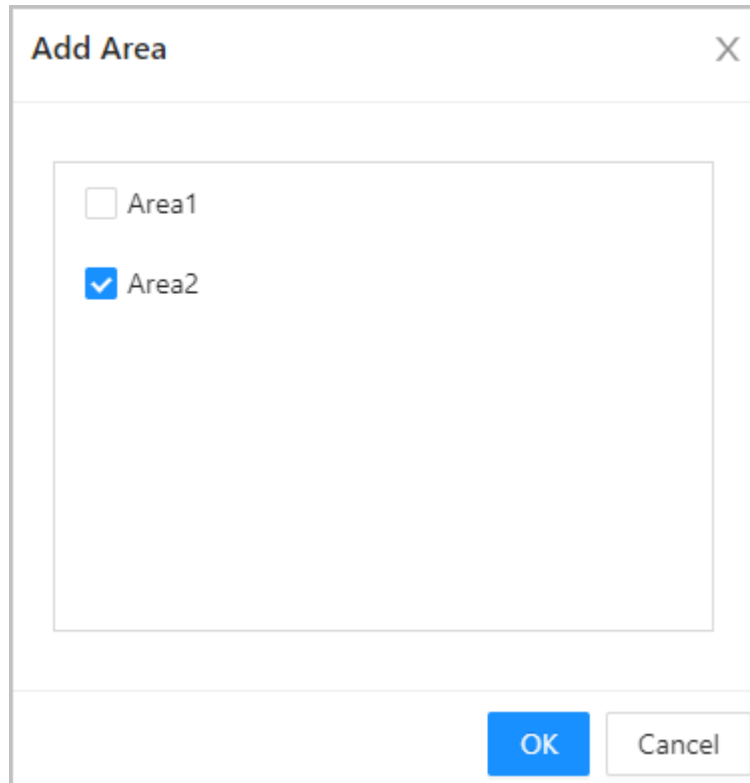

The 'Add Area' dialog box contains a list of areas. 'Area1' is unchecked, and 'Area2' is checked. At the bottom right, there are 'OK' and 'Cancel' buttons.

Step 6 In the **Time Templates** area, select the weekly plan and the holiday plan.

Step 7 Click **Apply**.

Related Operations

2.2.12 Viewing Authorization Progress

After you assign access permissions to users, you can view the authorization process.



Procedure

Step 1 On the home page, select **Access Control Config** > **Authorization Progress**.


Step 2 View the authorization progress.

- **Sync SubControl Person** : Sync personnel on the main controller to the sub-controller.
- **Sync Local Person** : Sync personnel on the management platform of the main controller to its server.
- **Sync Local Time** : Sync the time templates in the area permissions to the sub-controller.

Figure 2-35 Authorization progress

Area Permission	Device Name	Type	Progress	Results	Time	Operation
	186	Sync SubControl Person	<div><div></div></div>	Succeed: 1, Failed: 0	2022-08-12 20:01:59	
	186	Sync SubControl Person	<div><div></div></div>	Succeed: 0, Failed: 1	2022-08-12 20:01:23	 
	186	Sync Local Person	<div><div></div></div>	Succeed: 1, Failed: 0	2022-08-12 20:01:23	

Step 3 (Optional) If authorization failed, click  to try again.

You can click  to view details on the failed authorization task.

2.2.13 Configuring Access Control (Optional)


2.2.13.1 Configuring Basic Parameters

Procedure

Step 1 Select **Access Control Config > Door Parameters**.

Step 2 In **Basic Settings**, configure basic parameters for the access control.

Figure 2-36 Basic parameters

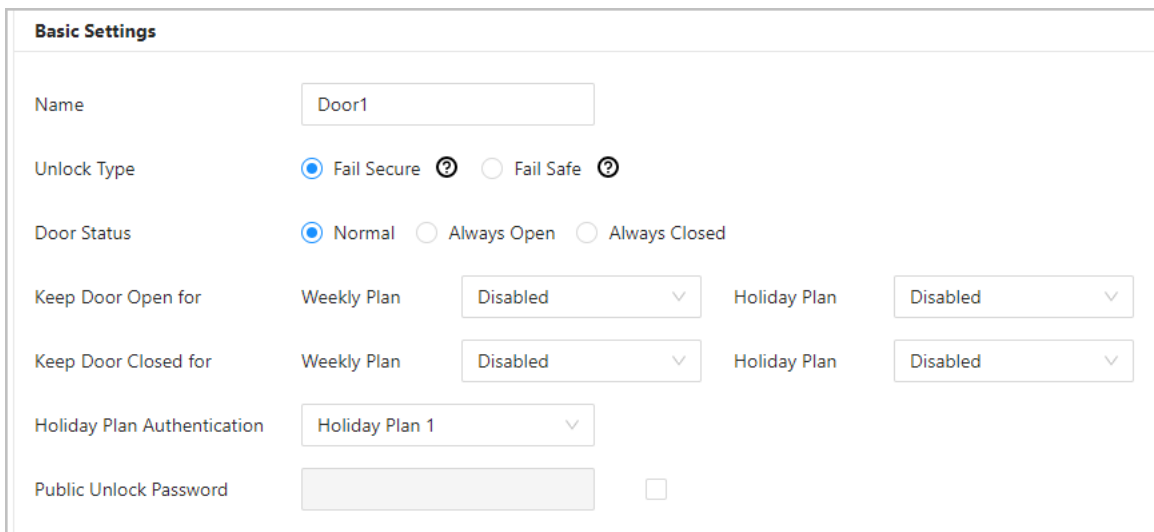

The screenshot shows the 'Basic Settings' configuration page. It includes the following fields and options:

- Name:** A text input field containing 'Door1'.
- Unlock Type:** Two radio button options: 'Fail Secure' (selected) and 'Fail Safe'.
- Door Status:** Three radio button options: 'Normal' (selected), 'Always Open', and 'Always Closed'.
- Keep Door Open for:** Two dropdown menus, both set to 'Disabled'. The first is labeled 'Weekly Plan' and the second 'Holiday Plan'.
- Keep Door Closed for:** Two dropdown menus, both set to 'Disabled'. The first is labeled 'Weekly Plan' and the second 'Holiday Plan'.
- Holiday Plan Authentication:** A dropdown menu set to 'Holiday Plan 1'.
- Public Unlock Password:** A text input field and a checkbox, both currently empty.

Table 2-8 Basic parameters description

Parameter	Description
Name	The name of the door.
Unlock Type	<ul style="list-style-type: none"> ● If you selected 12 V to supply power for the lock through the controller during the log-in wizard, you can set fail secure or fail safe. <ul style="list-style-type: none"> ◇ Fail secure: When the power is interrupted or fails, the door stays locked. ◇ Fail safe: When the power is interrupted or fails, the door automatically unlocks to allow people to leave. ● If you selected Relay to supply power for the lock through the relay during the login wizard, you can set relay open or relay close. <ul style="list-style-type: none"> ◇ Relay open=locked: Set the lock to remain locked when the relay is open. ◇ Relay open=unlocked: Set the lock to unlock when the relay is open.

Parameter	Description
Door Status	<p>Set the door status.</p> <ul style="list-style-type: none"> ● Normal : The door will be unlocked and locked according to your settings. ● Always Open : The door remains unlocked all the time. ● Always Closed : The door remains locked all the time.
Keep Door Open For	The door remains open during the defined week plan or holiday plan.
Keep Door Closed For	The door remains closed during the defined week plan or holiday plan.
Holiday Plan Authentication	<p>When you select the weekly plan for Keep Door Closed For, configure this parameter for authorized access during the holiday period in the weekly plan.</p> <p>For example, if the Weekly Plan for the Keep Door Closed For is set to Monday to Friday from 15:00 to 18:00, the door will be in a normally closed state during this time. At this condition, add a holiday plan, which is January 1, 2025, from 15:00 to 18:00. Select the added holiday plan for Holiday Plan Authentication. After applying this, the door can open during 15:00 to 18:00 on January 1, 2025 after successful verification.</p> <p>The authority verification priority for time periods is as follows: One-click to normally open > one-click to normally closed > keep door open for holiday plan > keep door closed for holiday plan > holiday plan authentication > keep door open for weekly plan > keep door closed for weekly plan.</p>
Normally Closed Period	When you select Normal , you can select a time template from the drop-down list. The door remains open or closed during the defined time.
Public Unlock Password	Turn on this function, and then enter a password, and then you can unlock the door by only entering the public password.

2.2.13.2 Configuring Unlock Methods

You can use multiple unlock methods to unlock the door, such as Bluetooth card, fingerprint, card, and password unlock. You can also combine them to create your own personal unlock method.

Procedure

Step 1 Select **Access Control Config > Door Parameters**.

Step 2 In **Unlock Settings**, select an unlock mode.

- Combination unlock
 1. Select **Combination Unlock** from the **Unlock Mode** list.
 2. Select **Or** or **And**.
 - ◇ Or: Use one of the selected unlocking methods to open the door.
 - ◇ And: Use all the selected unlocking methods to open the door.



Bluetooth card cannot be selected when you set the combination method to **And**.

3. Select unlock methods, and then configure other parameters.

Figure 2-37 Unlock settings

Unlock Settings

Unlock Mode

Combination Unlock

Combination Method

☒ Or
☐ And

Unlock Method (Multi-select)

☒ Card
☒ Fingerprint
☒ Password
☒ Bluetooth Card

Bluetooth Mode

☐ Short-range
☒ Mid-range
☐ Long-range


Door Unlocked Duration

3.0
s (0.2-600)

Unlock Timeout

60
s (1-9999)

Table 2-9 Unlock settings description

Parameter	Description
Unlock Method (Multi-select)	Supports unlocking through card, fingerprint, password or Bluetooth card. The Bluetooth card function is turned off by default.
Bluetooth Mode	<p>The Bluetooth card must be a certain distance away from the access control device to exchange data and unlock the door. Following are the ranges that are most suitable for it.</p> <ul style="list-style-type: none"> • Short-range: The Bluetooth unlock range is less than 0.2 m. • Mid-range: The Bluetooth unlock range is less than 2 m. • Long-range: The Bluetooth unlock range is less than 10 m. <p></p> <p>The Bluetooth unlock range might differ depending on models of your phone and the environment.</p>
Door Unlock Duration	After a person is granted access, the door will remain unlocked for a defined time for them to pass through. It ranges from 0.2 s to 600 seconds.
Unlock Timeout	A timeout alarm is triggered when the door remains unlocked for longer than the defined value.

- Unlock by period

1. In the **Unlock Mode** list, select **Unlock by Period**.
2. Drag the slider to adjust time period for each day.




You can also click **Copy** to apply the configured time period to other days.

3. Select an unlock method for the time period, and then configure other parameters.



You can only configure up to 4 time sections for each day.

Figure 2-38 Unlock by period

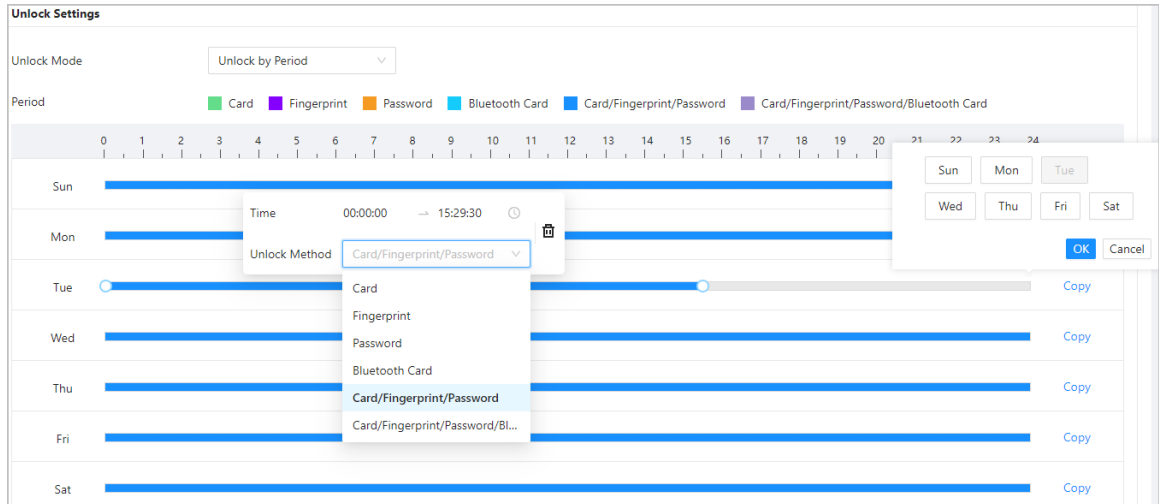

Step 3 Click **Apply**.

2.2.13.3 Configuring Alarms

An alarm will be triggered when an abnormal access event occurs.

Procedure

Step 1 Select **Access Control Config > Door Parameters > Alarm Settings**.

Step 2 Configure alarm parameters.

Figure 2-39 Alarm

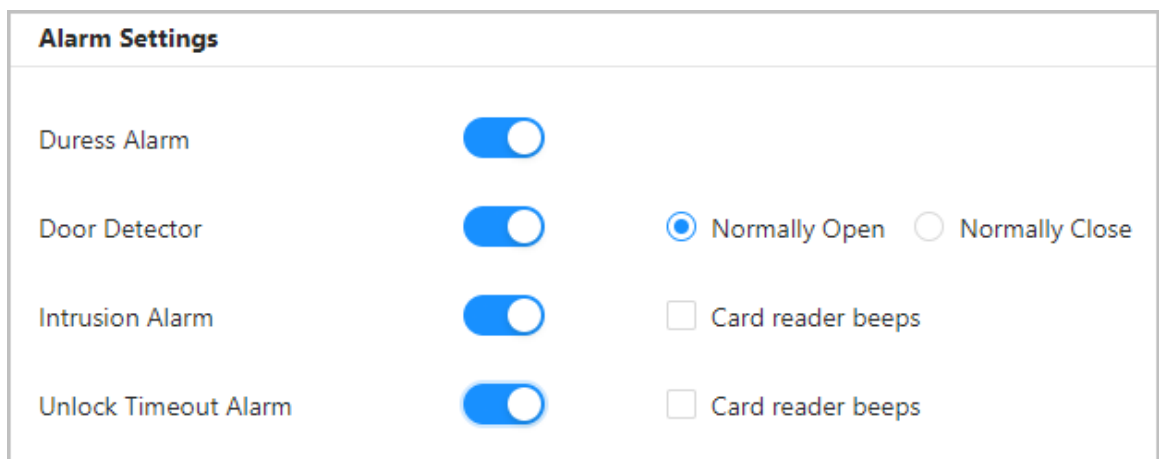


Table 2-10 Description of alarm parameters

Parameter	Description
Duress Alarm	An alarm will be triggered when a duress card, duress password or duress fingerprint is used to unlock the door.
Door Detector	Select the type of door detector.

Parameter	Description
Intrusion Alarm	<ul style="list-style-type: none"> When door detector is enabled, an intrusion alarm will be triggered if the door is opened abnormally. A timeout alarm will be triggered if the door remains unlocked longer than the defined unlock time. When Card reader beeps is enabled, the card reader beeps when the intrusion alarm or timeout alarm is triggered.
Unlock Timeout Alarm	

Step 3 Click **Apply**.

2.2.14 Configuring the Password Unlock

When the PIN Code Authentication is enabled, people can unlock the door by simply entering the password.

Background Information



- If Pin code authentication is not enabled, you can unlock the door by entering the unlock password in the format of **user ID#password#** . For example, if the user ID is 123, and the password you set is 12345, and then you must enter **123#12345#** to unlock the door.
- If Pin code authentication is enabled, you can unlock the door by entering the unlock password in the format of **password#** . For example, if the user ID is 123, and the password you set is 12345, and then you must enter **12345#** to unlock the door.

Procedure

Step 1 On the home page, select **Access Control Config > Unlock Method Config**.

Step 2 Turn on **PIN Code Authentication** , and then click **Apply**.



There are some safety risks in enabling PIN code authentication. When it is turned on, the user types and roles become ineffective, and the following situations occur.

- First-card holders and users in multi-person unlock groups need to verify their identities through the defined unlock methods, except password. If they verify through password, the first-card unlock or multi-person unlock function will become ineffective.
- Users need to verify their through defined unlock methods except password. If they gain access through password, the anti-passback function will become ineffective.
- Patrol users and block-listed users can simply enter their password to unlock the door.
- Frozen and expired accounts can still unlock doors by simply entering their password.
- When the password unlock method is disabled at the same time, all types of users cannot unlock the door using their password.

2.2.15 Configuring Global Alarm linkages (Optional)

You can configure global alarm linkages across different Access Controllers.

Procedure

Step 1 Select **Access Control Config > Global Alarm Linkage**.




- When you have configured both global alarm linkages and local alarm linkages, and if the global alarm linkages conflict with the local alarm linkages, the last alarm linkages you have configured will take effective.
- When you have configured alarm linkages for sub controllers through the main controller, if the main controller has been restored to the factory defaults, we recommended you restore the sub controller to factory defaults at the same time.

Step 2 Configure the alarm output.

1. Select an alarm input from the alarm input channel list, and then click **Link Alarm Output**.
2. Click **Add**, select an alarm output channel, and then click **OK**.

Figure 2-40 Alarm output

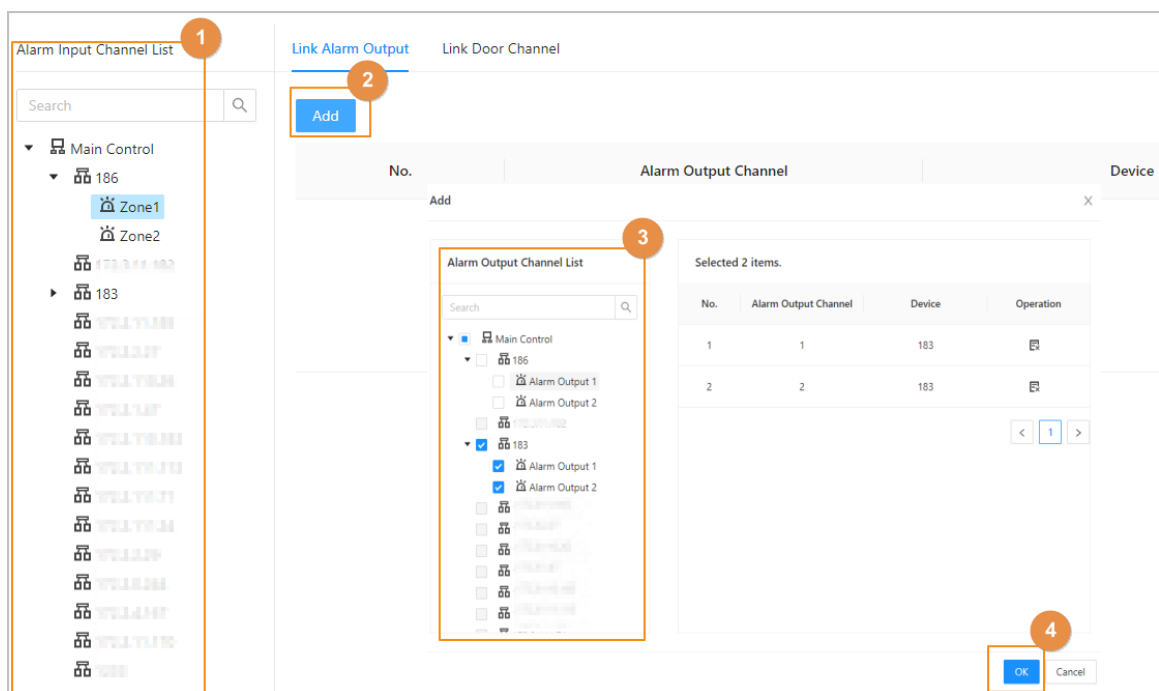


3. Turn on the alarm output function and then enter the alarm duration.
4. Click **Apply**.

Step 3 Configure the door linkage.


1. Select an alarm input from the channel list, and then click **Add**.
2. Select the linkage door, select the door status, and then click **OK**.
 - Always Closed: The door automatically locks when an alarm is triggered.
 - Always Open: The door automatically unlocks when an alarm is triggered.

Figure 2-41 Door linkage (1)

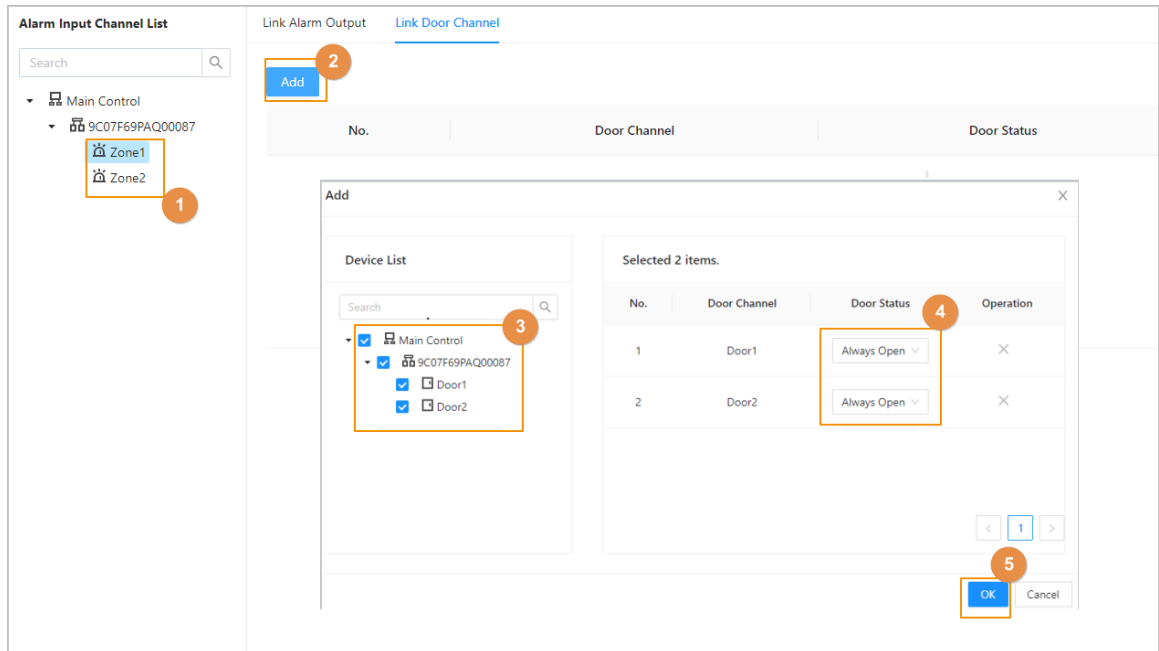

3. Click **Enable** to turn on the door linkage function.

Figure 2-42 Door linkage (2)

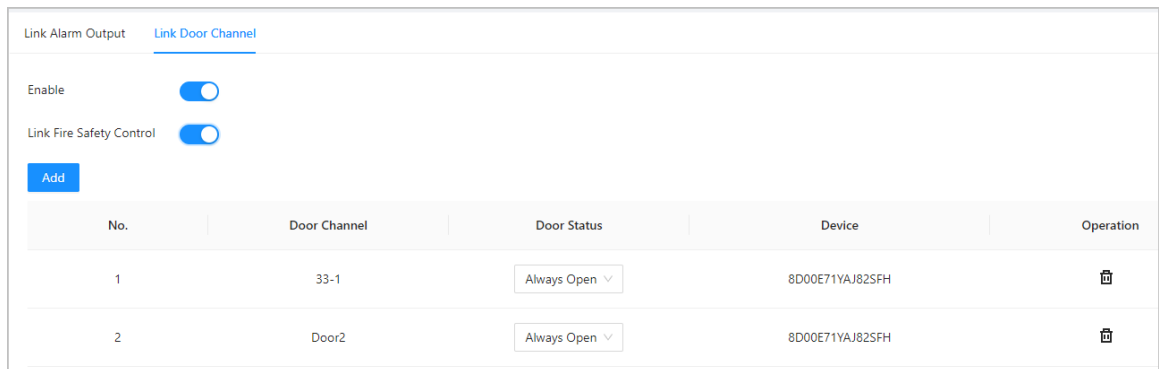

If you turn on link fire safety control, all door linkages will automatically change to the **Always Open** status, and all the doors will open when the fire alarm is triggered.

4. Click **Apply**.

You can click **Copy to** to apply the pre-configured alarm linkages to other alarm input channels.

2.2.16 Configuring First Card Unlock


Define certain people as the first-card holders, other users can verify their identities to unlock the door only after the first-card holders verify their identities first.

Procedure

Step 1 Select **Access Control Config > First-card Unlock**.

Step 2 In the device list, click **+**, and then select the door.

Figure 2-43 Assign first-card permission to users

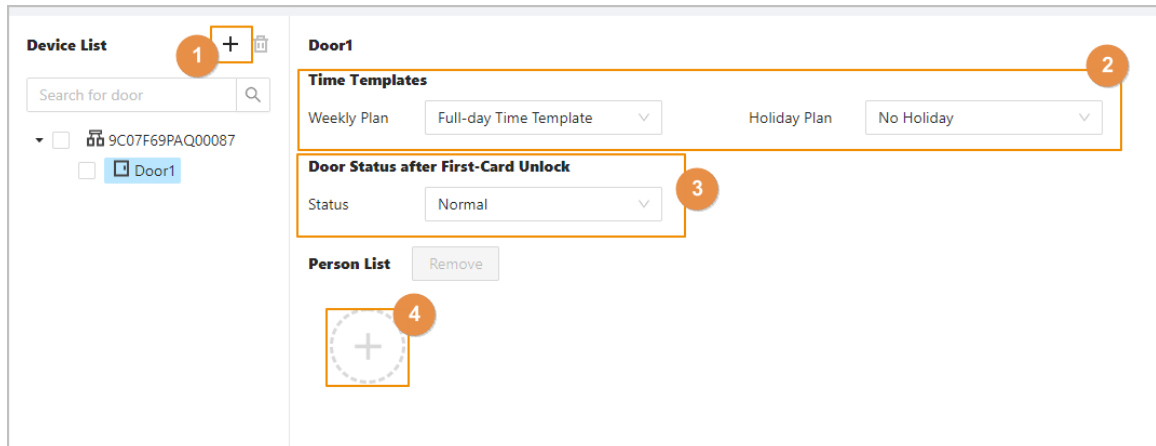


Step 3 Select the weekly plan and the holiday plan.

First-card is valid only during the defined time.

Step 4 Select the door status.

- Normal: Non-first cards users must verify their identities to unlock the door after first-card users grant access on the Access Controller.
- Always Open: The door stays open after first-card users grant access on the Access Controller.

Step 5 Click  to add first-card users, and then click **OK**.

You can select users from department or roles.

Figure 2-44 Add first-card users

Add

Add Mode
☒ Dept
☐ Role

Select Person

Search

▼ ☒ Default Company

☒ 001
☒ 002
☐ 003
☐ 004
☐ 005
☐ 006
☐ 007
☐ 008
☐ 009
☐ 010
☐ 1

>

Selected 2 items.

No.	User Name	Operation
1	Default Company-001	×
2	Default Company-002	×

OK

Cancel

2.2.17 Configuring Multi-Person Unlock

Users must verify their identities on the Access Controller in an established sequence before the door unlocks.

Background Information



We do not recommend you add first-card users into groups of multi-person unlock.

Procedure


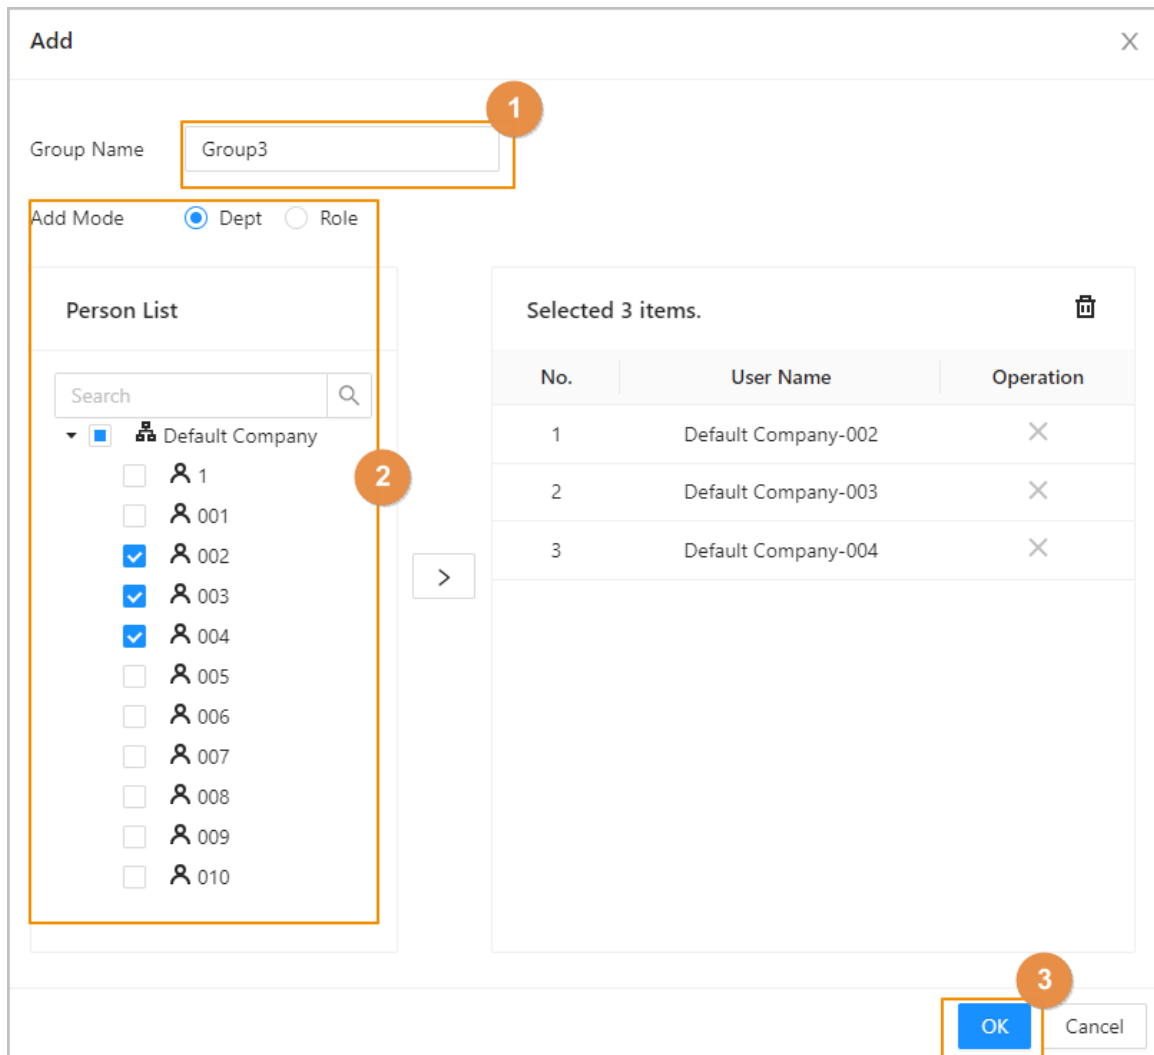
- Step 1** Select **Access Control Config > Multi-person Unlock**.
- Step 2** Click  to add doors to the device list.
- Step 3** Click **Person Group Management**, and then click **Add** to add groups of multi-person unlock.
 1. Create a name for the group.
 2. Select users from departments or roles.
 3. Click **OK**.

Figure 2-45 Add groups



Step 4 Select a door, and then click **Add Person Groups**.

Step 5 Select groups, and then click **OK**.



You can add up to 4 groups for each door. Each group can have up to 50 users.

Step 6 Configure the parameters of multi-person unlock.

1. Enter the valid No.

The valid No. indicates the number of people in each group who need to verify their identities on the Access Controller before the door unlocks. For example, if the valid No. is set to 2 for a group, any 2 people from the group need to verify their identities to unlock the door.



The valid number ranges from 1 to 5 in each group.


2. Select the unlock method.

Users in the group must verify their identities through the defined unlock methods.

3. (Optional) Click **Up** or **Down** to change the sequence of groups.

If more than one groups are added, users must verify their identities according the defined sequence of groups.

Figure 2-46 Configure multi-person unlock

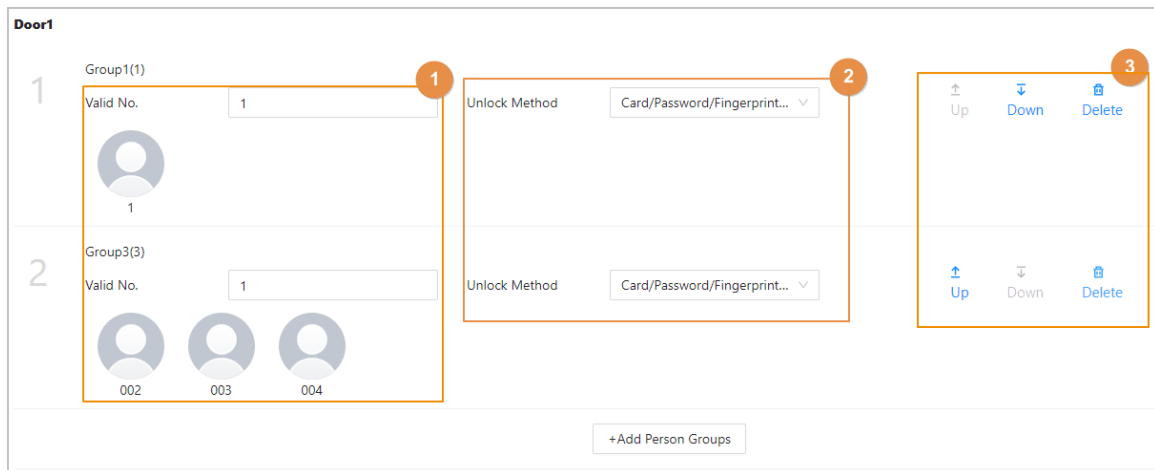

Step 7 Click **Apply**.

2.2.18 Configuring Anti-Passback

Users need to verify their identities both for entry and exit; otherwise an anti-passback alarm will be triggered. It prevents a card holder from passing an access card back to another person so they gain entry. When anti-passback is enabled, the card holder must leave the secure area before system will grant another entry.

Background Information

- If a person enters after being authorized and exits without being authorized, an alarm will be triggered when they attempt to enter again, and access is denied at the same time.
- If a person without being authorized and exits after being authorized, an alarm will be triggered when they attempt to enter again, and access is denied at the same time.




- When you have configured anti-passback for sub controllers through the main controller, and you plan on restoring the main controller to its factory defaults, we recommend you also restore the sub controller to its factory defaults at the same time.
- If the anti-passback rule is used when the network is not stable, the door might open after an identity is verified, but a time-out alarm might be triggered on the card reader. Please make sure your network is stable.

Procedure

- Step 1 Select **Access Control Config > Global Anti-passback**.
- Step 2 Turn on the **Reset Anti-Passback** function, and then select a reset time.
Specify a time when the anti-passback status of all personnel will be reset.
- Step 3 Click **Anti-passback Group List**, and then click **+** to add an anti-passback group.

Figure 2-47 Configure anti-passback

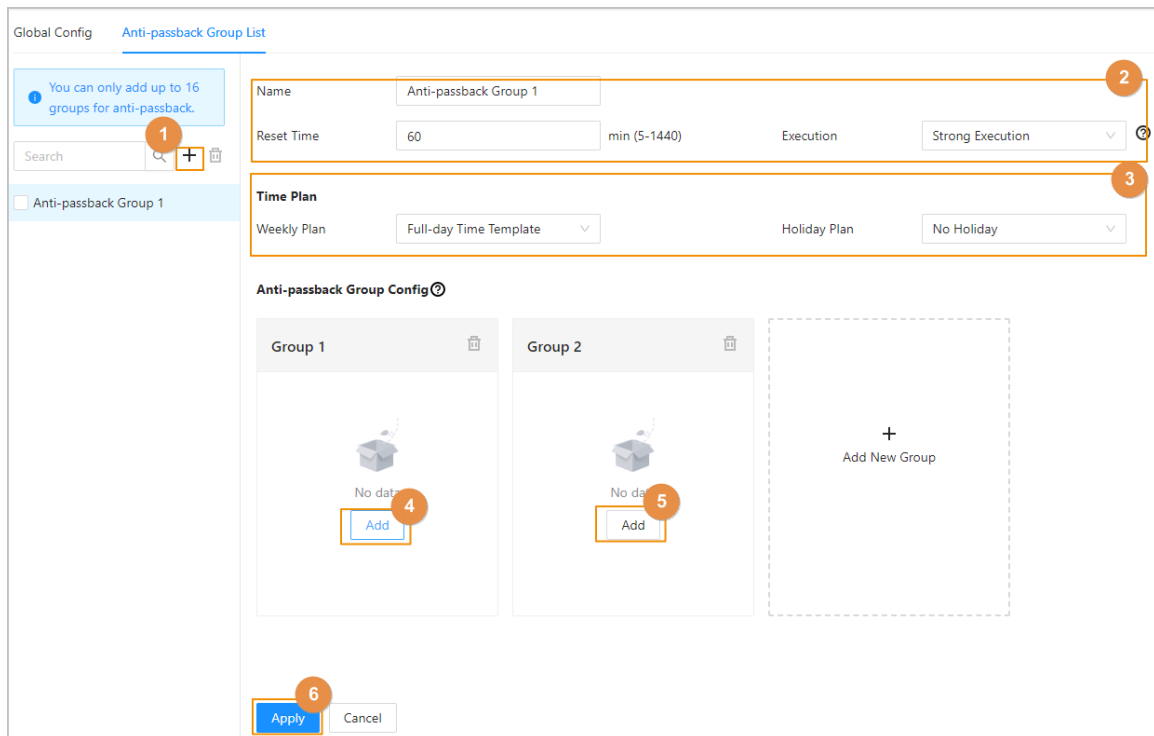

Step 4 Create a name for the anti-passback group, enter a reset time, and then select the execution mode.

Set a time period when the anti-passback alarm will be triggered. For example, if the reset time is set to 30 minutes, when a person enters after being authorized, and exits without being authorized, if they attempt to enter again in 30 minutes, an anti-passback alarm will be triggered.

- Strong execution: The sub controller and main controller perform the anti-passback function even when they go offline.
- Weak execution: The sub controller and main controller do not perform the anti-passback function when they go offline.

Step 5 Select the weekly plan and the holiday plan.

Anti-passback is effective during the defined time.

Step 6 In group 1, click **Add**, and then select card readers.

Step 7 In group 2, click **Add**, and then select card readers.



At least 2 groups must be added.

Step 8 (Optional) You can click **Add New Group** to add more groups.


You can add more than one readers in a group, and users can swipe at any one of the readers to gain access.

Step 9 Click **Apply**.

Results

The group number indicates the sequence of swiping cards. Card must be used following the specific sequence of groups. For example, you must swipe card at a reader in group 1, and then at a reader for group 2, and then at a reader in group 3, etc. As long as you swipe card following the established sequence, the system works fine.

Figure 2-48 Anti-passback function

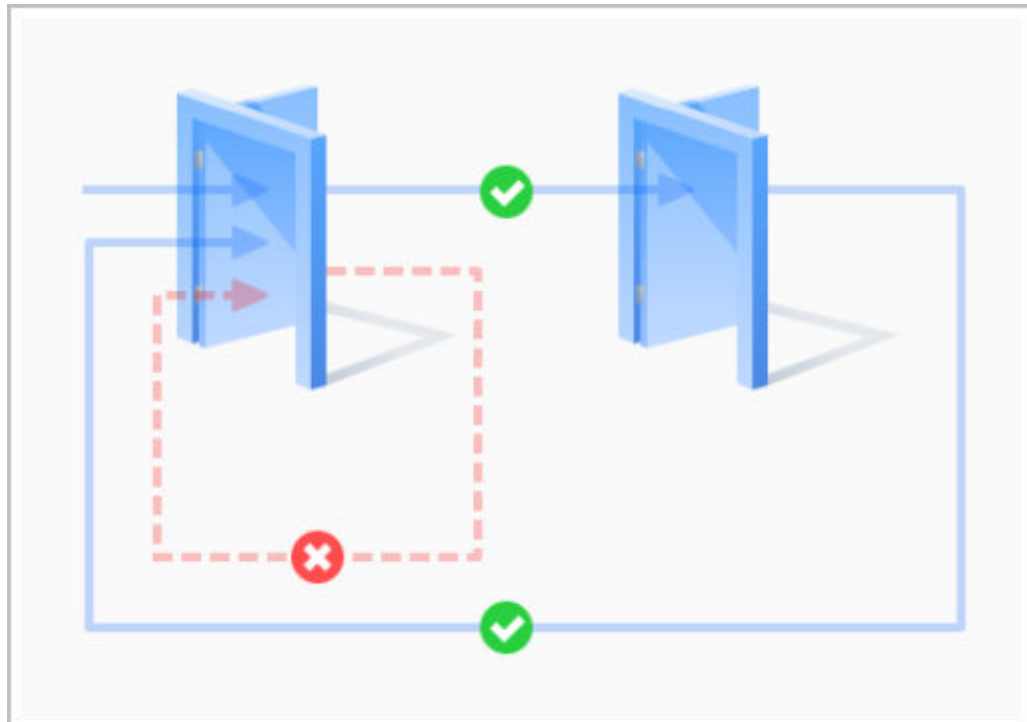

2.2.19 Configuring Multi-Door Interlock

Multi-door interlock controls the locking of two or more doors. If one door is unlocked, access will be prohibited for the remaining doors.

Background Information



- When you have configured multi-door interlock for sub controllers through the main controller, and you plan on restoring the main controller to its factory defaults, we recommend you also restore the sub controller to its factory defaults at the same time.
- If the multi-door interlock rule is used when the network is not stable, the door might open after an identity is verified, but a time-out alarm might be triggered on the card reader. Please make sure your network is stable.

2.2.19.1 Configuring Interlock within a Group

If any doors in a group is opened, the other doors in the group cannot be unlocked.

Procedure

- Step 1** Select **Access Control Config > Global Multi-door Interlock**, and then click **Interlock within Group**.
- Step 2** Click **+**, and then add a interlock group.
- Step 3** Create a name for the interlock group, and then select the execution mode.
 - Strong execution: The sub controller and main controller perform the interlock function even when they go offline.
 - Weak execution: The sub controller and main controller do not perform the interlock function when they go offline.
- Step 4** Click **Add** to add doors in a device group.



At least 2 doors must be added to a group.

Figure 2-49 Interlock within a group

Step 5 Click **Apply**.

Results

After a person's identity has been verified and they opened the door, they have to close the door behind them first before they can open the next door.

2.2.19.2 Configuring Interlock between Groups


If any doors in a group is unlocked, the doors in the other groups cannot open.

Procedure

Step 1 Select **Access Control Config > Global Multi-door Interlock**, and then click **Interlock between Groups**.

Step 2 Click **+**, and then add a interlock group.

Figure 2-50 Interlock between groups

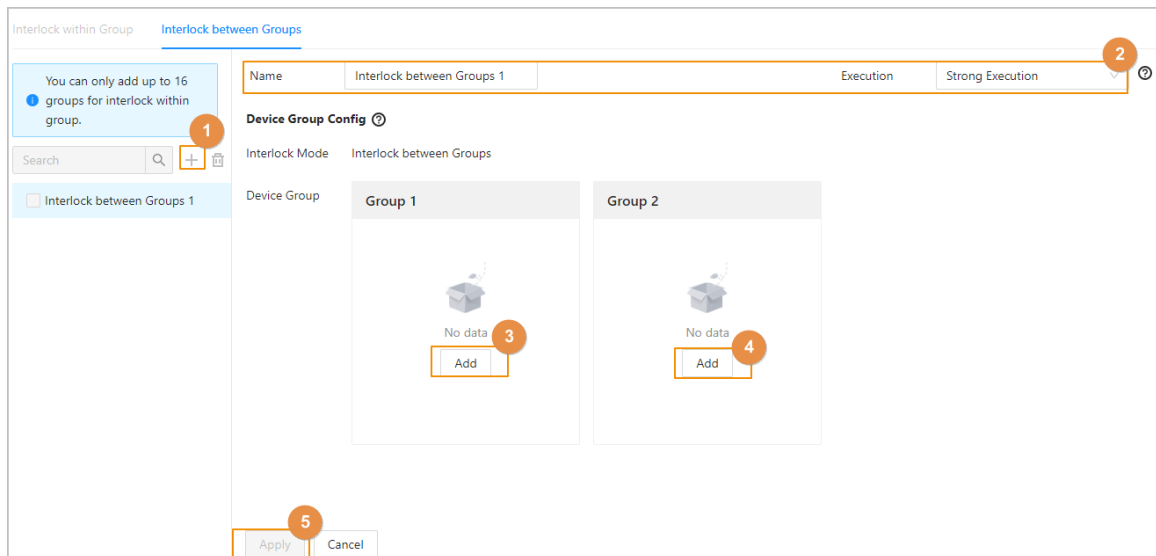

Step 3 Create a name for the interlock group, and then select the execution mode.

- Strong execution: The sub controller and main controller perform interlock function even when they go offline.
- Weak execution: The sub controller and main controller do not perform interlock function when they go offline.

Step 4 In group 1, click **Add** to add doors to the group.

Step 5 In group 2, click **Add** to add doors to the group.

Step 6 Click **Apply**.

Results

If any doors in one group is unlocked, the doors in the other group cannot open.

2.2.20 Access Monitoring (Optional)

2.2.20.1 Remotely Opening and Closing Doors


You can remotely monitor and control the door through platform. For example, you can remotely open or close the door.

Procedure


Step 1 Click **Access Monitoring** on the home page.

Step 2 Select the door, and then click **Open** or **Close** to remotely control the door.

Figure 2-51 Remotely control the door

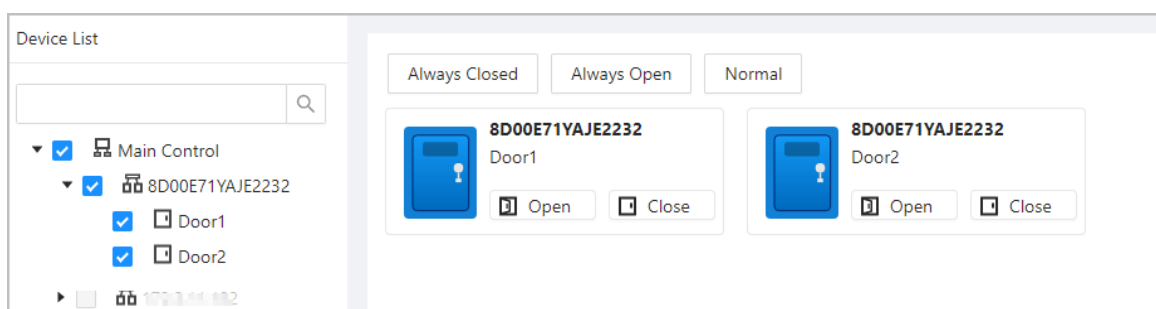

Related Operations

- Event filtering: Select the event type in **Event Info**, and the event list displays the selected event types, such as alarm events and abnormal events.
- Event deleting: Click  to clear all events from the event list.


2.2.20.2 Setting Always Open and Always Closed

After setting always open or always close, the door remains open or closed all the time.

Procedure

- Step 1 Click **Access Monitoring** on the home page.
- Step 2 Click **Always Open** or **Always Closed** to open or close the door.

Figure 2-52 Always open or close

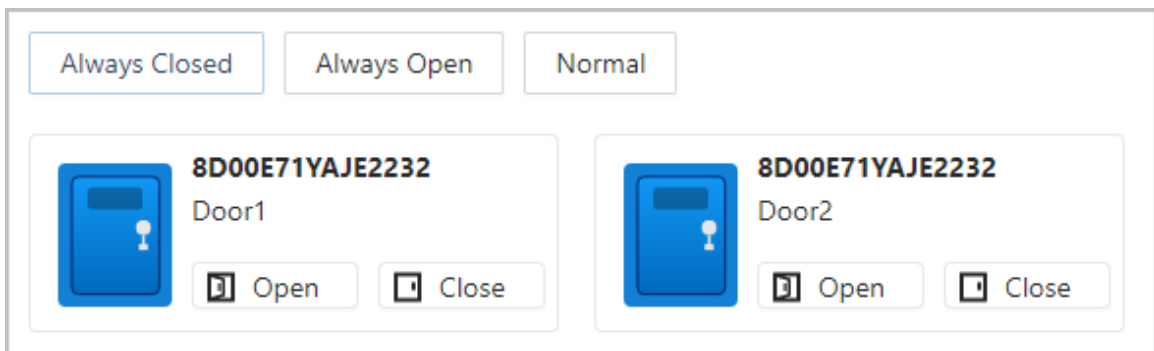

The door will remain open or closed all the time. You can click **Normal** to restore access control to its normal status, and the door will be open or closed based on the configured verification methods.

2.2.21 Local Device Configurations (Optional)

Local device configurations can only be applied to the local Access Controllers.

2.2.21.1 Configure Local Alarm Linkages

You can only configure local alarm linkages on the same access controller. Each controller has 2 alarm inputs and 2 alarm outputs.

Procedure

- Step 1 On the home page, select **Local Device Config** > **Local Alarm Linkage**.
- Step 2 Click  to configure local alarm linkage.

Figure 2-53 Local alarm linkage

Modify

Alarm Input Channel

1

Alarm Input Name

Zone1

Alarm Input Type

Normally Open

Link Fire Safety Control

Alarm Output

Duration

30

s (1-300)

Alarm Output Channel

☒ 1 ☐ 2

Access Control Linkage

Door1

Always Open



Door2

Always Open

OK

Cancel

Table 2-11 Local alarm linkage

Parameter	Description
Alarm input channel	<p>The number of the alarm input channel.</p> <p></p> <p>Each controller has 2 alarm inputs and 2 alarm outputs.</p>
Alarm Input Name	The name of the alarm input.
Alarm Input Type	<p>The type of the alarm input.</p> <ul style="list-style-type: none"> ● Normally Open ● Normally Closed
Link Fire Safety Control	If you turn on the link fire safety control, all the doors will open when the fire alarm is triggered.
Alarm Output	You can turn on the alarm output function.
Duration	When an alarm is triggered, the alarm remains on for a defined time.
Alarm Output Channel	<p>Select the alarm output channel.</p> <p></p> <p>Each controller has 2 alarm inputs and 2 alarm outputs.</p>
Access Control Linkage	Turn on this function to configure the door linkage.
Door1/Door2	Set the door to always open or always closed status. When an alarm is triggered, the door will automatically open or close.

Step 3 Click **OK**.

2.2.21.2 Configuring Card Rules

The platform supports 5 types of Wiegand formats by default. You can also add custom Wiegand formats.


Procedure

Step 1 On the home page, select **Local Device Config** > **Access Card Rule Config**.

Step 2 Click **Add**, and then configure new Wiegand formats.

You can also Click **Add Protocol** to import a Wiegand file to the platform.

Figure 2-54 Add new Wiegand formats

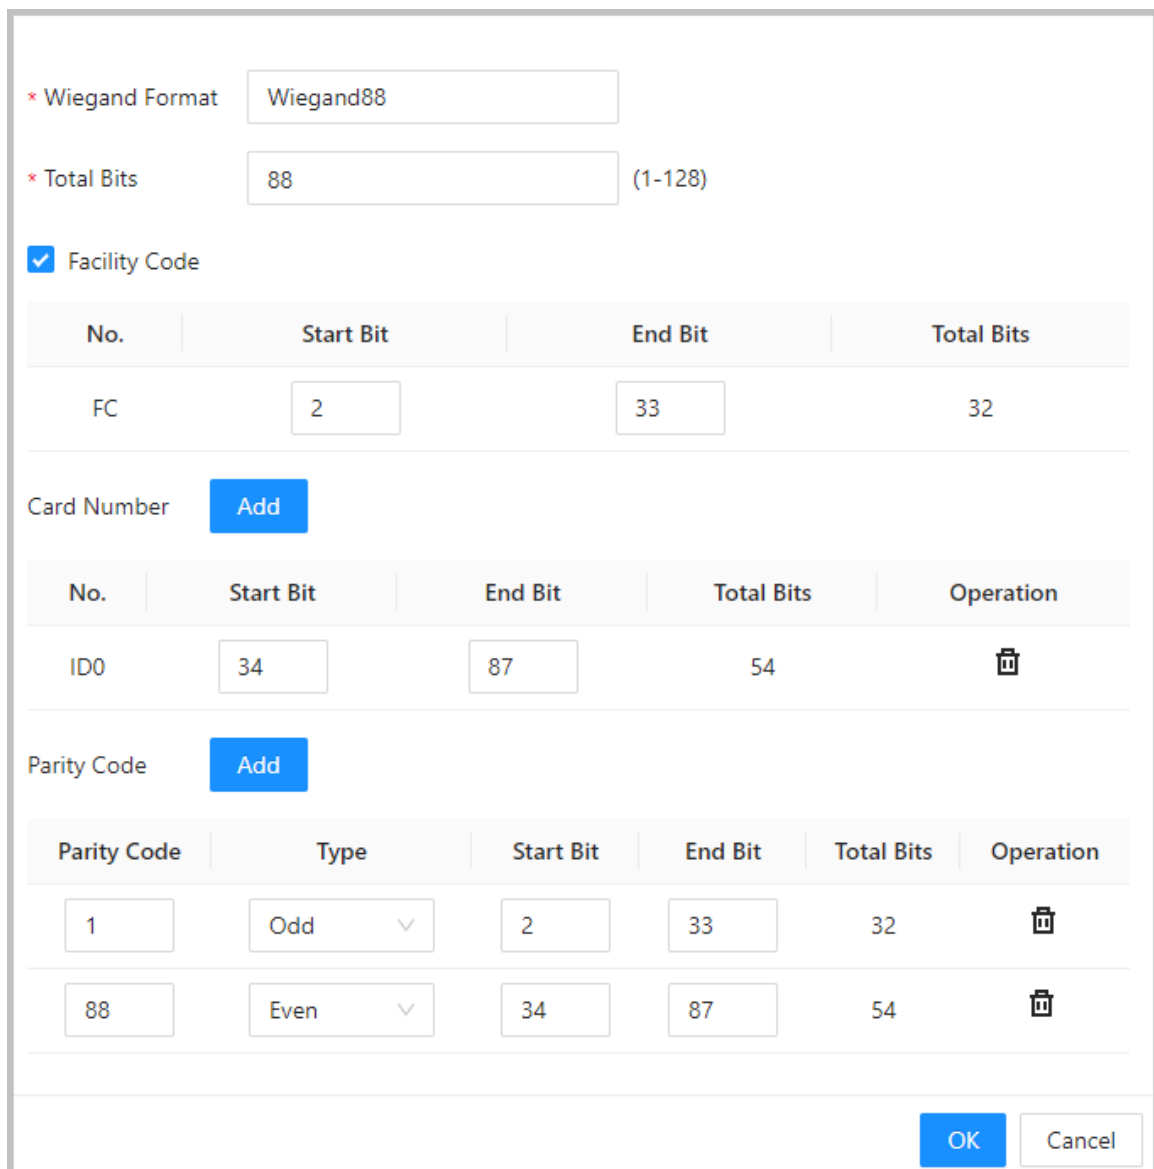

* Wiegand Format

* Total Bits (1-128)

☒ Facility Code

No.	Start Bit	End Bit	Total Bits
FC	<input type="text" value="2"/>	<input type="text" value="33"/>	32

Card Number

No.	Start Bit	End Bit	Total Bits	Operation
ID0	<input type="text" value="34"/>	<input type="text" value="87"/>	54	

Parity Code

Parity Code	Type	Start Bit	End Bit	Total Bits	Operation
<input type="text" value="1"/>	Odd <input type="button" value="v"/>	<input type="text" value="2"/>	<input type="text" value="33"/>	32	
<input type="text" value="88"/>	Even <input type="button" value="v"/>	<input type="text" value="34"/>	<input type="text" value="87"/>	54	

Table 2-12 Configure the Wiegand format

Parameter	Description
Wiegand format	The name of the Wiegand format.

Parameter	Description
Total bits	Enter the total number of bits.
Facility Code	Enter the start bit and the end bit for the facility code.
Card number	Enter the start bit and the end bit for the card number.
Parity Code	1. Enter the even parity start bit and even parity end bit. 2. Enter the odd parity start bit and odd parity end bit.

Step 3 Click **OK**.

Related Operations

- Facility Code: If this function is enabled and you set **Card No. System** to decimal format on the **Person Management** page, the facility code and the card number are transformed into decimal format separately, and then combine together.
- HID26: If this function is turned on:
 - ◇ Only Wiegand 26 is supported.
 - ◇ The platform only supports displaying card in decimal format.
 - ◇ The card number must have 5 characters and the facility code must have 3 characters at most. When you manually entering card, the system will automatically add leading zero to fixed number length. For example, if the card number you enter is less than 5 characters, like 56, leading zero is added to fix the number length to 5 characters, like 00056, and another 0 is added to function as a facility code. Therefore, the final card No. will be 000056.


2.2.21.3 Backing up System Logs

Procedure

Step 1 On the home page, select **Local Device Config** > **System Logs**.

Step 2 Select the type of log, and then select the time range.

Figure 2-55 Back up logs

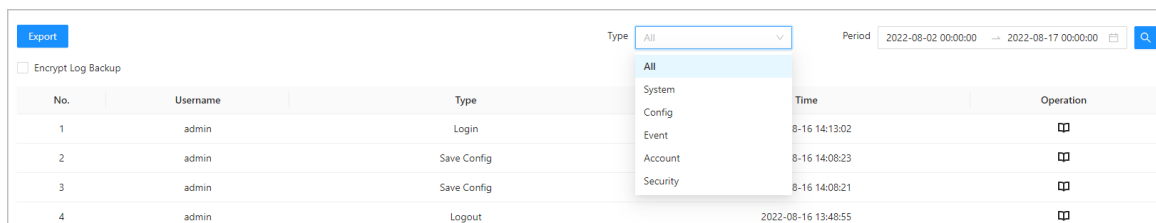

Export		Type	All	Period	2022-08-02 00:00:00 → 2022-08-17 00:00:00
<input type="checkbox"/> Encrypt Log Backup					
No.	Username	Type		Time	Operation
1	admin	Login		8-16 14:13:02	□
2	admin	Save Config		8-16 14:08:23	□
3	admin	Save Config		8-16 14:08:21	□
4	admin	Logout		2022-08-16 13:48:55	□

Step 3 Click **Encrypt Log Backup**, and then enter the password to back up encrypted logs.

Step 4 (Optional) You can also click **Export** to export logs.

2.2.21.4 Configuring Network

2.2.21.4.1 Configuring TCP/IP


You need to configure the IP address of the Access Controller to make sure that it can communicate with other devices.

Procedure

Step 1 Select **Local Device Config** > **Network Setting** > **TCP/IP**.


Step 2 Configure the parameters.

Figure 2-56 TCP/IP

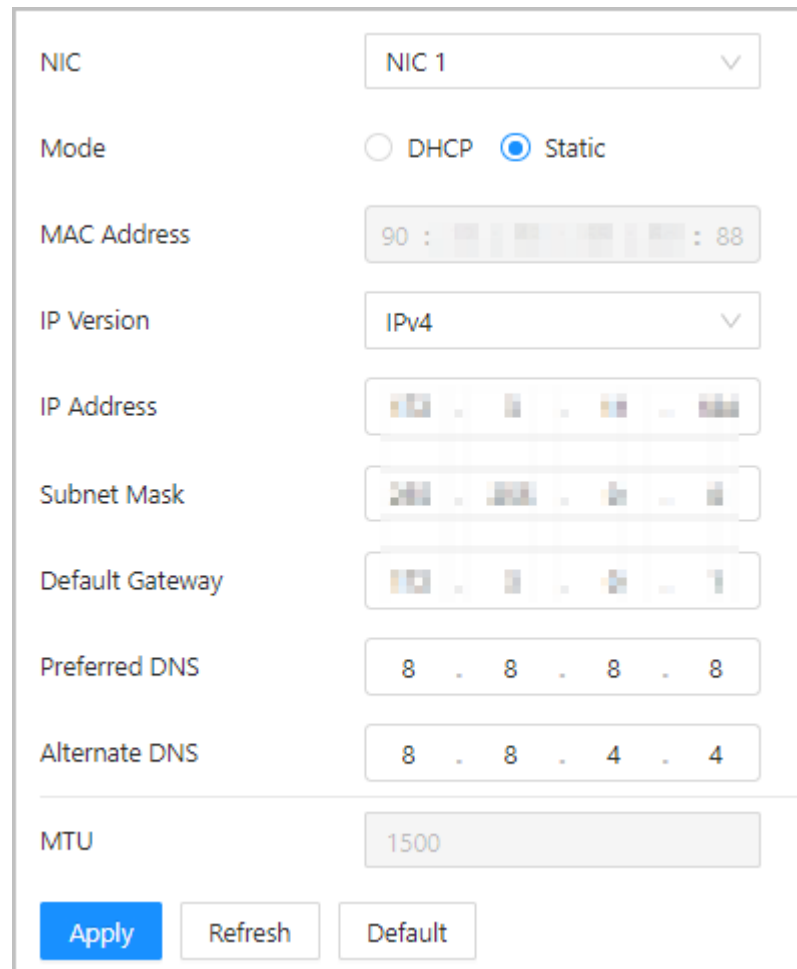

The screenshot displays a network configuration window. At the top, the 'NIC' is set to 'NIC 1'. Below it, the 'Mode' is set to 'Static' (indicated by a blue dot). The 'MAC Address' field shows '90 : 88'. The 'IP Version' is set to 'IPv4'. The 'IP Address', 'Subnet Mask', and 'Default Gateway' fields are empty. The 'Preferred DNS' field is set to '8.8.8.8' and the 'Alternate DNS' field is set to '8.8.4.4'. The 'MTU' field is set to '1500'. At the bottom, there are three buttons: 'Apply' (blue), 'Refresh', and 'Default'.

Table 2-13 Description of TCP/IP

Parameter	Description
IP Version	IPv4.
MAC Address	MAC address of the Access Controller.
Mode	<ul style="list-style-type: none"> • Static : Manually enter IP address, subnet mask, and gateway. • DHCP : Dynamic Host Configuration Protocol. <p>When DHCP is turned on, the Access Controller will automatically be assigned IP address, subnet mask, and gateway.</p>
IP Address	If you select static mode, configure the IP address, subnet mask and gateway.
Subnet Mask	
Default Gateway	
	 <p>IP address and gateway must be on the same network segment.</p>
Preferred DNS	Set the IP address of the preferred DNS server.
Alternate DNS	Set the IP address of the alternate DNS server.

Step 3 Click **OK**.

2.2.21.4.2 Configuring Ports

You can limit access to the Access Controller at the same time through web, desktop client and phone.

Procedure

Step 1 Select **Local Device Config** > **Network Setting** > **Port**.

Step 2 Configure port numbers.



You need to restart the controller to make the configurations effective for all the parameters except **Max Connection** and **RTSP Port**.

Figure 2-57 Configure ports

Max Connection	<input type="text" value="1000"/>	(1-1000)
TCP Port	<input type="text" value="37777"/>	(1025-65535)
HTTP Port	<input type="text" value="80"/>	(1-65535)
HTTPS Port	<input type="text" value="443"/>	(1-65535)
<input type="button" value="Apply"/> <input type="button" value="Refresh"/> <input type="button" value="Default"/>		

Table 2-14 Description of ports

Parameter	Description
Max Connection	You can set the maximum number of clients that can access the Access Controller at the same time, such as the web client, desktop client and phone.
TCP Port	It is 37777 by default.
HTTP Port	It is 80 by default. If you want to change the port number, add the new port number after the IP address when you log in to the webpage.
HTTPS Port	It is 443 by default.

Step 3 Click **OK**.

2.2.21.4.3 Configuring Cloud Service

Add the Main Controller to DMSS before you request Bluetooth cards for users. For details on using DMSS, see the user's manual of DMSS.

Background Information



If you have changed the password of the Main Controller, or restored it to factory defaults, you need to delete the controller on DMSS and add it to DMSS again.


Procedure

Step 1 On the home page, select **Local Device Config** > **Network Setting** > **Cloud Service**.

Step 2 Turn on the cloud service function.

The cloud service function is turned on by default.

Figure 2-58 Cloud service

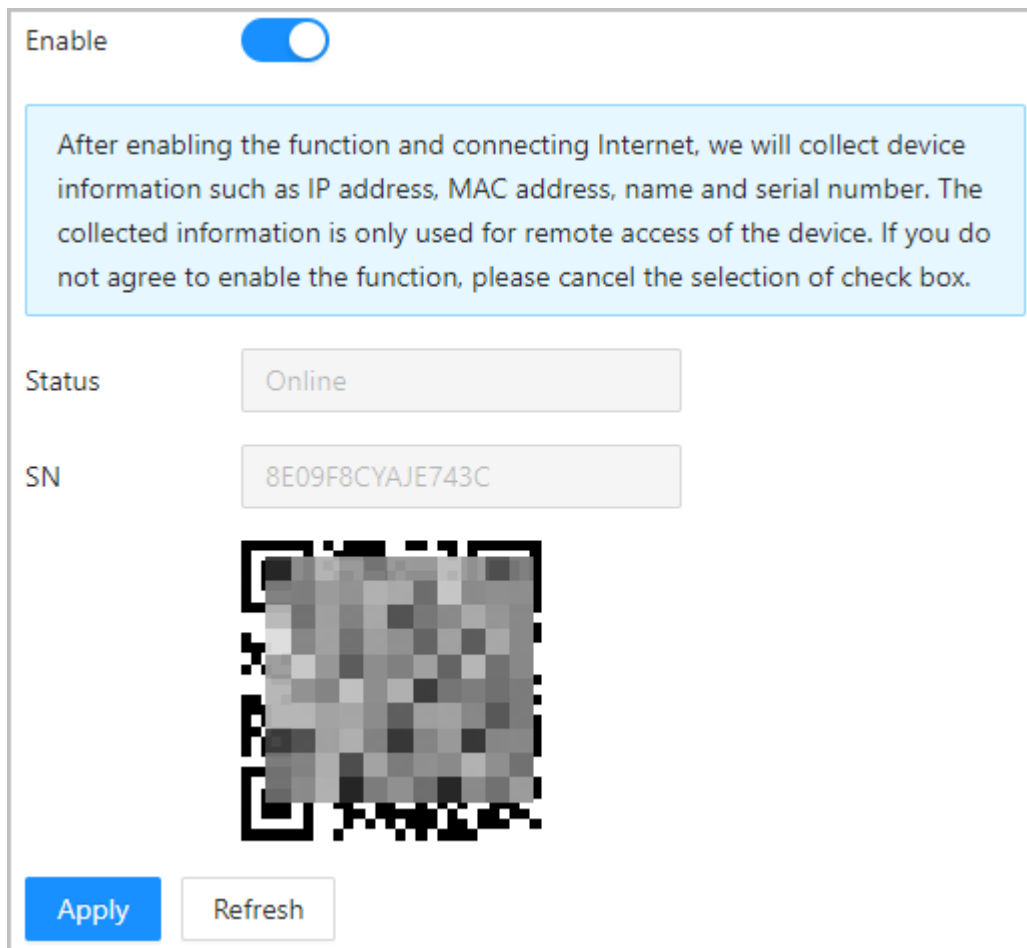


Enable ☒

After enabling the function and connecting Internet, we will collect device information such as IP address, MAC address, name and serial number. The collected information is only used for remote access of the device. If you do not agree to enable the function, please cancel the selection of check box.

Status

SN



Step 3 Click **Apply**.

Step 4 Download DMSS and sign up with Email, scan the QR code with DMSS to add the Access Controller to it.

2.2.21.4.4 Configuring Automatic Registration

The Access Controller reports its address to the designated server so that you can get access to the Access Controller through the management platform.

Procedure

- Step 1** On the home page, select **Network Setting** > **Register**.
- Step 2** Enable the automatic registration function, and then configure the parameters.

Figure 2-59 Register

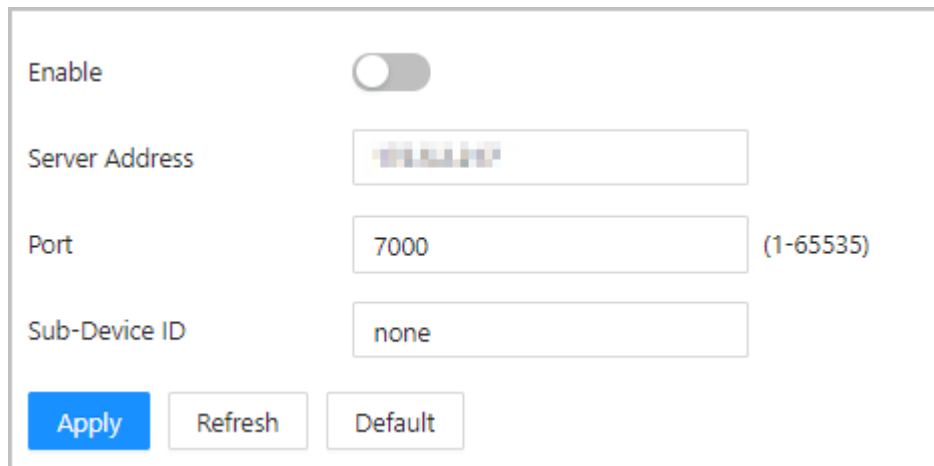



Table 2-15 Automatic registration description

Parameter	Description
Server Address	The IP address of the server.
Port	The port of the server used for automatic registration.
Sub-Device ID	<p>Enter the sub-device ID (user defined).</p> <p></p> <p>When you add the Access Controller to the management platform, the sub-device ID on the management platform must conform to the defined sub-device ID on the Access Controller.</p>

- Step 3** Click **Apply**.

2.2.21.4.5 Configuring Basic Service

When you want to connect the Access Controller to a third-party platform, turn on the CGI and ONVIF functions.

Procedure

- Step 1** Select **Network Settings** > **Basic Service**.
- Step 2** Configure the basic service.

Figure 2-60 Basic service

SSH

☒

CGI

☒

ONVIF

☒

Private Protocol

☒

Emergency Maintenance

☒

For easy access to our after-sales service, enable this function. If the device has any trouble performing functions, such as updating, the system will automatically enable this function.

Private Protocol Authentication Mode

Security Mode (Recommended) ▾

TLS1.1

☐

Apply

Refresh

Default

Table 2-16 Basic service parameter description

Parameter	Description
SSH	SSH, or Secure Shell Protocol, is a remote administration protocol that allows users to access, control, and modify their remote servers over the internet.
CGI	The Common Gateway Interface (CGI) is an intersection between web servers through which the standardized data exchange between external applications and servers is possible.
ONVIF	ONVIF stands for Open Network Video Interface Forum. Its aim is to provide a standard for the interface between different IP-based security devices. These standardized ONVIF specifications are like a common language that all devices can use to communicate.
Private Protocol	<div> <div>The platform adds devices through TLSv1.1 protocol.</div> <div> <div></div> <div>Security risks might present when TLSv1.1 is enabled. Please be advised.</div> </div> </div>
Emergency Maintenance	It is turned off by default.
Private Protocol Authentication Mode	<div>Set the authentication mode, including safe mode and compatibility mode. It is recommended to choose Security Mode.</div> <ul style="list-style-type: none"> Security Mode (recommended): Does not support accessing the device through Digest, DES, and plaintext authentication methods, improving device security. Compatible Mode: Supports accessing the device through Digest, DES, and plaintext authentication methods, with reduced security.

Step 3 Click **Apply**.

2.2.21.5 Configuring Time


Procedure

Step 1 On the home page, select **Local Device Config** > **Time**.

Step 2 Configure the time of the Platform.

Figure 2-61 Date settings

Time and Time Zone



Date :
2022-07-07 Thursday
Time :
10:21:35

Time
☒ Manual Settings
☐ NTP

Time

2022-07-07 10:21:35

Sync PC

Time Format

YYYY-MM-DD

24-Hour

-

Time Zone

(UTC+08:00) Beijing, Chongqing, Harbin, Urumqi

DST

Enable
☐

Type
☒ Date
☐ Week

Start Time

01-01 00:00

End Time

01-02 00:00

Apply

Refresh

Default

Table 2-17 Time settings description

Parameter	Description
Time	<ul style="list-style-type: none"> Manual Settings: Manually enter the time or you can click Sync PC to sync time with computer. NTP: The Access Controller will automatically sync the time with the NTP server. <ul style="list-style-type: none"> Server : Enter the domain of the NTP server. Port : Enter the port of the NTP server. Interval : Enter its time with the synchronization interval.
Time format	Select the time format for the Platform.
Time Zone	Enter the time zone of the Access Controller.
DST	<ol style="list-style-type: none"> (Optional) Enable DST. Select Date or Week from the Type. Configure start time and end time.

Step 3 Click **Apply**.

2.2.21.6 Account Management

You can add or delete users, change user password, and enter an email address for resetting your password if you forget it.

2.2.21.6.1 Adding Administrator Accounts

Add administrators on the Access Controller.

Procedure


Step 1 On the home page, select **Local Device Config** > **Account Management** > **Account**.

Step 2 Click **Add**, and then enter the user information.



- The username cannot be the same as the existing account. The username can contain up to 31 characters, and supports numbers, letters, underlines, dots, and @.
- The password must contain 8 to 32 non-blank characters and contain at least 2 types of the following characters: upper case and lower case letters, numbers, and special characters (excluding ' " ; &). Set a high-security password by following the password strength prompt.

Figure 2-62 Add administrator accounts

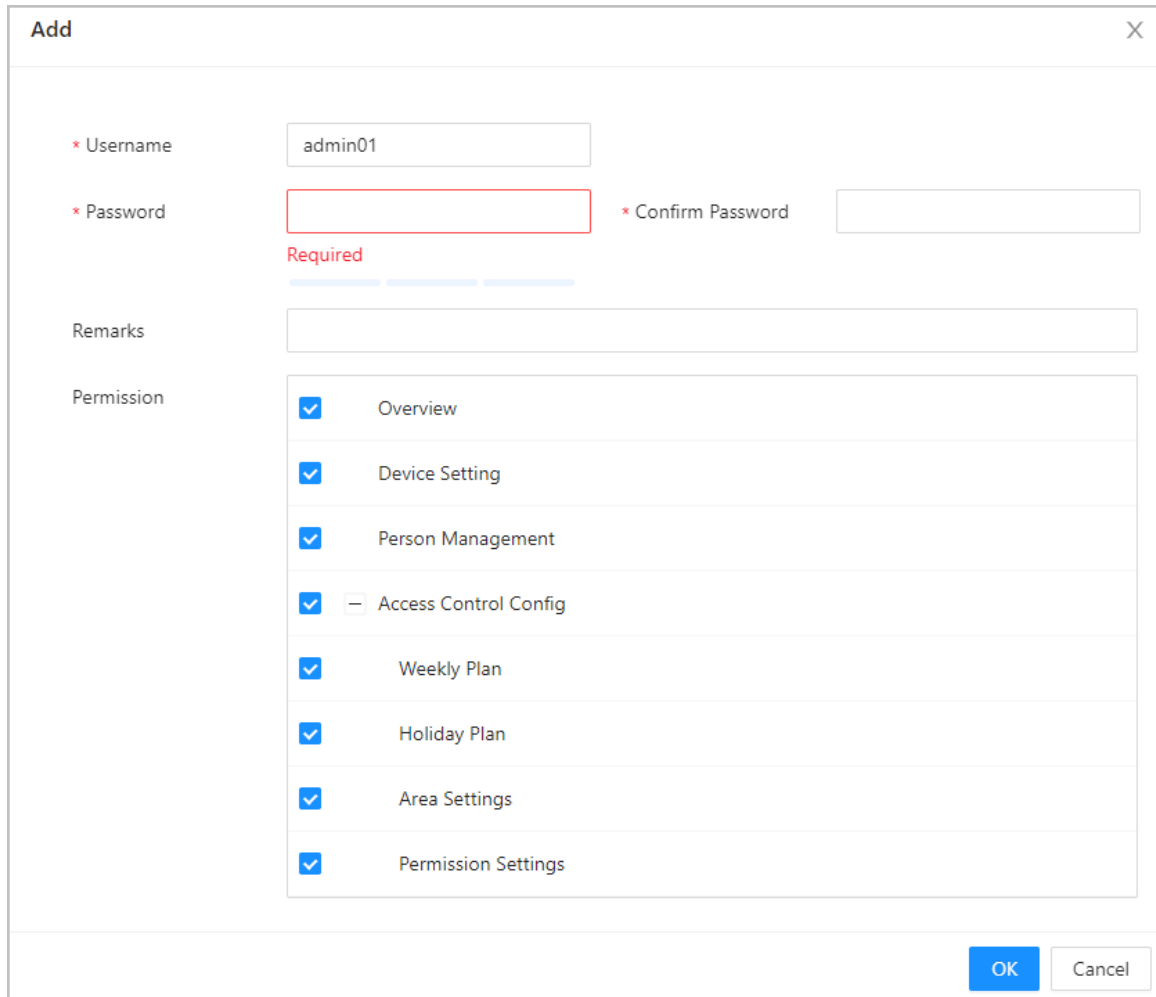

Add

* Username

admin01

* Password

Required

* Confirm Password

Remarks

Permission

☒ Overview

☒ Device Setting

☒ Person Management

☒ ☐ Access Control Config

☒ Weekly Plan

☒ Holiday Plan

☒ Area Settings

☒ Permission Settings

OK

Cancel

Step 3 Click **OK**.



Only admin account can change password and the admin account cannot be deleted.

2.2.21.6.2 Resetting the Password

Reset the password through the linked e-mail when you forget your password.


Procedure

Step 1 Select **Local Device Config** > **Account Management** > **Account**.

Step 2 Enter the email address, and set the password expiration time.

Step 3 Turn on the password reset function.

Figure 2-63 Reset password

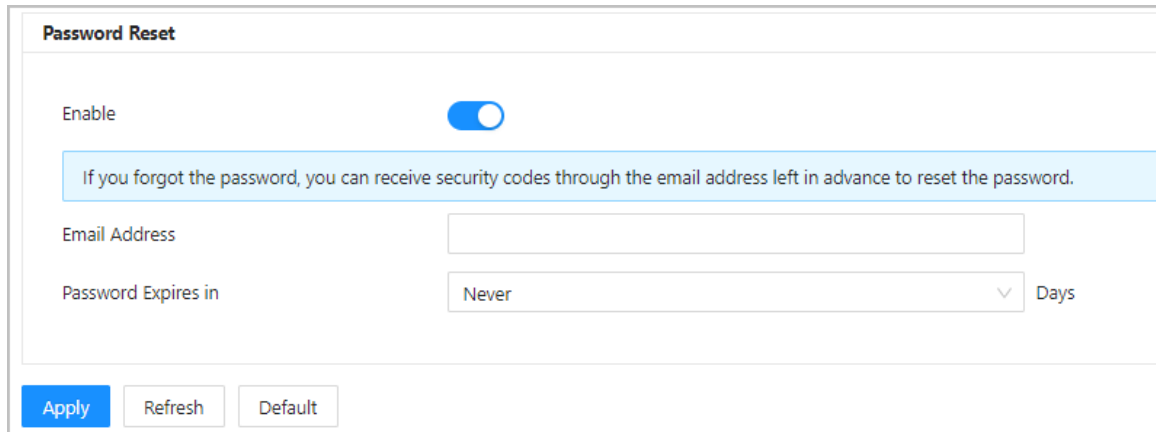

Password Reset

Enable ☒

If you forgot the password, you can receive security codes through the email address left in advance to reset the password.

Email Address

Password Expires in Days

Apply Refresh Default



If you forgot the password, you can receive security codes through the linked email address to reset the password.

Step 4 Click **Apply**.

2.2.21.6.3 Adding ONVIF Users


Open Network Video Interface Forum (ONVIF), a global and open industry forum that was established for the development of a global open standard for the interface of physical IP-based security products, which allows the compatibility from different manufactures. ONVIF users have their identities verified through ONVIF protocol. The default ONVIF user is admin.

Procedure

Step 1 On the home page, select **Local Device Config** > **Account Management** > **ONVIF Account**.

Step 2 Click **Add** and then configure parameters.

Figure 2-64 Add the ONVIF user

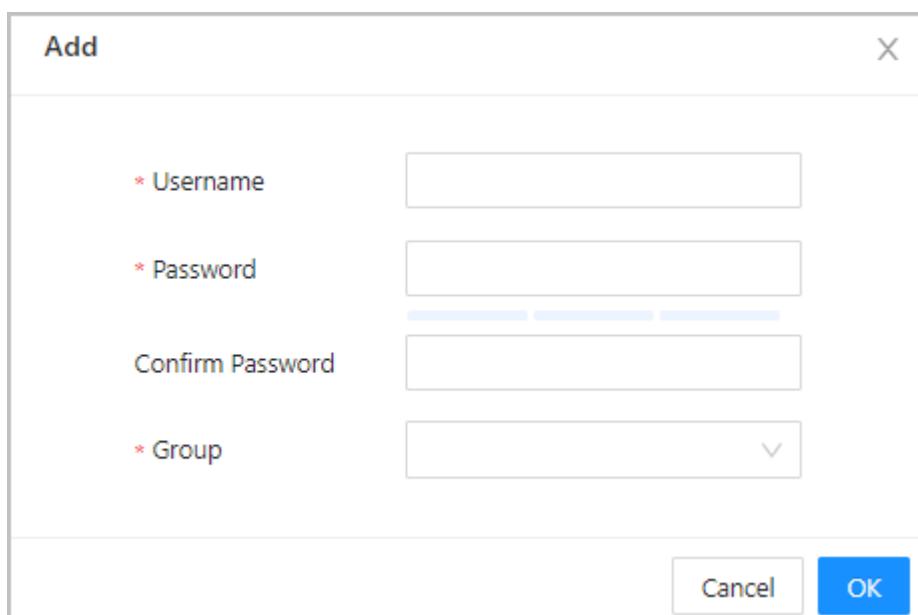

Add ✕

* Username

* Password

Confirm Password

* Group

Cancel **OK**

Table 2-18 ONVIF user description

Parameter	Description
Username	The username cannot be the same with existing account. The username consists of up to 31 characters and only allows for numbers, letters, underscores, midlines, dots, or @.
Password	The password must consist of 8 to 32 non-blank characters and contain at least two types of the following characters: Upper case, lower case, numbers, and special characters (excluding ' " ; : &).
Group	<p>There three permission groups which represents different permission levels.</p> <ul style="list-style-type: none"> admin: You can access user management on the ONVIF Device Manager. Operator: You cannot access user management on the ONVIF Device Manager. User: You cannot access user management and system logs on the ONVIF Device Manager.

Step 3 Click **OK**.

2.2.21.7 Maintenance


You can regularly restart the Access Controller during its idle time to improve its performance. It is **Never** by default. We recommend you change it to one day a week.

Procedure

Step 1 Log in to the webpage.

Step 2 Select **Local Device Config** > **Maintenance**.

Figure 2-65 Maintenance

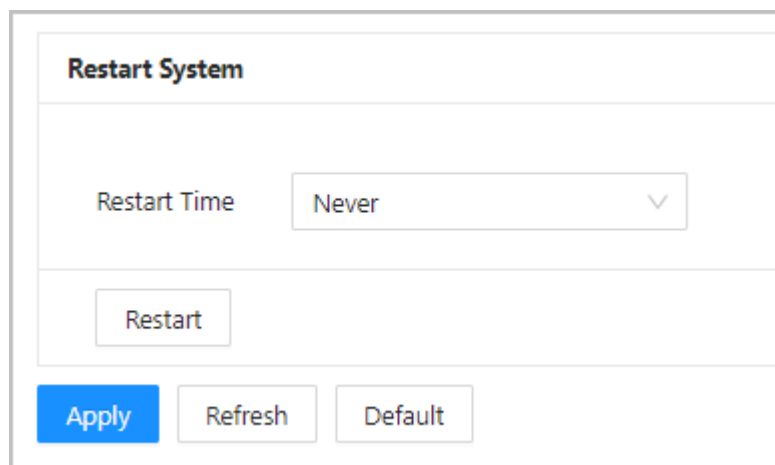

Step 3 Set the restart time, and then click **OK**.

Step 4 (Optional) Click **Restart**, and the Access Controller will restart immediately.

2.2.21.8 Advanced Management

When more than one Access Controller requires the same configurations, you can configure them quickly by importing or exporting configuration files.

2.2.21.8.1 Exporting and Importing Configuration Files

You can import and export the configuration file for the Access Controller. When you want to apply the same configurations to multiple devices, you can import the configuration file to them.

Background Information




Configurations on device management, advanced access control, time schedules, hardware cannot be exported.

Procedure

- Step 1 Log in to the webpage.
- Step 2 Select **Local Device Config** > **Advanced Settings**.

Figure 2-66 Configuration management

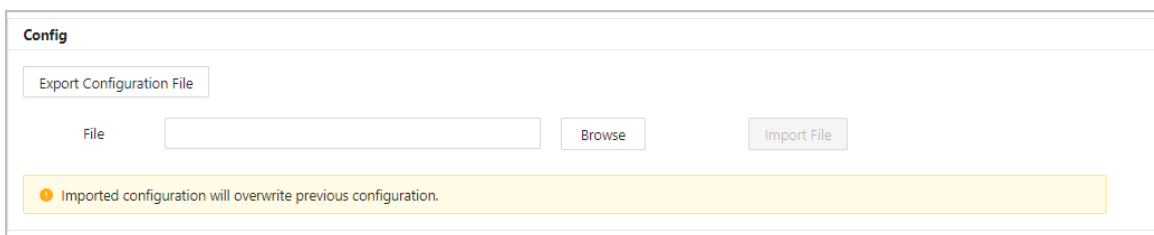

- Step 3 Export or import configuration files.
- Export the configuration file.
Click **Export Configuration File** to download the file to the local computer.



The IP will not be exported.

- Import the configuration file.
 - Click **Browse** to select the configuration file.
 - Click **Import configuration**.



Configuration files can only be imported to devices that have the same model.

2.2.21.8.2 Configuring the Card reader

Procedure

- Step 1 On the home page, select **Local Device Config** > **Advanced Settings**.
- Step 2 Configure the card reader.

Figure 2-67 Configure the card reader

Card Reader Settings

Door Channel

1

Card No. Inversion

☐ Enable
☒ Close

Reader

Reader 1

Baud Rate

☒ 9600
☐ 115200

Apply

Refresh

Default

2.2.21.8.3 Configuring the Fingerprint Level

On the home page, select **Local Device Config** > **Advanced Settings**, and then enter the fingerprint threshold. The value ranges from 1 to 10, and higher value means higher recognition accuracy.

Figure 2-68 Fingerprint level

Fingerprint Settings

Fingerprint Similarity Threshold

3

(1-10)

Apply

Refresh

Default

2.2.21.8.4 Configuring RS-485 Expansion

If the Access Controller is mounted to the access controller metal case, select **Local Device Config** > **RS-485 Expansion**, and then select **Access Control Metal Case**.

2.2.21.8.5 Restoring the Factory Default Settings

Procedure

Step 1 Select **Local Device Config** > **Advanced Settings**.



Restoring the **Access Controller** to its default configurations will result in data loss. Please be advised.

Step 2 Restore to the factory default settings if necessary.

- **Factory Defaults** : Resets all the configurations of the Controller and delete all the data.
- **Restore to Default (Except for User Info)** : Resets the configurations of the Access Controller and deletes all the data except for user information, and information that was configured during the login wizard).



Only the main controller supports **Restore to Default (Except for User Info)**.

2.2.21.9 Updating the System



- Use the correct update file. Make sure that you get the correct update file from technical support.
- Do not disconnect the power supply or network, and do not restart or shutdown the Access Controller during the update.

2.2.21.9.1 File Update

Procedure

Step 1 On the home page, select **Local Device Config** > **System Update**.

Step 2 In **File Update**, click **Browse**, and then upload the update file.



The update file should be a .bin file.

Step 3 Click **Update**.

The Access Controller will restart after the update finishes.

2.2.21.9.2 Online Update

Procedure

Step 1 On the home page, select **Local Device Config** > **System Update**.

Step 2 In the **Online Update** area, select an update method.

- Select **Auto Check for Updates**, and the Access Controller will automatically check for the latest version update.
- Select **Manual Check**, and you can immediately check whether the latest version is available.

Step 3 Click **Manual Check** to update the Access Controller when the latest version update is available.

2.2.21.10 Configuring Hardware


On the home page, select **Local Device Config** > **Hardware**. You can view the hardware you have configured when you log in to the platform for the first time. You can also click **Reset Hardware Config** to re-configure the hardware. For details, see Table 2-1 .



When you switch between single door and double door, we recommend you restore the main controller factory defaults.

The wiring diagram is generated for your reference. You can download it to your computer.

Figure 2-69 Hardware

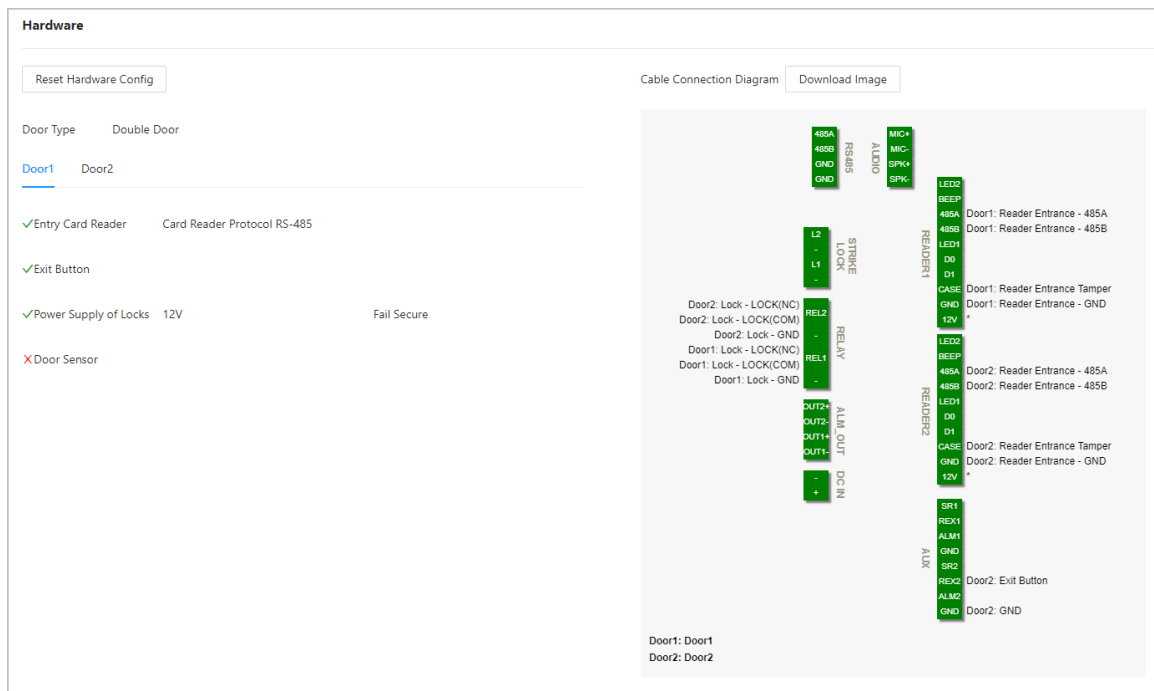

2.2.21.11 Viewing Version Information

On the home page, select **Local Device Config** > **Version Info**, and you can view information on the version, such as device model, serial number, hardware version, legal information and more.

2.2.21.12 Viewing Legal Information

On the home page, select **Local Device Config** > **Legal Info**, and you can view the software license agreement, privacy policy and open source software notice.

2.2.22 Viewing Records

You can view alarm logs and unlock logs.

2.2.22.1 Viewing Alarm Records

Procedure

- Step 1** On the home page, select **Reporting** > **Alarm Records**.
- Step 2** Select the device, department and the time range, and then click **Search**.

Figure 2-70 Alarm records

Device	All X	Event Type	All	Period	2022-08-02 00:00:00 → 2022-08-17 00:00:00	Search
Export	Extract Device Records					
No.	Time	Device	Door	Event Type		
1	2022-08-15 17:03:52	186	Door1	Unlock Timeout Alarm		
2	2022-08-15 17:02:52	186	Door1	Intrusion Alarm		

- **Export** : Exports unlock logs on the main controller to a local computer.
- **Extract Device Records** : When logs for sub controller are generated when they go online, you can extract logs from the sub controller to the main controller.

2.2.22.2 Viewing Unlock Records

Procedure

- Step 1** On the home page, select **Reporting > Unlock Records**
- Step 2** Select the device, department and the time range, and then click **Search**.

Figure 2-71 Unlock logs

Device

All X

Department

Period

2022-08-01 00:00:00

→

2022-08-17 00:00:00

Search

Export

Extract Device Records

No.	Time	User ID	Username	Card	Department	Device	Door	Status
1	2022-08-15 08:55:57			6AE09E0A		186	Door2	Failed
2	2022-08-15 08:55:45			E522E73D		186	Door1	Failed

- **Export**: Exports unlock logs.
- **Extract Device Records**: When logs on sub controller are generated when they go online, you extract logs on the sub controller to the main controller.

2.2.23 Security Settings(Optional)

2.2.23.1 Security Status

Scan the users, service, and security modules to check the security status of the Access Controller.

Background Information

- **User and service detection**: Check whether the current configuration conforms to recommendation.
- **Security modules scanning**: Scan the running status of security modules, such as audio and video transmission, trusted protection, securing warning and attack defense, not detect whether they are enabled.


Procedure

- Step 1** Select **Security > Security Status**.
- Step 2** Click **Rescan** to perform a security scan of the Access Controller.



Hover over the icons of the security modules to see their running status.

Figure 2-72 Security status

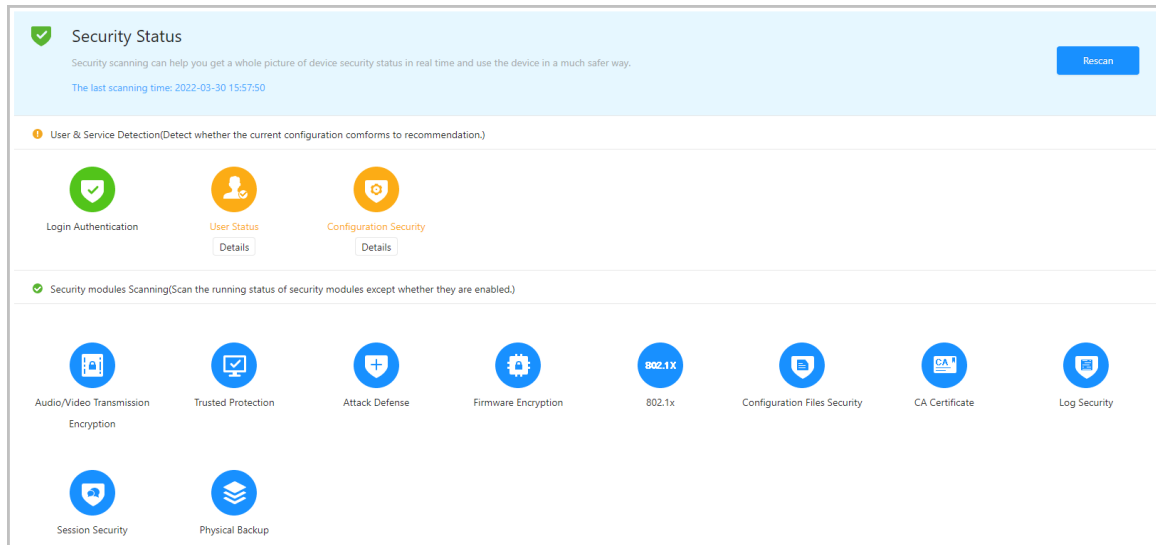

Related Operations

After you perform the scan, the results will be displayed in different colors. Yellow indicates that the security modules are abnormal, and green indicates that the security modules are normal.

- Click **Details** to view the details on the results of the scan.
- Click **Ignore** to ignore the abnormality, and it will not be scanned. The abnormality that was ignored will be highlighted in grey.

Click **Rejoin Detection**, and the abnormality that was ignored will be scanned again.

- Click **Optimize** to troubleshoot the abnormality.

2.2.23.2 Configuring HTTPS

Create a certificate or upload an authenticated certificate, and then you can log in to the webpage through HTTPS on your computer. HTTPS secures communication over a computer network.

Procedure

Step 1 Select **Security** > **System Service** > **HTTPS**.

Step 2 Turn on the HTTPS service.




If you turn on the compatible with TLS v1.1 and earlier versions, security risks might occur. Please be advised.

Step 3 Select the certificate.



If there are no certificates in the list, click **Certificate Management** to upload a certificate. For details, see "2.2.23.4 Installing Device Certificate".

Figure 2-73 HTTPS

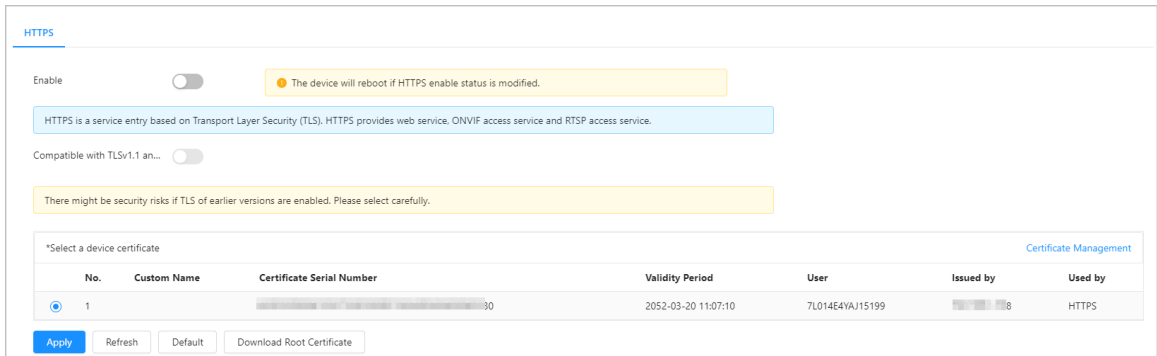

Step 4 Click **Apply**.

Enter "https://IP address: httpsport" in a web browser. If the certificate is installed, you can log in to the webpage successfully. If not, the webpage will display the certificate as wrong or untrusted.

2.2.23.3 Attack Defense

2.2.23.3.1 Configuring Firewall


Configure firewall to limit access to the Access Controller.

Procedure

Step 1 Select **Security** > **Attack Defense** > **Firewall**.

Step 2 Click ☒ to enable the firewall function.

Figure 2-74 Firewall

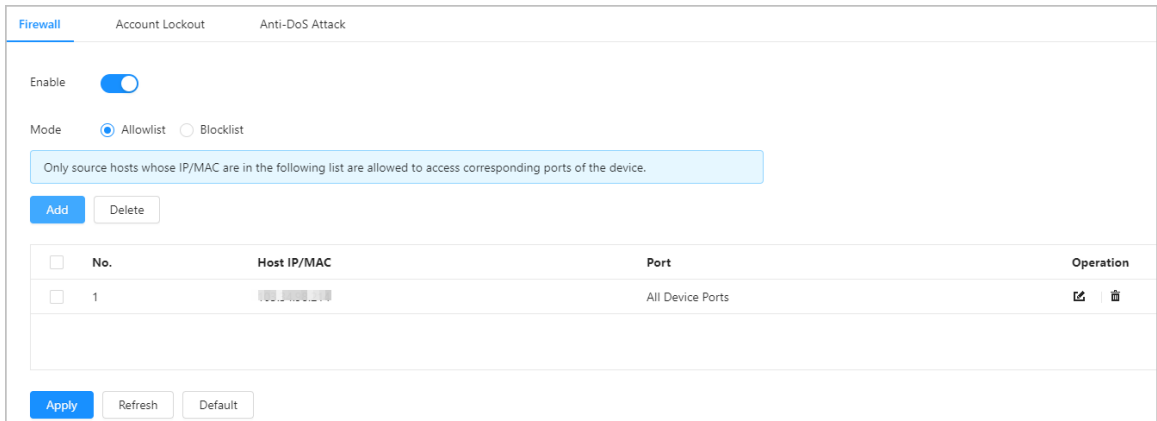


Step 3 Select the mode: **Allowlist** and **Blocklist**.

- **Allowlist**: Only IP/MAC addresses on the allowlist can access the Access Controller.
- **Blocklist**: The IP/MAC addresses on the blocklist cannot access the Access Controller.

Step 4 Click **Add** to enter the IP information.

Figure 2-75 Add IP information

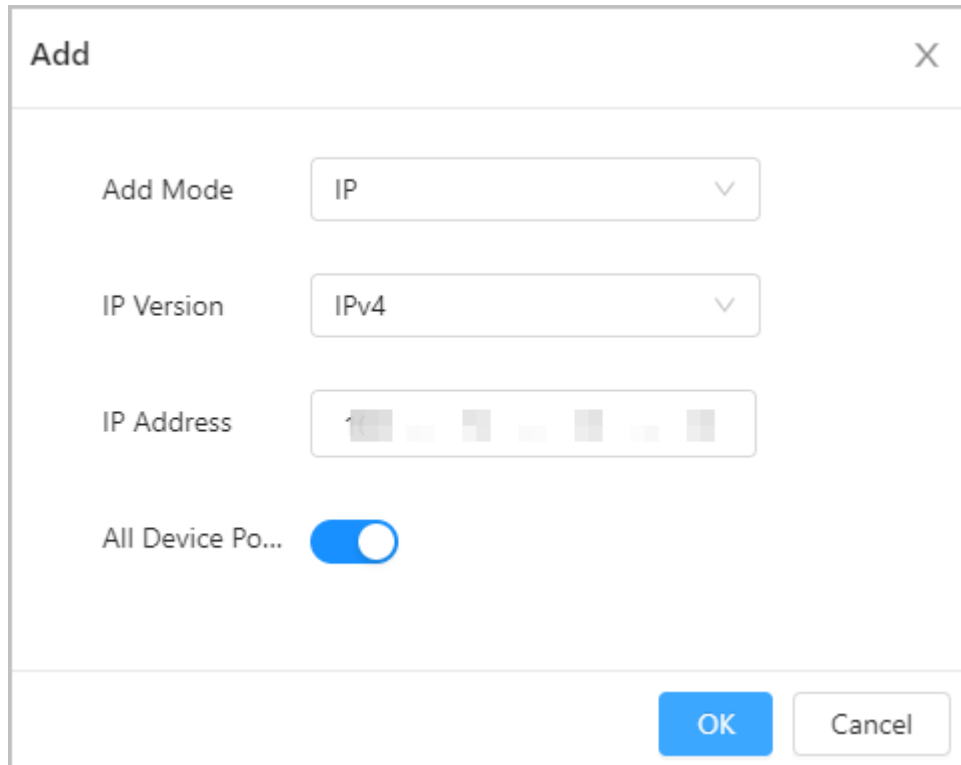A dialog box titled "Add" with a close button (X) in the top right corner. It contains four fields: "Add Mode" with a dropdown menu showing "IP", "IP Version" with a dropdown menu showing "IPv4", "IP Address" with a field containing six gray squares, and "All Device Po..." with a blue toggle switch. At the bottom right are "OK" and "Cancel" buttons.

Add

Add Mode IP

IP Version IPv4



IP Address

All Device Po... ☒

OK Cancel

Step 5 Click **OK**.

Related Operations

- Click  to edit the IP information.
- Click  to delete the IP address.

2.2.23.3.2 Configuring Account Lockout

If the incorrect password is entered for a defined number of times, the account will be locked.

Procedure

Step 1 Select **Security** > **Attack Defense** > **Account Lockout**.

Step 2 Enter the number of login attempts and the time the administrator account and ONVIF user will be locked for.

- Login attempt: The limit of login attempts. If the incorrect password is entered for a defined number of times, the account will be locked.
- Lock time: The duration during which you cannot log in after the account is locked.

Figure 2-76 Account lockout

Device Account

Login Attempt

5time(s) ▼

Lock Time

5

min

ONVIF User

Login Attempt

30time(s) ▼

Lock Time

5

min

Apply

Refresh

Default

Step 3 Click **Apply**.

2.2.23.3.3 Configuring Anti-DoS Attack

You can enable **SYN Flood Attack Defense** and **ICMP Flood Attack Defense** to defend the Access Controller against Dos attacks.

Procedure

Step 1 Select **Security** > **Attack Defense** > **Anti-DoS Attack**.

Step 2 Turn on **SYN Flood Attack Defense** or **ICMP Flood Attack Defense** to protect the Access Controller against Dos attack.

Figure 2-77 Anti-DoS attack

SYN Flood Attack Defense

☐

An attacker might send out repeated SYN messages to the device, leaving many half-open TCP connections on the device, which will make the device crash. When hit by an SYN flood attack, the device will defend itself by discarding the first message.

ICMP Flood Attack Defense

☐

An attacker might send out an abnormally large number of ICMP packets to the device, which will use up all computing resources and thus make the device crash. When hit by an ICMP flood attack, the device will defend itself by using the ICMP message filtering tactic.

Apply

Refresh

Default

Step 3 Click **Apply**.

2.2.23.4 Installing Device Certificate

Create a certificate or upload an authenticated certificate, and then you can log in through HTTPS on your computer.

2.2.23.4.1 Creating Certificate

Create a certificate for the Access Controller.

Procedure

- Step 1 Select **Security** > **CA Certificate** > **Device Certificate**.
- Step 2 Select **Install Device Certificate**.
- Step 3 Select **Create Certificate**, and click **Next**.
- Step 4 Enter the certificate information.

Figure 2-78 Certificate information

Step 2: Fill in certificate information.

Custom Name

IP/Domain Name

Organization Unit

Organization

Validity Period

Days (1~5000)

Region

Province

City Name

Back

Create and install certificate

Cancel



The name of region cannot exceed 2 characters. We recommend entering the abbreviation of the name of the region.

Step 5 Click **Create and install certificate**.

The newly installed certificate is displayed on the **Device Certificate** page after the certificate is successfully installed.

Related Operations

- Click **Enter Edit Mode** on the **Device Certificate** page to edit the name of the certificate.
- Click  to download the certificate.
- Click  to delete the certificate.

2.2.23.4.2 Applying for and Importing CA Certificate

Import the third-party CA certificate to the Access Controller.

Procedure


- Step 1** Select **Security** > **CA Certificate** > **Device Certificate**.
- Step 2** Click **Install Device Certificate**.

Step 3 Select **Apply for CA Certificate and Import (Recommended)** , and click **Next**.

Step 4 Enter the certificate information.

- IP/Domain name: the IP address or domain name of the Access Controller.
- Region: The name of region must not exceed 3 characters. We recommend you enter the abbreviation of region name.

Figure 2-79 Certificate information (2)

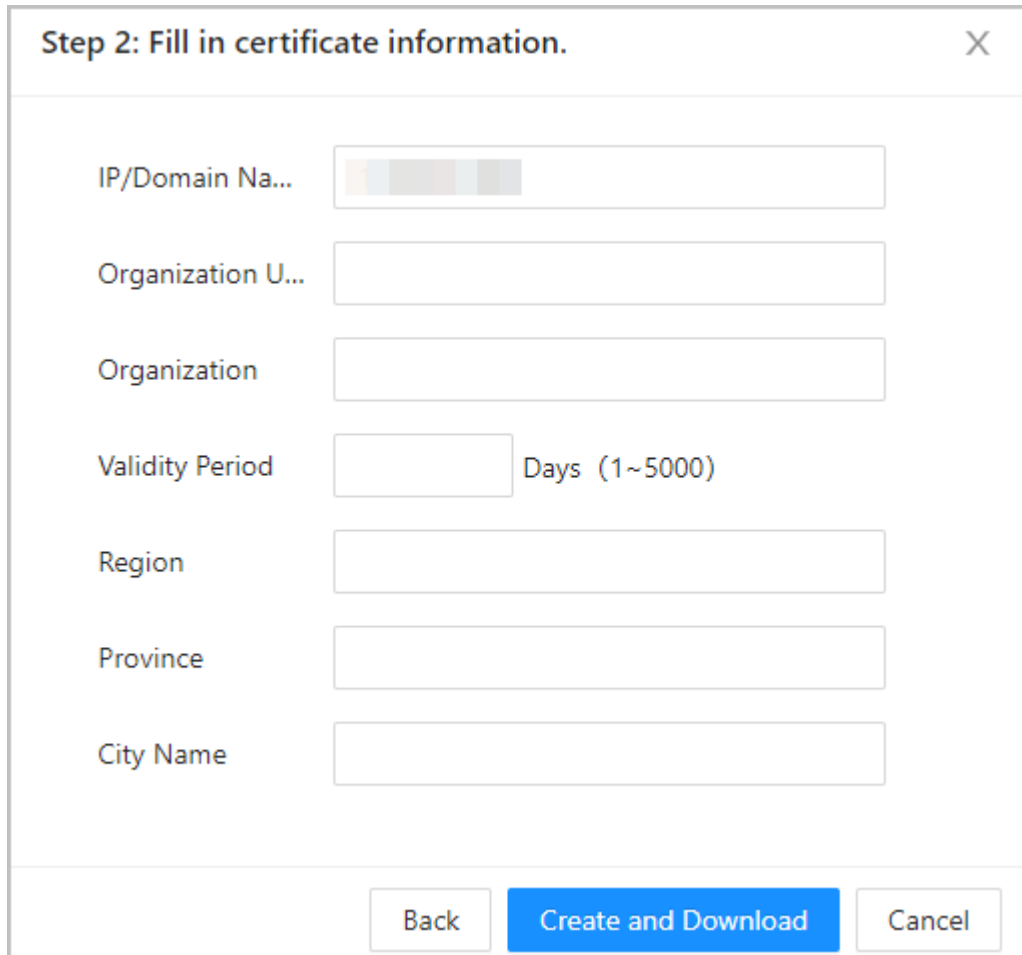

Step 2: Fill in certificate information.

IP/Domain Na...

Organization U...

Organization

Validity Period Days (1~5000)

Region

Province

City Name

Step 5 Click **Create and Download**.

Save the request file to your computer.

Step 6 Apply to a third-party CA authority for the certificate by using the request file.

Step 7 Import the signed CA certificate.



1. Save the CA certificate to your computer.
2. Click **Installing Device Certificate**.
3. Click **Browse** to select the CA certificate.
4. Click **Import and Install**.

The newly installed certificate is displayed on the **Device Certificate** page after the certificate is successfully installed.

- Click **Recreate** to create the request file again.
- Click **Import Later** to import the certificate at another time.

Related Operations

- Click **Enter Edit Mode** on the **Device Certificate** page to edit the name of the certificate.

- Click  to download the certificate.
- Click  to delete the certificate.


2.2.23.4.3 Installing Existing Certificate

If you already have a certificate and private key file, import the certificate and private key file.

Procedure

- Step 1** Select **Security** > **CA Certificate** > **Device Certificate**.
- Step 2** Click **Install Device Certificate**.
- Step 3** Select **Install Existing Certificate**, and click **Next**.
- Step 4** Click **Browse** to select the certificate and private key file, and enter the private key password.

Figure 2-80 Certificate and private key

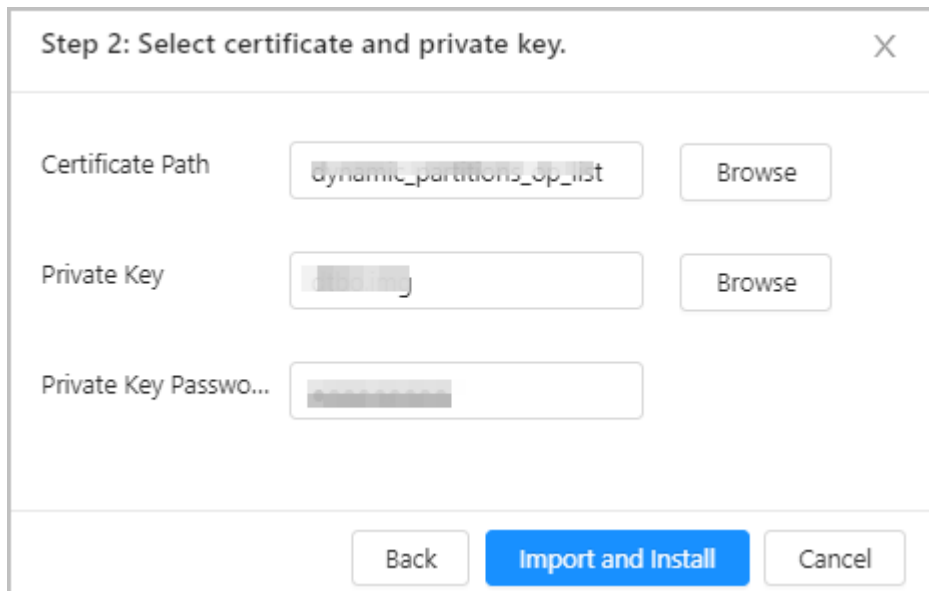

- Step 5** Click **Import and Install**.

The newly installed certificate is displayed on the **Device Certificate** page after the certificate is successfully installed.

Related Operations

- Click **Enter Edit Mode** on the **Device Certificate** page to edit the name of the certificate.
- Click  to download the certificate.
- Click  to delete the certificate.

2.2.23.5 Installing the Trusted CA Certificate

A trusted CA certificate is a digital certificate that is used for validating the identities of websites and servers. For example, when 802.1x protocol is used, the CA certificate for switches is required to authenticate its identity.


Background Information

802.1X is a network authentication protocol that opens ports for network access when an organization authenticates a user's identity and authorizes them access to the network.

Procedure

- Step 1** Select **Security** > **CA Certificate** > **Trusted CA Certificates**.
- Step 2** Select **Install Trusted Certificate**.
- Step 3** Click **Browse** to select the trusted certificate.

Figure 2-81 Install the trusted certificate

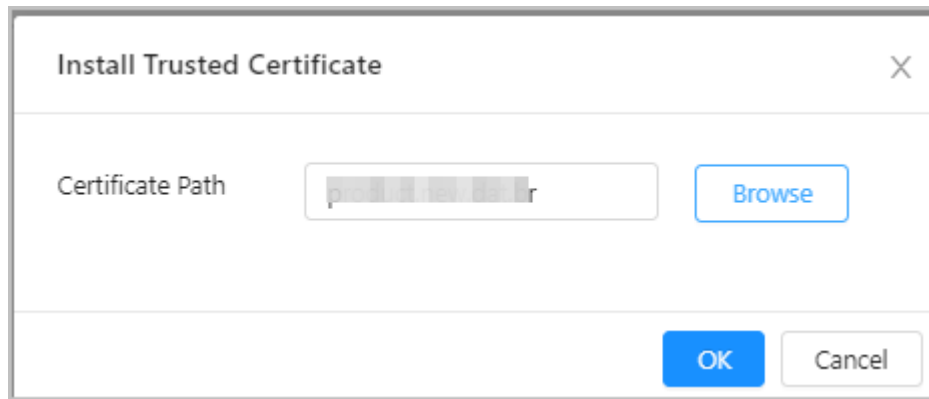

- Step 4** Click **OK**.

The newly installed certificate is displayed on the **Trusted CA Certificates** page after the certificate is successfully installed.

Related Operations


- Click **Enter Edit Mode** on the **Device Certificate** page to edit the name of the certificate.
- Click  to download the certificate.
- Click  to delete the certificate.

2.2.23.6 Security Warning

Procedure

- Step 1** Select **Security** > **CA Certificate** > **Security Warning**.
- Step 2** Enable the security warning function.
- Step 3** Select the monitoring items.

Figure 2-82 Security warning

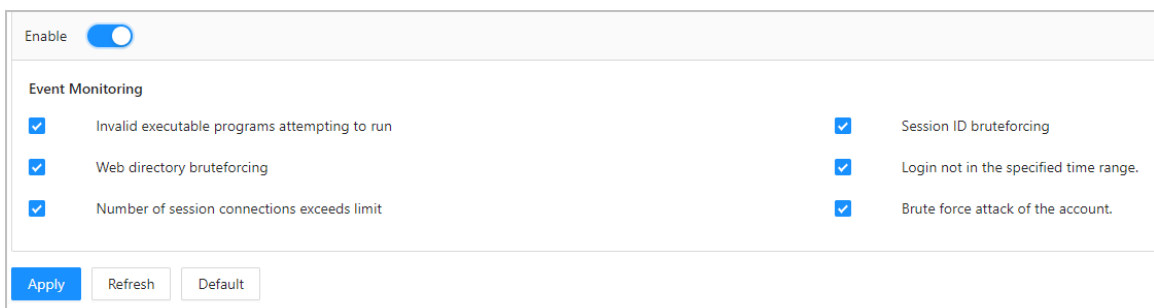

- Step 4** Click **Apply**.

2.3 Configurations of Sub Controller

You can log in to the webpage of the sub controller to configure it locally.

2.3.1 Initialization

Initialize the sub controller when you log in to the webpage for the first time or after the sub controller is restored to its factory default settings. For details on how to initialize the sub controller, see "2.2.2 Initialization".


2.3.2 Logging In

Set the Access Control to sub controller while going through the login wizard. For details, see "2.2.3 Logging In".

2.3.3 Home Page

The webpage of the sub controller only includes **Local Device Config** and **Reporting** menu. For details, see "2.2.21 Local Device Configurations (Optional)" and "2.2.22 Viewing Records".

Figure 2-83 Home page

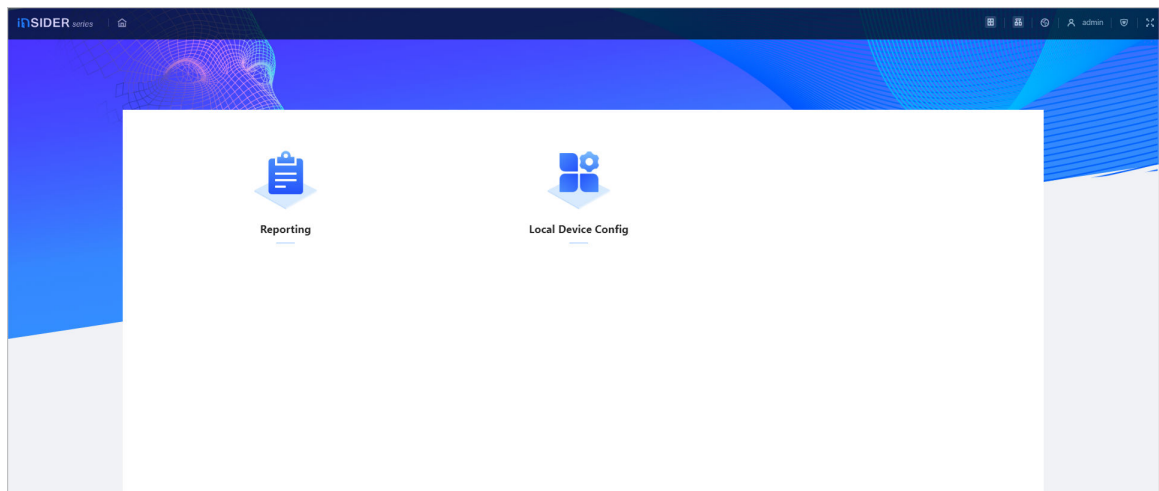


3 Smart PSS Lite-Sub Controllers

3.1 Networking Diagram

The sub controllers are added to a standalone management platform, such as SmartPSS Lite. You can manage all sub controllers through SmartPSS Lite.

Figure 3-1 Networking Diagram

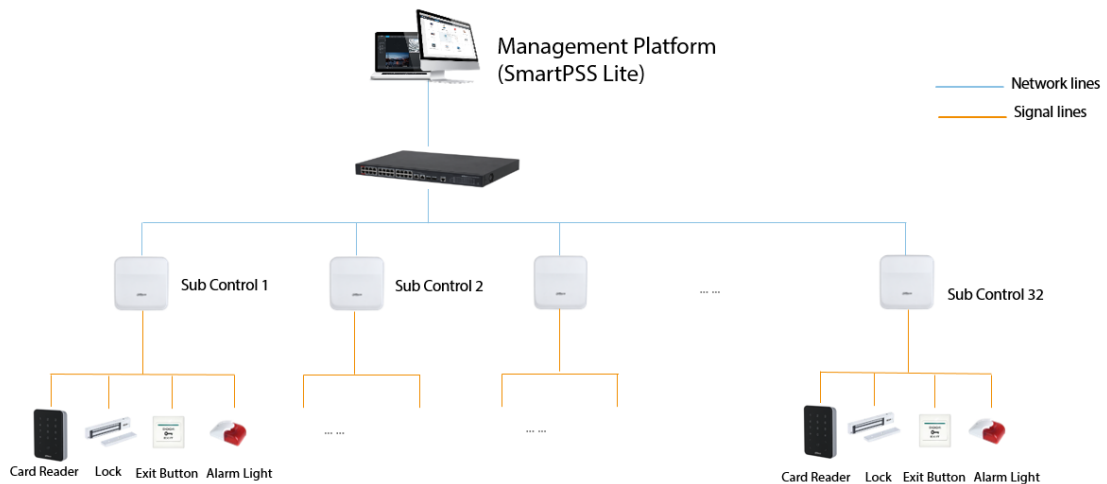

3.2 Configurations on SmartPSS Lite

Add sub controllers to SmartPSS Lite and configure them on the platform. For details, see the user's manual of SmartPSS Lite.

3.3 Configurations on Sub Controller

For details, see "2.3 Configurations of Sub Controller".

Appendix 1 Security Commitment and Recommendation

Dahua Vision Technology Co., Ltd. (hereinafter referred to as "Dahua") attaches great importance to cybersecurity and privacy protection, and continues to invest special funds to comprehensively improve the security awareness and capabilities of Dahua employees and provide adequate security for products. Dahua has established a professional security team to provide full life cycle security empowerment and control for product design, development, testing, production, delivery and maintenance. While adhering to the principle of minimizing data collection, minimizing services, prohibiting backdoor implantation, and removing unnecessary and insecure services (such as Telnet), Dahua products continue to introduce innovative security technologies, and strive to improve the product security assurance capabilities, providing global users with security alarm and 24/7 security incident response services to better protect users' security rights and interests. At the same time, Dahua encourages users, partners, suppliers, government agencies, industry organizations and independent researchers to report any potential risks or vulnerabilities discovered on Dahua devices to Dahua PSIRT, for specific reporting methods, please refer to the cyber security section of Dahua official website.

Product security requires not only the continuous attention and efforts of manufacturers in R&D, production, and delivery, but also the active participation of users that can help improve the environment and methods of product usage, so as to better ensure the security of products after they are put into use. For this reason, we recommend that users safely use the device, including but not limited to:

Account Management

1. Use complex passwords

Please refer to the following suggestions to set passwords:

- The length should not be less than 8 characters;
- Include at least two types of characters: upper and lower case letters, numbers and symbols;
- Do not contain the account name or the account name in reverse order;
- Do not use continuous characters, such as 123, abc, etc.;
- Do not use repeating characters, such as 111, aaa, etc.

2. Change passwords periodically

It is recommended to periodically change the device password to reduce the risk of being guessed or cracked.

3. Allocate accounts and permissions appropriately

Appropriately add users based on service and management requirements and assign minimum permission sets to users.

4. Enable account lockout function

The account lockout function is enabled by default. You are advised to keep it enabled to protect account security. After multiple failed password attempts, the corresponding account and source IP address will be locked.

5. Set and update password reset information in a timely manner

Dahua device supports password reset function. To reduce the risk of this function being used by threat actors, if there is any change in the information, please modify it in time. When setting security questions, it is recommended not to use easily guessed answers.

Service Configuration

1. Enable HTTPS

It is recommended that you enable HTTPS to access Web services through secure channels.

2. Encrypted transmission of audio and video

If your audio and video data contents are very important or sensitive, we recommend you to use encrypted transmission function in order to reduce the risk of your audio and video data being eavesdropped during transmission.

3. Turn off non-essential services and use safe mode

If not needed, it is recommended to turn off some services such as SSH, SNMP, SMTP, UPnP, AP hotspot etc., to reduce the attack surfaces.

If necessary, it is highly recommended to choose safe modes, including but not limited to the following services:

- SNMP: Choose SNMP v3, and set up strong encryption and authentication passwords.
- SMTP: Choose TLS to access mailbox server.
- FTP: Choose SFTP, and set up complex passwords.
- AP hotspot: Choose WPA2-PSK encryption mode, and set up complex passwords.

4. Change HTTP and other default service ports

It is recommended that you change the default port of HTTP and other services to any port between 1024 and 65535 to reduce the risk of being guessed by threat actors.

Network Configuration

1. Enable Allow list

It is recommended that you turn on the allow list function, and only allow IP in the allow list to access the device. Therefore, please be sure to add your computer IP address and supporting device IP address to the allow list.

2. MAC address binding

It is recommended that you bind the IP address of the gateway to the MAC address on the device to reduce the risk of ARP spoofing.

3. Build a secure network environment

In order to better ensure the security of devices and reduce potential cyber risks, the following are recommended:

- Disable the port mapping function of the router to avoid direct access to the intranet devices from external network;
- According to the actual network needs, partition the network: if there is no communication demand between the two subnets, it is recommended to use VLAN, gateway and other methods to partition the network to achieve network isolation;
- Establish 802.1x access authentication system to reduce the risk of illegal terminal access to the private network.

Security Auditing

1. Check online users

It is recommended to check online users regularly to identify illegal users.

2. Check device log

By viewing logs, you can learn about the IP addresses that attempt to log in to the device and key operations of the logged users.

3. **Configure network log**

Due to the limited storage capacity of devices, the stored log is limited. If you need to save the log for a long time, it is recommended to enable the network log function to ensure that the critical logs are synchronized to the network log server for tracing.

Software Security

1. **Update firmware in time**

According to the industry standard operating specifications, the firmware of devices needs to be updated to the latest version in time in order to ensure that the device has the latest functions and security. If the device is connected to the public network, it is recommended to enable the online upgrade automatic detection function, so as to obtain the firmware update information released by the manufacturer in a timely manner.

2. **Update client software in time**

We recommend you to download and use the latest client software.

Physical Protection

It is recommended that you carry out physical protection for devices (especially storage devices), such as placing the device in a dedicated machine room and cabinet, and having access control and key management in place to prevent unauthorized personnel from damaging hardware and other peripheral equipment (e.g. USB flash disk, serial port).

ENABLING A SMARTER SOCIETY AND BETTER LIVING

ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.

Address: No. 1399, Binxing Road, Binjiang District, Hangzhou, P. R. China | Website: www.dahuasecurity.com | Postcode: 310053

Email: dhoverseas@dhvisiontech.com | Tel: +86-571-87688888 28933188