

# ARA715

Serial Converter



- Used to convert RS-232 signals from the serial port into RS-485 signals.

### Series Overview

The Serial Port Module is specifically designed to be used with Hub 2, enabling seamless connectivity to the RS-485 I/O expansion module. This enhancement facilitates wired input and output expansion capabilities.


### Technical Specification

Port	
RS-232	1 × RS-232 input port
RS-485	1 × RS-485 output port
Function	
Indicator Light	1 power indicator
General	
Power Supply	Powered by the RS-232 port of Hub 2
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	10%–90% (RH)
Product Dimensions	50 mm × 12.7 mm × 7.2 mm (1.97" × 0.50" × 0.28")
Net Weight	5.21 g (0.01 lb)
Gross Weight	50 g (0.11 lb)
Certifications	CE
Storage Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Storage Humidity	10%–90% (RH)
Packaging Dimensions	106 mm × 90 mm × 45 mm (4.17" × 3.54" × 1.77") (L × W × H, 1 in inner carton) 339 mm × 291 mm × 261 mm (13.35" × 11.46" × 10.28") (L × W × H, carton)


### Ordering Information

Type	Model	Description
Alarm Accessory	ARA715	Serial Converter

### Installation

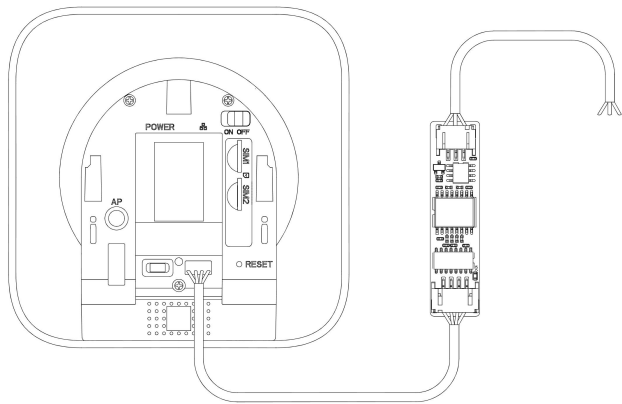

Dimensions (mm[inch])

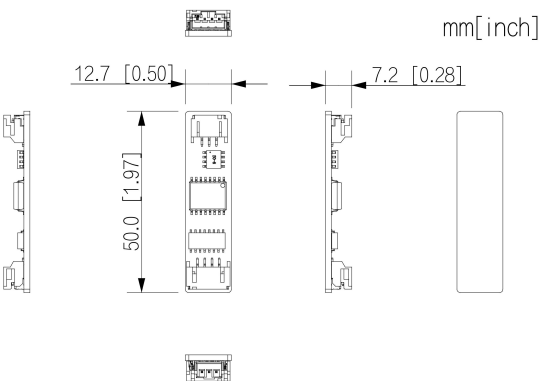

Application

