

DH-HAC-D1A51-U

5MP IR HDCVI Fixed-focal Dome Camera



* The parameters and datasheets below can only be applied to A51-S3 series.

- Max 25 fps@5MP (16:9 video output)
- Smart IR Illumination.
- 25 m illumination distance.
- 3.6 mm fixed lens (2.8 mm optional).
- CVI/CVBS/AHD/TVI switchable.



Series Overview

The Cooper Series offers simple and highly cost-effective HDCVI solutions. It provides 24/7 reliable monitoring with high-quality image performance, saving cost on both material and labor force. It is also designed and built to the specific standards of Dahua.

Functions

Smart IR Illumination

With its IR illumination, the camera provides optimal performance in low light conditions, ensuring uniformity in the brightness of B/W images. Through its smart IR technology, the camera also compensates for the distance of targets by adjusting the intensity of its IR LEDs, preventing overexposure of images as targets move closer to the camera.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

* Audio input is available for select HDCVI camera models.

Long Distance Transmission

HDCVI technology provides long distance transmission in real time without transmission loss. It supports transmission distances up to 700 m for 2-MP/5-MP/8-MP HD videos through coaxial cables, and up to 300 m through UTP cables. The results were obtained and verified through rigorous testing in Dahua's test laboratory.

Simplicity

HDCVI technology inherits the simplicity of traditional analog surveillance systems, making it a great mechanism for protecting your valuables. HDCVI can be upgraded from the traditional analog system without replacing the existing coaxial cabling. Its plug and play design enables it to produce high-definition videos during surveillance without the hassle of configuring a network.

Multi-language OSD

The OSD offers multiple functions to meet the many requirements of a monitoring scene, such as backlight mode, day/night mode, white balance, privacy mask, and motion detection. 11 languages are available for OSD: Chinese, English, French, German, Spanish, Portuguese, Italian, Japanese, Korean, Russian and Polish.

Technical Specification

| | |
|----------------------------|---|
| Camera | |
| Image Sensor | 5 MP CMOS |
| Max. Resolution | 2880 (H) × 1620 (V) |
| Scanning System | Progressive |
| Electronic Shutter Speed | PAL: 1/25 s–1/100,000 s NTSC: 1/30 s–1/100,000 s |
| Min. Illumination | 0.02 lux@F2.0 (Color, 30 IRE) 0.002 lux@F2.0 (B/W, 30 IRE) 0 lux (Illuminator on) |
| S/N Ratio | >65 dB |
| Illumination Distance | IR: 25 m (82.02 ft) |
| Illuminator On/Off Control | Auto/Manual |
| Illuminator Number | 3 (IR light) |
| Angle Adjustment | Pan: 0°–355° Tilt: 0°–75° Rotation: 0°–355° |

| Lens | | | | | |
|----------------------|---|---|------------------------|-----------------------|----------------------|
| Lens Type | | Fixed-focal | | | |
| Lens Mount | | M12 | | | |
| Focal Length | | 2.8 mm; 3.6 mm | | | |
| Max. Aperture | | F2.0 | | | |
| Field of View | | 2.8 mm: H: 105.5°; V: 56.5°; D: 125.3° 3.6 mm: H: 86°; V: 46.1°; D: 104.3° | | | |
| Close Focus Distance | | 2.8 mm: 1.0 m (3.28 ft) 3.6 mm: 1.4 m (4.59 ft) | | | |
| DORI Distance | Lens | Detect | Observe | Recognize | Identify |
| | 2.8 mm | 66.0 m (216.54 ft) | 26.4 m (86.61 ft) | 13.2 m (43.31 ft) | 6.6 m (21.65 ft) |
| | 3.6 mm | 79.4 m (260.50 ft) | 31.8 m (104.33 ft) | 15.9 m (52.17 ft) | 7.9 m (25.92 ft) |
| | *DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool. | | | | |

Video

| | |
|------------------|---|
| Video Frame Rate | CVI: PAL: 5M@25 fps; 5M@12.5 fps; 4M@25 fps; 1080p@25 fps NTSC: 5M@25 fps; 5M@20 fps; 5M@10 fps; 4M@30 fps; 1080p@30 fps AHD: PAL: 4M@25 fps NTSC: 4M@30 fps TVI: PAL: 5M 16:9@20 fps NTSC: 5M 16:9@20 fps CVBS: PAL: 960H NTSC: 960H |
|------------------|---|

| | |
|-------------------|--|
| Resolution | 5M (2880 × 1620); 4M (2560 × 1440); 1080p (1920 × 1080); 960H (960 × 576/960 × 480); TVI 5M 16:9 (2960 × 1665) |
| Day/Night | Auto(ICR)/Color/B/W |
| BLC | BLC; HLC; WDR |
| WDR | DWDR |
| White Balance | Auto;Area white balance |
| Gain Control | Auto |
| Noise Reduction | 2D NR |
| Illumination Mode | Smart IR |
| Mirror | Yes |
| Privacy Masking | Off/On (8 areas, rectangle) |

Certification

| | |
|----------------|--|
| Certifications | CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035; |
|----------------|--|

Port

| | |
|--------------|---|
| Video Output | Video output choices of CVI/TVI/AHD/CVBS by one BNC port (DIP Switch) |
|--------------|---|

Power

| | |
|-------------------|---------------------------|
| Power Supply | 12 VDC (±30%) |
| Power Consumption | Max 2.8 W (12 VDC, IR on) |

Environment

| | |
|-----------------------|--------------------------------------|
| Operating Temperature | –40 °C to +60 °C (–40 °F to +140 °F) |
| Operating Humidity | <95% (RH), non-condensing |
| Storage Temperature | –40 °C to +60 °C (–40 °F to +140 °F) |
| Storage Humidity | <95% (RH), non-condensing |
| Anti-corrosion Level | Basic Protection |


Structure

| | |
|--------------------|--|
| Casing Material | Plastic |
| Product Dimensions | Φ99.1 mm × 74.1 mm (Φ3.90" × 2.92") |
| Net Weight | 0.17 kg (0.37 lb) |
| Gross Weight | 0.27 kg (0.60 lb) |
| Installation | Wall mount; ceiling mount; vertical pole mount |

Ordering Information


| | | |
|--------------|-----------------|---|
| Type | Model | Description |
| HDCVI CAMERA | DH-HAC-D1A51N-U | 5MP IR HDCVI Fixed-focal Dome Camera,NTSC |
| | DH-HAC-D1A51P-U | 5MP IR HDCVI Fixed-focal Dome Camera,PAL |

| Type | Model | Description |
|------------------------|---------------|-------------------------------|
| Accessories (Optional) | DH-PFA109 | Mount Adapter |
| | DH-PFB220C | Ceiling Mount Bracket |
| | DH-PFA151 | Corner Mount Bracket |
| | DH-PFB305W | Wall Mount Bracket |
| | DH-PFA150 | Pole Mount Bracket |
| | DH-PFB2203W | Wall Mount Bracket |
| | DH-PFA156 | Pole Mount Bracket |
| | DH-PFA13G | Junction Box |
| | DH-PFM800-4K | 1 Channel Passive HDCVI Balun |
| | DH-PFM321-EN | DC12V1A power adapter |
| | DH-PFM320D-EN | DC12V2A power adapter |
| | PFM904 | Integrated Mount Tester |

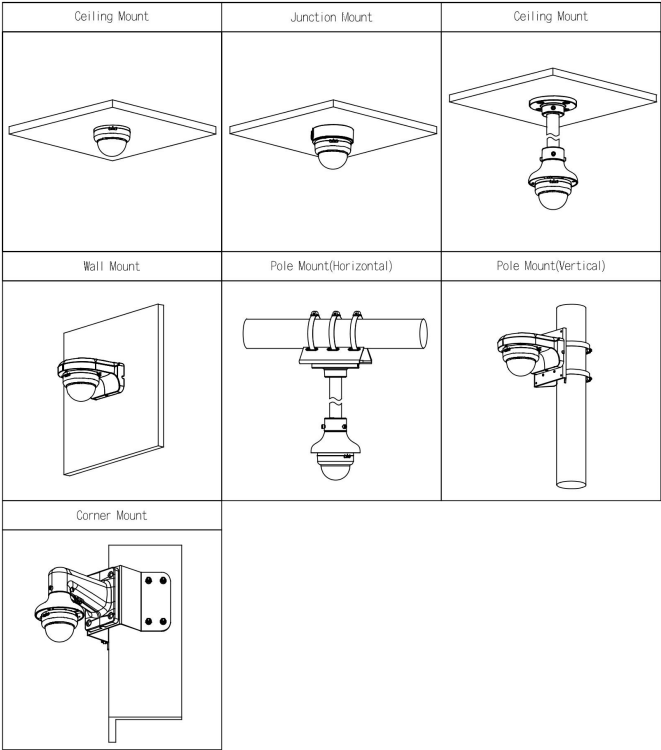

Accessories

Optional:



DH-PFA109
Mount Adapter



DH-PFA13G
Junction Box



DH-PFA150
Pole Mount Bracket




DH-PFA151
Corner Mount Bracket



DH-PFA156
Pole Mount Bracket




DH-PFB2203W
Wall Mount Bracket



DH-PFB220C
Ceiling Mount Bracket




DH-PFB305W
Wall Mount Bracket




DH-PFM320D-EN
DC12V2A power adapter



DH-PFM321-EN
DC12V1A power adapter



DH-PFM800-4K
1 Channel Passive HDCVI
Balun



PFM904
Integrated Mount Tester

Dimensions (mm[inch])

