



3+3MP Outdoor Wi-Fi Dual-Lens Pan & Tilt Camera

DH-P3D-3F-PV



Series Overview

The Picoo Dual Series, which is under the Dahua Wireless series, consists of cameras equipped with both fixed lens and PT lens. This unique combination allows for simultaneous live monitoring of two areas, providing coverage from multiple angles. Leveraging its dual lenses, the camera performs smart detection using advanced functions like AI human and vehicle detection, effectively minimizing false alarms. Additionally, with the assistance of the PT lens, the camera has the capability to automatically track moving targets. The camera also triggers sound and light alarms upon detecting an intrusion, promptly sending notifications to the mobile client to ensure you remain up to date regardless of your location. These cameras are widely utilized in small-scale scenes such as shops and restaurants.



Dual 2K

Clear images with sharp details



Dual-lens, Double Vision

One camera, double the protection



Linkage Tracking (2.8mm+6mm only)

Synchronized fixed lens and PT lens monitoring ensures complete vigilance in security



Dual Channel Smart Detection

Smart detection for both lenses to focus on what matters



AI Human Detection

Focuses on what matters and reduces false alarms



AI Vehicle Detection

Focuses on what matters and reduces false alarms



Tap and View (2.8mm+6mm only)

Tap anywhere on the close-up view in the App, and the PT lens will



IP66 Protection

Withstands harsh environments



Auto Tracking

Automatic tracking of targets



Sound and Light Alarm

Provides instant alarms to deter intruders



Smart Dual Light

Captures color details for post-event review



Micro SD Card

Low-cost storage



Bluetooth Pairing

Fast pairing with Bluetooth




Wi-Fi 6

The perfect integration of speed and anti-interference



H.265

Advanced H.265 Compression Technology

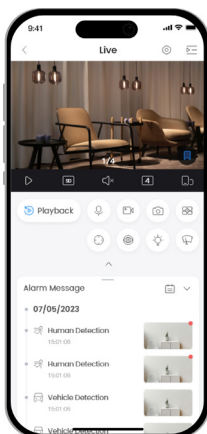

Upgrade Your Experience with DMSS

Dahua Mobile Security Surveillance (DMSS) is a professional remote surveillance management platform that offers remote monitoring, device migration, and sharing. When connected to the internet, the platform provides real-time alerts to improve surveillance efficiency and grant flexibility in security management.





Specifications

Camera (2.8 mm+6 mm)

Fixed Lens

Image Sensor	1/2.8" CMOS
Max. Resolution	2304 (H) × 1296 (V)
Illumination Distance	Up to 30 m (98.43 ft) (IR) Up to 20 m (65.62 ft) (Warm light)
Illuminator Number	2 (IR LED); 2 (Warm light)
Angle Adjustment	-10° to 15°
Lens Type	Fixed-focal
Focal Length	2.8 mm
Max. Aperture	F1.6
Field of View	H: 95°; V: 53°; D: 110°

PT Lens

Image Sensor	1/2.8" CMOS
Max. Resolution	2304 (H) × 1296 (V)
Illumination Distance	Up to 50 m (164.04 ft) (IR) Up to 40 m (131.23 ft) (Warm light)
Illuminator Number	2 (IR LED); 2 (Warm light)
Angle Adjustment	Pan: 0° to 352°; Tilt: 0° to 90°
Lens Type	Fixed-focal
Focal Length	6 mm
Max. Aperture	F1.6
Field of View	H: 53°; V: 29°; D: 62°

Camera (3.6 mm+3.6 mm)

Fixed Lens

Image Sensor	1/2.8" CMOS
Max. Resolution	2304 (H) × 1296 (V)
Illumination Distance	Up to 30 m (98.43 f) (IR) Up to 30 m (98.43 f) (Warm light)
Illuminator Number	2 (IR LED); 2 (Warm light)
Angle Adjustment	-10° to 15°
Lens Type	Fixed-focal
Focal Length	3.6mm
Max. Aperture	F1.6
Field of View	H: 86°; V: 46°; D: 103°

PT Lens

Image Sensor	1/2.8" CMOS
Max. Resolution	2304 (H) × 1296 (V)
Illumination Distance	Up to 30 m (98.43 f) (IR) Up to 30 m (98.43 f) (Warm light)
Illuminator Number	2 (IR LED); 2 (Warm light)
Angle Adjustment	Pan: 0° to 352°; Tilt: 0° to 90°
Lens Type	Fixed-focal
Focal Length	3.6mm
Max. Aperture	F1.6
Field of View	H: 86°; V: 46°; D: 103°

Intelligence

Human Detection	Yes
Vehicle Detection	Yes

Audio and Video

Video Compression	H.265
Video Frame Rate	Main stream: 2304 × 1296@15 fps sub stream: 640 × 360@15 fps *The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity.
Video Bit Rate	H.265: 512 kbps–4096 kbps
Day/Night	Auto(ICR)/Color/B/W
WDR	DWDR
Motion Detection	Yes
Image Rotation	0°/180°
Built-in MIC	Yes, built-in Mic
Built-in Speaker	Yes, built-in speaker
Audio Compression	G.711a

Network

Network Port	RJ-45 (10/100 Base-T)
Wi-Fi	IEEE 802.11b/g/n/ax 2.4000~2.4835 GHz, 2.4G, ≤20dBm
Wi-Fi Pairing	Bluetooth pairing
Storage	Micro SD card (support max. 256 GB)
Management Software	DMSS
Mobile Client	iOS;Android

General

Certifications	CE
Power Supply	12 VDC
Power Consumption	Basic: 2.3 W Max.: 10 W (pulling stream+ IR + siren and light active deterrence)
Operating Temperature	−30 °C to +50 °C (−22 °F to +122 °F)
Operating Humidity	≤95% (RH), non-condensing
Protection	IP66
Casing Material	Plastic
Product Dimensions	159.4 mm × 119.1 mm × 210 mm (6.28" × 4.69" × 8.27") (L × W × H)
Net Weight	585 g (1.29 lb)

What's in the box

