

DH-PFA2600X

Universal Joint



Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, and works in temperatures ranging from –40 °C to +60 °C (–40 °F to +140 °F) and in environments with a relative humidity of less than 90%.

Technical Specification

Structure

Casing Material	SPCC
Product Dimensions	80.0 mm × 60.0 mm × 79.0 mm (3.15" × 2.36" × 3.11") (L × W × H)
Appearance Color	White
Net Weight	0.24 kg (0.53 lb)
Gross Weight	0.27 kg (0.60 lb)
Load Bearing	2.0 kg (4.41 lb)
Installation	Plane mount
Adjustable Inclination Angle	–60° to +60°
Applicable Model	Please see "Camera Accessories Selection"

- Built of SPCC material.
- Suitable for a variety of cameras and is elegant.
- Supports being adjusted to multiple angles to suit the needs of various installation locations.




Packaging Dimensions	89 mm × 69 mm × 90 mm (3.50" × 2.72" × 3.54") (L × M × H)
Environment	
Operating Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Operating Humidity	< 90% (RH)
Storage Temperature	–40 °C to +60 °C (–40 °F to +140 °F)
Storage Humidity	10%–90% (RH)
Anti-corrosion Level	Basic Protection *The products are designed for general use and are applicable even in areas with no specific requirements for anti-corrosion protection.


Ordering Information

Type	Model	Description
Camera Mount	DH-PFA2600X	Universal Joint

Installation

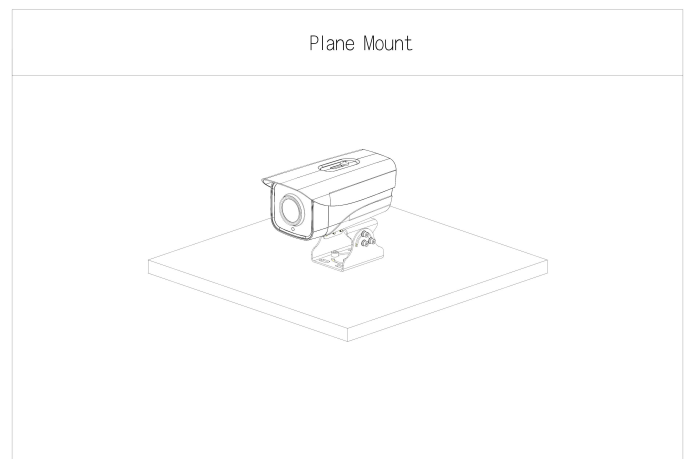

Dimensions (mm[inch])

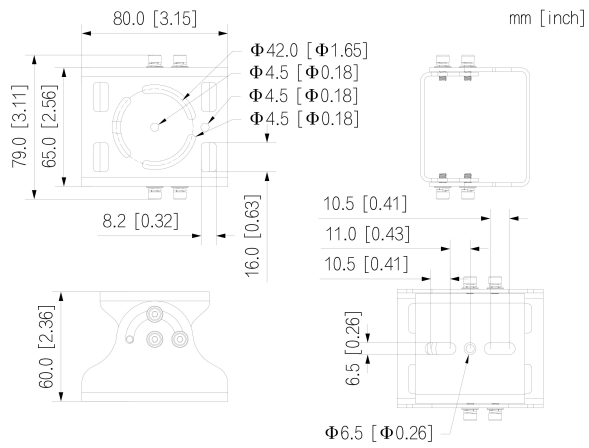

Package Information

- Universal joint $\times 1$
- 1/4-20 $\times$ 8 UNC screws $\times 2$
- M6 $\times$ 8 screws $\times 2$
- M4 $\times$ 10 screws $\times 2$
- S3.0 wrench $\times 1$