

DH-PFB2400W

Wall Mount Bracket



Series Overview

The Mounting Bracket works with front-end services, supporting installation methods such as wall mount, pole mount, corner mount and in-ceiling mount. Select brackets are designed to suit complex scenes, making them convenient to use in environments with high temperatures, humidity, frequent vibrations, and in locations that are highly corrosive. These highly reliable brackets are easy to install and use.

Scene

Ideal for mounting cameras, and works in temperatures ranging from -40 °C to +60 °C (-40 °F to +140 °F) and in environments with a relative humidity of less than 90%.

Technical Specification

Structure

Casing Material	Aluminum alloy	
Product Dimensions	$170.0~\text{mm} \times 164.0~\text{mm} \times 113.4~\text{mm}$ (6.69" \times 6.46" \times 4.46") (L \times W \times H)	
Appearance Color	White	
Net Weight	0.39 kg (0.86 lb)	
Gross Weight	0.51 kg (1.12 lb)	
Load Bearing	1.0 kg (2.2 lb)	
Installation	Wall mount	
Screw Thread Type	G3/4	
Applicable Model	Please see "Camera Accessories Selection"	
Packaging Dimensions	188 mm × 187 mm × 119 mm (7.4" × 7.36" × 4.69") (L × W × H)	

- · Built of aluminum alloy and is cost-effective.
- · Matched with particular cameras, beautiful and elegant designed.








Environment

Operating Temperature	-40 °C to +60 °C (-40 °F to +140 °F)	
Operating Humidity	<90% (RH)	
Storage Temperature	-40 °C to +60 °C (-40 °F to +140 °F)	
Storage Humidity	10%-90% (RH)	
Anti-corrosion Level	Basic Protection *The products are designed for general use and are applicable even in areas with no specific requirements for anti-corrosion protection.	


Ordering Information

-		
Туре	Model	Description
Camera Mount	DH-PFB2400W	Wall Mount Bracket

Installation

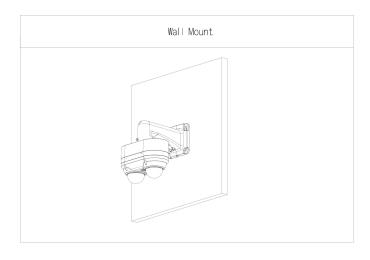

Dimensions (mm[inch])



Package Information

- · Wall mount bracket
- ST4 \times 25 screws \times 4
- · Plastic expansion bolt × 4
- M4 × 12 screws × 2
- · S3.0 wrench × 1