

# DHI-ICS-D0120E-I1A

## Overseas DH DC Charging Station



### Series Overview

DC Charging Station is designed to meet the highest standards of performance and convenience. Seamlessly integrating advanced technology, it offers a variety of user-friendly activation methods such as swiping a card, scanning a QR code, scheduling a charge, or using Plug and Play. It also supports both 4G and Ethernet connectivity and is compatible with OCPP 1.6J. This station ensures unparalleled flexibility and compatibility for modern charging networks.

### Functions

#### Intelligent Human-Computer Interaction

Includes a 10.1-inch high-brightness touch screen with a brightness level of 800 nits, which enhances human-computer interaction for an exceptional user experience. Additionally, you can customize the UI to better suit your preferences.

#### Wide Voltage Range

The output voltage ranges from 200–1,000 VDC, perfectly accommodating the charging requirements for 800 V systems.

#### Intelligent Power Allocation

Dynamically adjusts the output power to provide the optimal charging solution based on your vehicle's Battery Management System (BMS) requirements to enhance charging efficiency. Moreover, the charger can allocate power to support multiple vehicles simultaneously when both charging connectors are used.

#### Intelligent Indicator

Offers multiple indicator color, allowing you to distinguish the device status with ease.

- It operates on a three-phase 400 V supply, ensuring efficient charging performance.
- Developed with an elegant silver curved surface and modern design that enhances its aesthetic appeal.
- Charging initiation is convenient, with options to swipe the IC card, scan the QR code, enter a VIN code, or utilize Plug and Play functionality.
- Offers versatile charging capabilities, including single-cable charging and simultaneous dual-cable charging.
- Supports management through a dedicated app, allowing for remote updates and incorporates various protective functions for enhanced security.
- The charger is built to withstand challenging environments, featuring an IP55 and IK10 rating, with the screen area rated at IK08. It is highly suitable for both indoor and outdoor installations.
- Designed to provide a convenient and secure charging experience, whether functioning as a standalone unit or as part of a networked system.

#### Auto Adjustment of Output Power

In extreme environments, the device intelligently adjusts its output power based on factors such as environment temperature, fan operations, and required power. This increases the efficiency and effectiveness of charging sessions even in the most challenging conditions.

#### Auto Noise Reduction

The fan automatically adjusts its noise output based on the environment temperature and the working temperature of its modules.

#### Intelligent Operation and Maintenance

Offers protection against 10 different types of risks and features error alarms, OTA update, remote control and restart capabilities for enhanced reliability and convenience.

### Scene

Widely applicable to a variety of locations such as bus stations, public fast charging stations, industrial parks, enterprises, institutions, commercial complexes, as well as vehicle manufacturers.

Technical Specification

|                                               |                                                  |
|-----------------------------------------------|--------------------------------------------------|
| Electrical                                    |                                                  |
| Rated Input Voltage                           | 400 VAC                                          |
| Max. Output Power                             | 120 kW                                           |
| Maximum Charging Current for Single Connector | 250 A                                            |
| Output Voltage Range                          | 200–1,000 VDC                                    |
| Constant Power Range                          | 300–1,000 VDC                                    |
| Max. Charging Current                         | 400 A                                            |
| Harmonic Wave                                 | ≤ 5%                                             |
| Power Factor                                  | 0.99 (Full load)                                 |
| Efficiency                                    | 96.8%, the highest efficiency during a full load |
| Standby Power Consumption                     | ≤30 W                                            |
| Output Voltage Error                          | ≤ ±0.5%                                          |
| Output Current Error                          | ≤ ±1%                                            |
| Stabilized Voltage Accuracy                   | ≤ ±0.5%                                          |
| Stabilized Current Accuracy                   | ≤ ±1%                                            |
| Ripple Peak Value                             | ≤ ±1%                                            |
| Average Current Imbalance                     | ≤ 3%                                             |

|                                       |                                                                                                                                                             |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Basic                                 |                                                                                                                                                             |
| Charging Mode                         | Mode 4                                                                                                                                                      |
| Charging Port                         | 2 × CCS2                                                                                                                                                    |
| Communication Protocol (with Backend) | OCPP1.6J                                                                                                                                                    |
| Measurement Accuracy                  | Level 1 (Class B)                                                                                                                                           |
| Types of Protection                   | Protects against input overvoltage, undervoltage, short circuit, input overload, output overvoltage and overtemperature. It also detects insulation issues. |
| Cooling Method                        | Intelligent air cooling                                                                                                                                     |

|                           |                                                                                                   |
|---------------------------|---------------------------------------------------------------------------------------------------|
| Function                  |                                                                                                   |
| Display Screen Dimensions | 10.1-inch                                                                                         |
| Startup Method            | Scan a QR code, enter a VIN code, swipe the IC card, utilize Plug and Play or enter the password. |
| Network Connection Method | LAN, 4G, Wi-Fi                                                                                    |
| Bluetooth                 | Yes                                                                                               |
| Status Indicator Light    | Blue: Charging<br>Yellow: Device updating<br>Green: Standby<br>Red: Fault                         |

|                    |                                                                     |
|--------------------|---------------------------------------------------------------------|
| Structure          |                                                                     |
| Accessory          | Includes a cable organizer and MID meter.                           |
| Product Dimensions | 944 mm × 561.5 mm × 1,945 mm (37.17" × 22.11" × 76.57") (W × D × H) |


|                      |                                                                       |
|----------------------|-----------------------------------------------------------------------|
| Packaging Dimensions | 1,098 mm × 1,098 mm × 2,147 mm (43.23" × 43.23" × 84.53") (W × D × H) |
| Net Weight           | 202 kg (445.34 lb)                                                    |
| Gross Weight         | 222 kg (489.44 lb)                                                    |
| Cable Length         | 5 m (16.40 ft). This length includes the length of the connector.     |

|                       |                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------|
| Environment           |                                                                                                   |
| Operating Temperature | –30 °C to +55 °C (–22 °F to +131 °F)<br>Performance might be derated of temperatures exceed 50°C. |
| Storage Temperature   | –40 °C to +70 °C (–40 °F to +158 °F)                                                              |
| Operating Humidity    | 5%–95% (RH), non-condensing                                                                       |
| Operating Altitude    | ≤2,000 m (6561.68 ft)                                                                             |
| Protection            | IP55                                                                                              |
| Vandal-proof Rating   | The EV Charger is IK10, and its screen is IK08.                                                   |
| Working Noise         | ≤ 65 dB                                                                                           |

|                          |                                           |
|--------------------------|-------------------------------------------|
| External Port            |                                           |
| Power Supply System Type | 3P + N + PE                               |
| Certification            |                                           |
| Certifications           | IEC 61851-1; IEC 61851-23; IEC 61851-21-2 |

|                      |                    |                                 |
|----------------------|--------------------|---------------------------------|
| Ordering Information |                    |                                 |
| Type                 | Model              | Description                     |
| DC Charging Station  | DHI-ICS-D0120E-I1A | Overseas DH DC Charging Station |

Installation

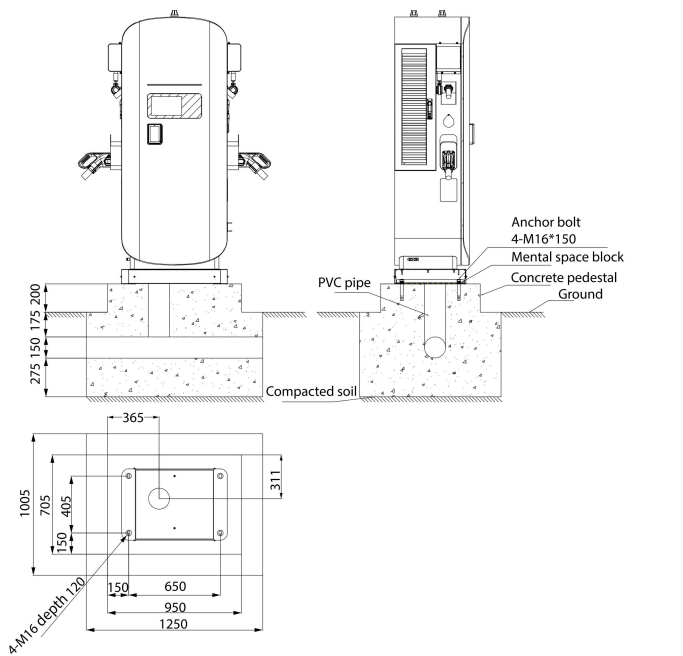

Dimensions (mm[inch])

