


DHI-IPMPGU-3203-DC12

Dahua LED Indicator

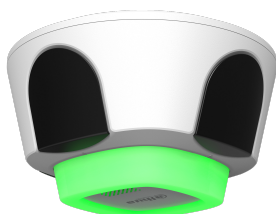

- An RS-485 external indicator light specially designed for use with parking space detectors. One indicator is assigned to each parking space.

Series Overview

The device can display the status of parking spaces using 7 different indicator colors. Highly flexible, each indicator color can be personally set to indicate a particular status for the parking space.

Functions

Seven-color Indicator

The device comes with a built-in indicator that can display the status of parking spaces in different colors.

Scene

Suitable for indoor parking lots and semi-enclosed parking garages.

Technical Specification

Basic

Indicator Light	1, 7 customizable colors (red, yellow, blue, green, cyan, white, and pink)
-----------------	--

Port

RS-485	1
--------	---

General


Power Supply	12–48 VDC
Power Consumption	< 6 W
Operating Temperature	–30 °C to +50 °C (–22 °F to +122 °F)
Storage Temperature	–35 °C to +55 °C (–31 °F to +131 °F)
Operating Humidity	10%–95% (RH), non-condensing
Storage Humidity	10%–95% (RH), non-condensing
Protection	IP54

Anti-corrosion Level	Basic Protection
Product Dimensions	200.0 mm × 200.0 mm × 131.2 mm (7.87" × 7.87" × 5.17") (L × W × H)
Packaging Dimensions	250 mm × 250 mm × 200 mm (9.84" × 9.84" × 7.87") (L × W × H)
Net Weight	0.69 kg (1.52 lb)
Gross Weight	1.43 kg (3.15 lb)
Installation	Ceiling mount; bracket mount

Ordering Information

Type	Model	Description
LED Indicator	DHI-IPMPGU-3203-DC12	Dahua LED Indicator

Installation

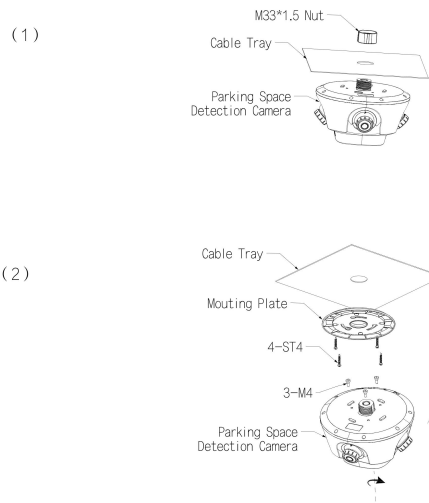

Dimensions (mm[inch])

