

# DH-IPC-HFW2449S-S-LED

## 4MP Full-color Fixed-focal Bullet Wizsense Network Camera



**WizSense**

Launched by Dahua Technology, WizSense is a series of AI products and solutions that adopt independent AI chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

### Series Overview

With advanced deep learning algorithm, Dahua WizSense 2 Series network camera supports intelligent functions, such as perimeter protection and smart motion detection. With starlight technology, this series camera provides a better image effect in the condition of low illuminance.

### Functions

#### SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.


#### Perimeter Protection

With deep learning algorithm, Dahua Perimeter Protection technology can recognize human and vehicle accurately. In restricted area (such as pedestrian area and vehicle area), the false alarms of intelligent detection based on target type (such as tripwire, intrusion, fast moving, parking detection, loitering detection and gathering detection) are largely reduced.

#### Smart H.265+ & Smart H.264+

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

- 4-MP 1/2.9" CMOS image sensor, low luminance, and high definition image.
- Outputs max. 4 MP (2688×1520)@20 fps, and supports (2560×1440)@25/30 fps.
- H.265 codec, high compression rate, ultra-low bit rate.
- Built-in warm light and the max. illumination distance is 30 m.
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments.
- Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes.
- Intelligent monitoring: Intrusion, tripwire (the two functions support the classification and accurate detection of vehicle and human).
- Abnormality detection: Motion detection, video tampering, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection.
- Supports max. 256 G Micro SD card; built in Mic.
- 12 VDC/PoE power supply.
- IP67 protection.
- SMD Plus.



### Full-color

With high-performance sensor and large aperture lens, Dahua Full-color technology can display clear colorful image in the environment of ultra-low illuminance. With this photosensitivity technology, the camera can capture more available light, and display more colorful image details.

### Protection (IP67, Wide Voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normally after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows  $\pm 30\%$  (for some power supplies) input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

## Technical Specification

### Camera

|                            |                                    |
|----------------------------|------------------------------------|
| Image Sensor               | 1/2.9" CMOS                        |
| Max. Resolution            | 2688 (H) × 1520 (V)                |
| ROM                        | 128 MB                             |
| RAM                        | 128 MB                             |
| Scanning System            | Progressive                        |
| Electronic Shutter Speed   | Auto/Manual 1/3 s–1/100,000 s      |
| Min. Illumination          | 0.004 Lux@F1.0                     |
| S/N Ratio                  | >56 dB                             |
| Illumination Distance      | Up to 30 m (98.43 ft) (Warm light) |
| Illuminator On/Off Control | Auto; Manual                       |
| Illuminator Number         | 2 (Warm light)                     |

### Lens

|                      |                                                                                                                                                                                                                                                                                                                                                                                 |                       |                       |                      |                     |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|----------------------|---------------------|
| Lens Type            | Fixed-focal                                                                                                                                                                                                                                                                                                                                                                     |                       |                       |                      |                     |
| Lens Mount           | M12                                                                                                                                                                                                                                                                                                                                                                             |                       |                       |                      |                     |
| Focal Length         | 2.8 mm; 3.6 mm                                                                                                                                                                                                                                                                                                                                                                  |                       |                       |                      |                     |
| Max. Aperture        | F1.0                                                                                                                                                                                                                                                                                                                                                                            |                       |                       |                      |                     |
| Field of View        | 2.8 mm: H: 101°; V: 53°; D: 120°<br>3.6 mm: H: 82°; V: 43°; D: 94°                                                                                                                                                                                                                                                                                                              |                       |                       |                      |                     |
| Iris Control         | Fixed                                                                                                                                                                                                                                                                                                                                                                           |                       |                       |                      |                     |
| Close Focus Distance | 2.8 mm: 1.5 m (4.92ft)<br>3.6 mm: 2.2 m (7.22 ft)                                                                                                                                                                                                                                                                                                                               |                       |                       |                      |                     |
| DORI Distance        | Lens                                                                                                                                                                                                                                                                                                                                                                            | Detect                | Observe               | Recognize            | Identify            |
|                      | 2.8 mm                                                                                                                                                                                                                                                                                                                                                                          | 66.0 m<br>(216.54 ft) | 26.4 m<br>(86.61 ft)  | 13.2 m<br>(43.31 ft) | 6.6 m<br>(21.65 ft) |
|                      | 3.6 mm                                                                                                                                                                                                                                                                                                                                                                          | 78.0 m<br>(255.91 ft) | 31.2 m<br>(102.36 ft) | 15.6 m<br>(51.18 ft) | 7.8 m<br>(25.59 ft) |
|                      | *DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The numbers in this table do not reflect intelligent function distances. For intelligent function distances, refer to installation and commissioning manual/project design tool. |                       |                       |                      |                     |

### Intelligence

|                            |                                                                                                                 |
|----------------------------|-----------------------------------------------------------------------------------------------------------------|
| IVS (Perimeter Protection) | Intrusion, tripwire (the two functions support the classification and accurate detection of vehicle and human). |
| Smart Search               | Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos |

### Video

|                   |                                                                                                                                                                                                                                                                         |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Compression | H.265; H.264; H.264H; H.264B; MJPEG (Only supported by the sub stream)                                                                                                                                                                                                  |
| Smart Codec       | Smart H.265+; Smart H.264+                                                                                                                                                                                                                                              |
| Video Frame Rate  | Main stream: 2688 × 1520@(1–20 fps)/2560 × 1440@(1–25/30 fps)<br>Sub stream: 704 × 576@(1–25 fps)/704 × 480@(1–30 fps)<br>*The values above are the max. frame rates of each stream; for multiple streams, the values will be subjected to the total encoding capacity. |

|                          |                                                                                                                                                                                         |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Stream Capability        | 2 streams                                                                                                                                                                               |
| Resolution               | 4M (2688 × 1520); 3.6M (2560 × 1440); 3M (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240) |
| Bit Rate Control         | CBR/VBR                                                                                                                                                                                 |
| Video Bit Rate           | H.264: 32 kbps–6144 kbps<br>H.265: 12 kbps–6144 kbps                                                                                                                                    |
| Day/Night                | Color/B/W                                                                                                                                                                               |
| BLC                      | Yes                                                                                                                                                                                     |
| HLC                      | Yes                                                                                                                                                                                     |
| WDR                      | 120 dB                                                                                                                                                                                  |
| White Balance            | Auto; natural; street lamp; outdoor; manual; regional custom                                                                                                                            |
| Gain Control             | Auto; Manual                                                                                                                                                                            |
| Noise Reduction          | 3D NR                                                                                                                                                                                   |
| Motion Detection         | OFF/ON (4 areas, rectangular)                                                                                                                                                           |
| Region of Interest (RoI) | Yes (4 areas)                                                                                                                                                                           |
| Smart Illumination       | Yes                                                                                                                                                                                     |
| Image Rotation           | 0°/90°/180°/270° (Support 90°/270° with 2688 × 1520 resolution and lower)                                                                                                               |
| Mirror                   | Yes                                                                                                                                                                                     |
| Privacy Masking          | 4 areas                                                                                                                                                                                 |

### Audio

|                   |                             |
|-------------------|-----------------------------|
| Built-in MIC      | Yes                         |
| Audio Compression | G.711a; G.711Mu; G.726; PCM |

### Alarm

|             |                                                                                                                                                                                                                  |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm Event | No SD card; SD card full; SD card error; network disconnection; IP conflict; illegal access; motion detection; video tampering; tripwire; intrusion; audio detection; voltage detection; SMD; security exception |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### Network

|                     |                                                                                                                                                                               |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network Port        | RJ-45 (10/100 Base-T)                                                                                                                                                         |
| SDK and API         | Yes                                                                                                                                                                           |
| Network Protocol    | IPv4; IPv6; HTTP; TCP; UDP; ARP; RTP ; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; NTP; Multicast; ICMP; IGMP; P2P                                                    |
| Interoperability    | ONVIF (Profile S; Profile G; Profile T); CGI                                                                                                                                  |
| User/Host           | 20 (Total bandwidth: 48 M)                                                                                                                                                    |
| Storage             | FTP; SFTP; Micro SD card (support max. 256 GB)                                                                                                                                |
| Browser             | IE; Chrome; Firefox                                                                                                                                                           |
| Management Software | Smart PSS Lite;DSS;DMSS                                                                                                                                                       |
| Mobile Client       | iOS; Android                                                                                                                                                                  |
| Security            | Trusted execution;Digest;security logs;WSSE;account lockout;syslog;802.1x;IP/MAC filtering;HTTPS;trusted upgrade;trusted boot;generation and importing of X.509 certification |

## Certification

|                   |                                                                                                                                |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Certifications    | CE-LVD: EN62368-1;<br>CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU                                               |
| Power             |                                                                                                                                |
| Power Supply      | 12 VDC/PoE (802.3af)                                                                                                           |
| Power Consumption | Basic: 2.7 W (12 VDC); 3.6 W (PoE)<br>Max. (H.265+ intelligence on + WDR + illuminator intensity): 6.8 W (12 VDC); 8.3 W (PoE) |

## Environment

|                       |                                      |
|-----------------------|--------------------------------------|
| Operating Temperature | −40 °C to +60 °C (−40 °F to +140 °F) |
| Operating Humidity    | ≤95%                                 |
| Storage Temperature   | −40 °C to +60 °C (−40 °F to +140 °F) |
| Storage Humidity      | ≤95%                                 |
| Protection            | IP67                                 |

## Structure

|                    |                                                                     |
|--------------------|---------------------------------------------------------------------|
| Casing Material    | Metal                                                               |
| Product Dimensions | 70.0 mm × 70.0 mm × 166.2 mm (2.76" × 2.76" × 6.54")<br>(L × W × H) |
| Net Weight         | 0.47 kg (1.04 lb)                                                   |
| Gross Weight       | 0.59 kg (1.30 lb)                                                   |

## Ordering Information

| Type                      | Model                 | Description                                               |
|---------------------------|-----------------------|-----------------------------------------------------------|
| 4MP Camera                | DH-IPC-HFW2449S-S-LED | 4MP Full-color Fixed-focal Bullet Wizsense Network Camera |
| Accessories<br>(Optional) | PFA134                | Junction Box                                              |
|                           | PFA130-E              | Water-proof Junction Box                                  |
|                           | PFA152-E              | Pole Mount Bracket                                        |
|                           | PFM321D               | 12 VDC 1A Power Adapter                                   |
|                           | PFM900-E              | Integrated Mount Tester                                   |
|                           | TF-P100               | MicroSD Memory Card                                       |

## Accessories

### Optional:



PFA134  
Junction Box



PFA130-E  
Water-proof  
Junction Box



PFA152-E  
Pole Mount  
Bracket




PFM321D  
12 VDC 1 A  
Power Adapter



PFM900-E  
Integrated  
Mount Tester



TF-P100  
MicroSD  
Memory Card

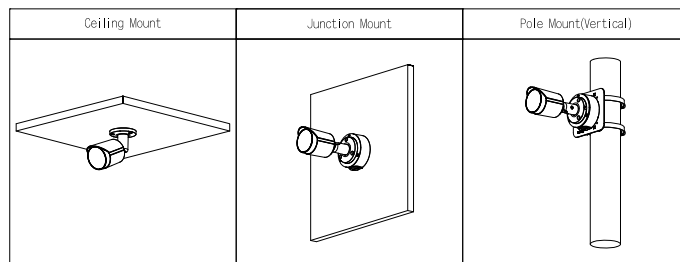

## Dimensions (mm[inch])

