


DH-PFM3973M-48

48-port UTP Blank Patch Panel

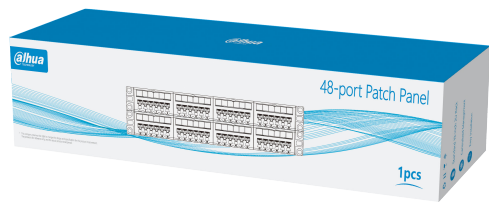

- 2U unshielded 48-port blank patch panel.
- Standard 19-inch cabinet mounting.
- Using high-quality cold-rolled steel, which has high strength and is resistance to rust.
- Adapt to standard keystone jackets.

Series Overview

The Patch Panel is designed to work with copper cables, creating a cost-effective horizontal channel for your wiring needs. It is ideal for facilitating horizontal connections between devices, allowing for easy pairing and port connections.

Technical Specification

Category

Category	Blank patch panel
Shielding Type	Unshielded

Material Specifications

Panel Material	Cold-Rolled Steel+ABS(UL94V-0)
----------------	--------------------------------

General Specifications

Flammability Rating	UL94V-0
Color	Black
Rack Unit	2U
Number Of Ports	48
Product Dimensions	482.60 mm × 86.20 mm × 88.40 mm (19.00" × 3.39" × 3.48") (L × W × H)
Packaging Dimensions	515.00 mm × 95.00 mm × 90.00 mm (20.28" × 3.74" × 3.54") (L × W × H)
Packaging Method	1 pcs in 1 carton, and 20 cartons in 1 package
Operating Temperature	−20 °C to +75 °C (−4 °F to +167 °F)
Operating Humidity	10%–90% (RH)
Storage Temperature	−20 °C to +75 °C (−4 °F to +167 °F)
Storage Humidity	10%–90% (RH)
Net Weight	0.94 kg (2.07 lb)

Gross Weight	1.14 kg (2.51 lb)
--------------	-------------------

Accessory

Nut quantity	8
Screw quantity	8

Ordering Information

Type	Model	Description
Patch Panel	DH-PFM3973M-48	48-port UTP Blank Patch Panel

Dimensions (mm[inch])

