


# DHI-VTO7631Q

## IP Face Recognition Apartment Door Station



### Scene

Ideal for use in multiple scenes such as apartment, office buildings, compound buildings, communities, etc.

### Technical Specification

#### System

Main Processor	Embedded Processor
Operating System	Embedded Linux OS
Interoperability	ONVIF; CGI
Network Protocol	RTP; SIP; DNS; SSH; RTSP; RTMP; FTP; HTTP/HTTPS; ONVIF

#### Basic

Screen Type	Capacitive Touchscreen
Display Screen	7-inch display screen
Screen Resolution	600 (H) × 1024 (V)
Camera	1/2.8" 2 MP CMOS high-definition, low illumination, dual cameras
Field of View	H: 65°; V: 40°; D: 73°
WDR	DWDR
Noise Reduction	3D NR
Video Compression	H.264; H.265
Video Resolution	Main stream: 720P/D1/WVGA; Sub stream: 1080P/720P/D1/WVGA/CIF/QVGA
Video Frame Rate	PAL: 25 fps; NTSC: 30 fps
Video Bit Rate	256 kbps–4,096 kbps
Light Compensation	Auto IR
Audio Compression	G.711a; G.711u; PCM
Audio Input	1 channel
Audio Output	Built-in speaker

- 7" LCD with a resolution of 600 × 1024.
- 2 MP HD dual-lens camera.
- Supports 100,000 users, 50,000 faces, and 50,000 cards.
- Recognizes faces 0.3 m to 1.5 m away (0.98 ft–4.92 ft) at an accuracy of 99.9%, and compares 1 face with N faces at the speed of 0.2 seconds/person.
- Liveness detection is used to detect spoof attempt, such as using a photo or video to gain access.
- Displays text and image information released by the management center.
- Offers multiple types of alarms such as duress, tamper, emergency and alarms from door detectors.
- Supports leaving audio and video messages when no one responds through the VTH. (An SD card is required.)
- Supports multiple unlock methods including password, IC card and face, and unlocks remotely.
- Unlocks the door through the VTH, management center and app.
- Outputs 1-channel 12 VDC and 700 mA to supply power for the access control module or card reader.
- IP65 rated (Silicone sealant is required for the flush mount plate.)



Audio Mode	Two-way audio
Audio Enhancement	Echo suppression/digital noise reduction
Audio Bit Rate	16 kHz, 16 bit

### Function

Communication Mode	Full digital
Verification Method	Remote; Face Recognition; Password; Card
Auto Snapshot	Yes
Information Release	Receive and view text information released by the management center.
Elevator Control	Residents and visitors can call elevators. Permissions can also be granted to access floors through access control.
Leave Videos	Yes (SD card inserted in VTO is needed)
Storage	Supports Micro SD card (up to 128 GB)
Web Configuration	Yes
Auto Registration	Yes

### RFID

Card Type	IC card
-----------	---------

Modulation Type	ASK
Frequency Range	13.56 MHz
Max. Transmission Power	42 dBuA/m @10 m

#### Performance

Card Reading Distance	0 cm–4 cm (IC card)
Face Recognition Height Range	1.2 m–2.0 m (3.94 ft–6.56 ft)
Face Recognition Distance	0.3 m–1.5 m (0.98 ft–4.92 ft)
Face Recognition Accuracy	99.9%
Face Recognition Time	0.2 s
Casing Material	Tempered glass; Aluminum alloy

#### Capacity

Card Capacity	50,000
Face Image Capacity	50,000
User Capacity	100,000

#### Port

RS-485	1 channel
Wiegand	1 channel
Alarm Input	2 channels
Alarm Output	2 channels
Power Output	1 port (12 V, 700 mA)
Exit Button	1 channel
Door Status Detection	1 channel
Lock Control	1 channel, open by default
Network Port	1 × 10 Mbps/100 Mbps Ethernet port

#### Alarm

Tamper Alarm	Yes
--------------	-----

#### General



Appearance Color	Black
Power Supply	12 VDC, 3 A
Power Adapter	Optional
Installation	Surface Mount; Flush Mount
Certifications	CE
Accessory	Power supply (optional); Flush mount box (optional); Surface Mounted (optional)
Product Dimensions	219.7 mm × 113.4 mm × 24.3 mm (8.65" × 4.46" × 0.96") (H × W × D)
Protection	IP65 rated (Silicone sealant is required.)
Operating Temperature	–30 °C to +60 °C (–22 °F to +140 °F)
Operating Humidity	0%–90% (RH), non-condensing
Operating Environment	Outdoor

Operating Altitude	0 m–1,300 m (0 ft–4,265.09 ft)
Power Consumption	≤ 8 W (standby), ≤ 10 W (working). These two values of power consumption do not contain the output power.
Gross Weight	0.82 kg (1.81 lb)
Storage Temperature	–20 °C to +70 °C (–4 °F to +158 °F)
Storage Humidity	30%–75%


#### Ordering Information

Type	Model	Description
Door Station	DHI-VTO7631Q	IP Face Recognition Apartment Door Station
Accessories	VTM93	Surface Mounted Box
	VTM94	Flush Mounted Box

#### Installation

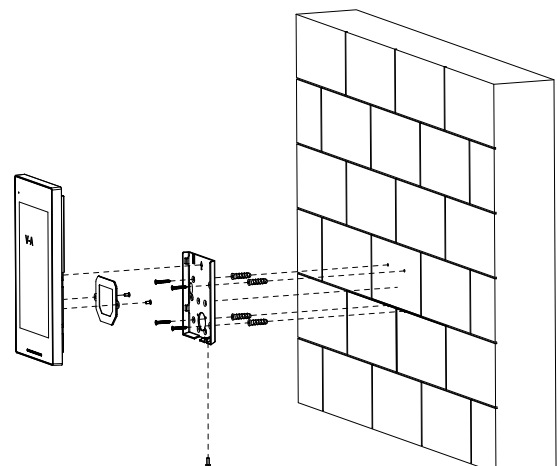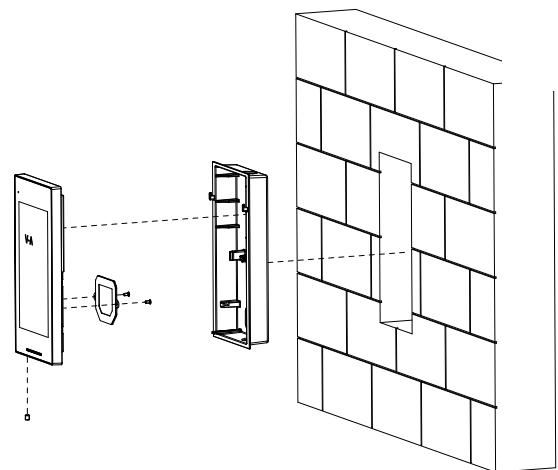

Dimensions (mm[inch])

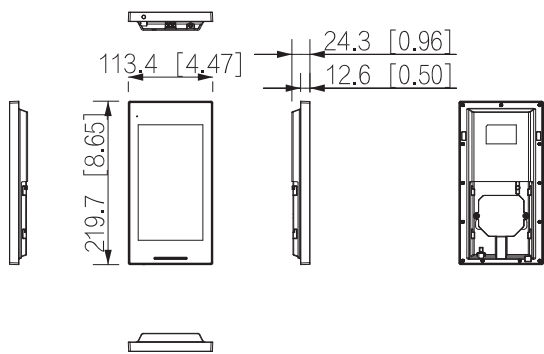

Application

