

DH-CS4010-8ET-60-PAK

10-Port Desktop Switch with 8-Port PoE



- 8 × RJ45 10/100 Mbps PoE ports, 2 × RJ45 Gigabit ports.
- 60 W total PoE budget, 802.3af/at on all PoE ports, additional Hi-PoE on orange port.
- Wide operating temperature ranging from -10 °C to 55 °C.



PoE Watchdog

Adopts the innovative PoE Watchdog. It enables the switch to automatically detect port status and restart the failed ports to recover connection in case of IPC connection exception.

Loop Protection

When a loop is detected, the loop alarm will be triggered and the elimination mechanism will activate to prevent broadcast storms from occurring.

Hi-PoE 60W (Orange Port)

In addition to the IEEE802.3af and IEEE802.3at standards, orange port also supports a maximum power output of 60W for powering high-power devices.

Scene

Suitable for scenes such as houses, factories and offices.

Series Overview

Highly intuitive, the Access Switch can be used in local networks. With its full metal design, the switch has great heat dissipation and can operate in temperatures ranging -10°C to 55°C(+14°F to +131°F). It offers EMC and has protection against overvoltage, overcurrent, static electricity, lightning strikes, pulses and other types of interference. For the PoE series Switch, power is supplied up to 250 meters away. The orange port supplies up to 60 W and the red port provides up to 90 W. The switch can be used in small and medium-sized businesses such as supermarkets, offices, restaurants, cafés and hotels.

Functions

Long Distance PoE

The transmission distance of a PoE port can be up to 250 m, meeting the requirement of wired transmission (bandwidth reduced to 10 Mbps).

Technical Specification

Basic	
Layer	Layer 2
Switching Capacity	5.6 Gbps
Packet Forwarding Rate	4.17 Mpps
Description of Function Slots	Port 1-8: 8 × RJ45 10/100 Mbps (PoE); Port 9-10: 2 × RJ45 10/100/1000 Mbps (uplink)
Operating Temperature	−10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	5%–95% (RH), non-condensing
Storage Temperature	−40 °C to +70 °C (−40 °F to +158 °F)
Storage Humidity	5%–95% (RH), non-condensing
Power Supply	External power supply: 53 VDC, 1.226 A
Power Consumption	Idling: ≤3 W Full load: 65 W
Statics Protection	Air discharge: 8 kV; Contact discharge: 6 kV
Lightning Protection	Common mode: 4 kV Differential mode: 2 kV
Net Weight	0.48 kg (1.06 lb)
Gross Weight	1.12 kg (2.47 lb)
Product Dimensions	190 mm × 106 mm × 30 mm (7.48" × 4.17" × 1.18") (L × W × H)
Packaging Dimensions	256 mm × 244 mm × 87 mm (10.07" × 9.61" × 3.43") (L × W × H)
Casing Material	Sheet metal
Installation	Desktop mount; wall mount

PoE	
PoE	Yes
PoE Power	Port 1 ≤ 60 W, Port 2-8 ≤ 30 W, total ≤ 60 W
PoE Protocol	IEEE802.3af; IEEE802.3at; Hi-PoE
PoE Pin Assignment	1,2,4,5 (V+) ,3,6,7,8 (V-)
Long Distance PoE Transmission	Yes

Hardware	
Reset Button	1

Performance	
MTBF	150 years
Packet Buffer Size	4 Mbit
Jumbo Frame	9216 Byte
MAC Table Size	8K
Communication Standard	IEEE 802.3 IEEE 802.3u IEEE 802.3x IEEE 802.3ab IEEE 802.3az
VLAN Number	32

Feature	
VLAN Function	IEEE 802.1Q VLAN
Port Feature	IEEE 802.3x Flow Control Unknown Unicast Suppression Multicast Storm Control Broadcast Storm Control MAC+Port Binding Loop Prevention
Mirror	N:1 Mirroring Local Port Mirroring
Reliability	LLDP
DHCP Function	DHCP Client
Security	Port Isolation

General	
Packing List	Quick Start Guide × 1 Legal and Regulatory Information × 1 Power adapter × 1 Power cord × 1

Transmission Performance

Switch power supply voltage 54V.
CAT6. Max. DC resistance < 8 Ω/100 m

Cable(m)	Load Capacity(W)	Bandwidth(Mbps)
----------	------------------	-----------------

IEEE802.3bt 90W		
100	71.3	100
150	62	10
200	51	10
250	40	10

Hi-PoE 60W		
100	46	100
150	42	10
200	37	10
250	32	10


IEEE802.3at 30W		
100	25.5	100
150	25.5	10
200	25.5	10
250	24	10

Note: Data from this table was collected by Dahua test lab and is for reference only. The actual transmission distance may vary due to power consumption of connected devices or the cable type and status.


Ordering Information

Type	Model	Description
PoE Switch	DH-CS4010-8ET-60-PAK	10-Port Access Desktop Switch with 8-Port PoE

Installation

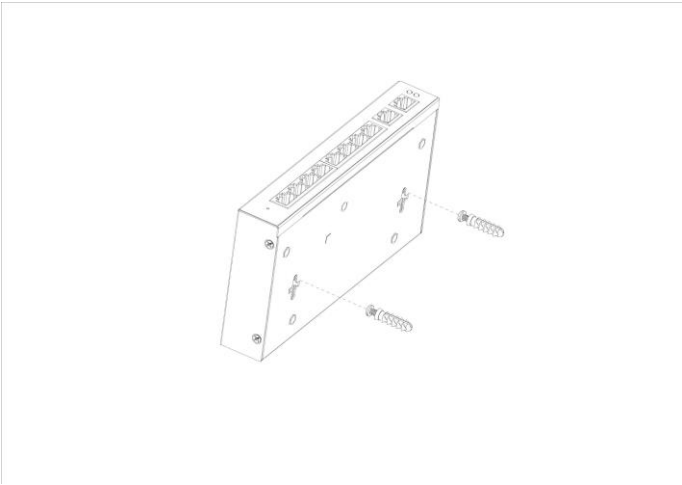

Panels

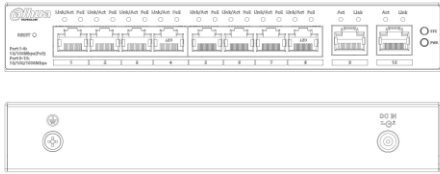

Dimensions (mm[inch])

